

QNAP

**Stay
one
step
ahead**



Product Selection Guide



QES operation system

The QES operating system is based on the simple and efficient FreeBSD kernel and the ZFS file system that has been proven through years of experience to be most suitable for high-end enterprise applications.



Focus on data integrity

QES uses its end-to-end checksums to detect and correct silent data corruption caused by hardware defects, bugs in firmware or metadata errors. If an integrity violation is detected, QES automatically repairs the damage using data from the other mirror before the data is passed to applications.



Data deduplication and compression

QES supports block-based data deduplication to reclaim storage used by redundant/repeated data and in-line data compression to shrink file sizes. Both functions optimize storage utilization and provide cost savings for businesses when using SSDs.



Dual Controller

Active-Active high availability with optimal storage efficiency

The QES-based ES NAS is powered by two processors and features dual active-active controller architecture, ensuring businesses with nearly zero downtime high availability as the standby controller can quickly take over if one controller breaks down.



Active-Active Dual-controller system

Both controllers of the ES NAS can carry traffic, along with Copy-To-Flash protection against power failure and the dual-path SAS interface design. Besides conserving computing resources, a high-speed, uninterrupted, and high-availability storage service is also provided through communication protocols such as SMB, NFS and iSCSI.

All flash storage. ultimate performance

QNAP's All-Flash Storage Solutions feature ZFS data reduction and SSD optimization technologies to maximize SSD performance and lifespan – perfect for keeping your business agile and efficient!



Flash-optimized storage

Write amplification is an undesirable effect of SSDs, bringing challenges to flash memory performance and endurance. QNAP's exclusive Write Coalescing algorithm is engineered for flash optimization by transforming all random writes to sequential writes along with reduced I/O. It not only effectively increases random write performance for all-flash environments but can also improve SSD lifespans.



Quality of service

Quality of Service helps optimize resource allocation based on I/O and bandwidth for LUNs/shared folders at different service levels. QoS prioritizes the performance of business-critical applications that run concurrently with non-critical applications as well as reducing "noisy neighbor" problems.



All Flash NAS



Inline data compression and compaction

Inline data compression shrinks file sizes to lower storage I/O workloads for improved performance. It also helps optimize storage utilization of SSD over-provisioning.



SSD TRIM

While almost all SSDs have shown consistent write performance degradation, TRIM helps overcome write performance drops. SSD TRIM allows the system to inform SSDs to delete unneeded data blocks. Deletion tasks are processed during system idle times, meaning it does not have to wait for when new data is written to the block.



High-performance ZFS-based OS with greater reliability

QNAP's "QuTS hero" operating system combines the app-based QTS with a 128-bit ZFS file system to provide flexible storage management, comprehensive data protection and optimized performance to meet the needs of business-critical applications.

ZFS

Efficient data reduction technology

Inline data deduplication is block-based and runs before data is written to storage. This greatly optimizes storage usage while significantly decreasing storage capacity requirements. Coupled with inline compression and inline compaction technologies, ZFS significantly reduces the overall storage footprint - especially helpful for increasing SSD storage efficiency when highly-repetitive data or massive small files are generated.




Near-limitless, instant snapshots

ZFS supports up to 65,535 snapshots for iSCSI LUN and shared folders to accomplish well-rounded snapshot versioning. If 1 snapshot is created every hour, 24 snapshots per day, then up to 7 years of snapshots can be created without needing to delete any!



Up to petabyte capacity per shared folder

The 128-bit ZFS filesystem has huge capacity potential and supports native handling of standard RAID levels and additional ZFS RAID layouts (RAID Z). ZFS-based QNAP storage solutions provide up to 1 PB capacity for individual shared folders, enabling enterprises to tackle storage-demanding applications




QUTS hero

QUTS hero



Real-time SnapSync

The advanced block-based real-time SnapSync ensures that the primary NAS and the secondary NAS always keep the same data, providing the strongest support for nonstop business operations and helping users remove the risk of data loss!




High-speed 25GbE networking

Enable lightning-fast throughput for bandwidth-demanding tasks such as virtualization, massive data transmission, and fast backup/restoration



25GbE-ready All-flash NAS

The TS-h3088XU-RP provides a built-in dual-port 25GbE SFP28 SmartNIC with the NVIDIA® Mellanox ConnectX-4 Lx SmartNIC controller that supports iSCSI Extensions for RDMA (iSER) to increase performance of data transfer between NAS and ESXi server and offload CPU workloads.

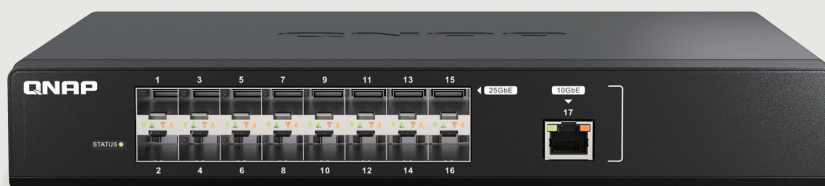

Affordable 25GbE managed switch

The QSW-M5216-1T is a 25GbE Layer 2 web managed switch that provides flexible network interfaces for high compatibility at an affordable price, enabling small businesses to quickly upgrade to an ultra-high-speed backbone network by integrating to existing network infrastructure.



10GbE connectivity: The future is now!

10GbE connectivity improves overall network performance and everyday tasks with ten times the bandwidth of 1GbE. By offering 10GbE-ready NAS, network adapters and switches, QNAP is a one-stop provider for everything you need to create your own 10GbE environment.




10GbE NAS solutions

QNAP provides a range of NAS with integrated hardware and software solutions that can make the most of the incredible bandwidth provided by 10GbE networks.



10GbE switches

QNAP's QSW Series 10GbE switches supports 10GBASE-T and NBASE-T standards, allowing you to take advantage of higher network speeds with existing Cat 5e and 6a cables. Both SFP+ (fiber) and RJ45 (copper) ports are available for servicing a range of network needs.

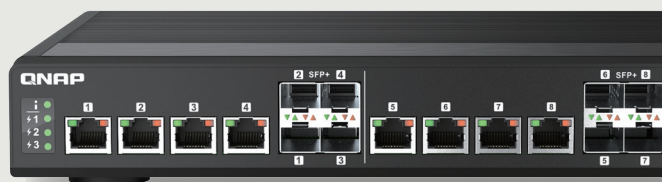


10GbE network adapters

QNAP provides 10GbE PCIe expansion card and Thunderbolt to 10GbE adapters to empower devices with 10GbE connectivity. The QM2 Expansion Card not only includes 10GbE connectivity, but also provides the ability to add M.2 SSDs to your workstation or NAS.

2.5GbE is not just for offices, but also for homes

The lack of consumer-grade switches has made it hard for home and personal users to adopt 2.5GbE/5GbE networking. QNAP now offers cost-effective multi-port switches that support 10G/5G/2.5G/1G/100M Ethernet, helping you to transform your home network at a wallet-friendly price.

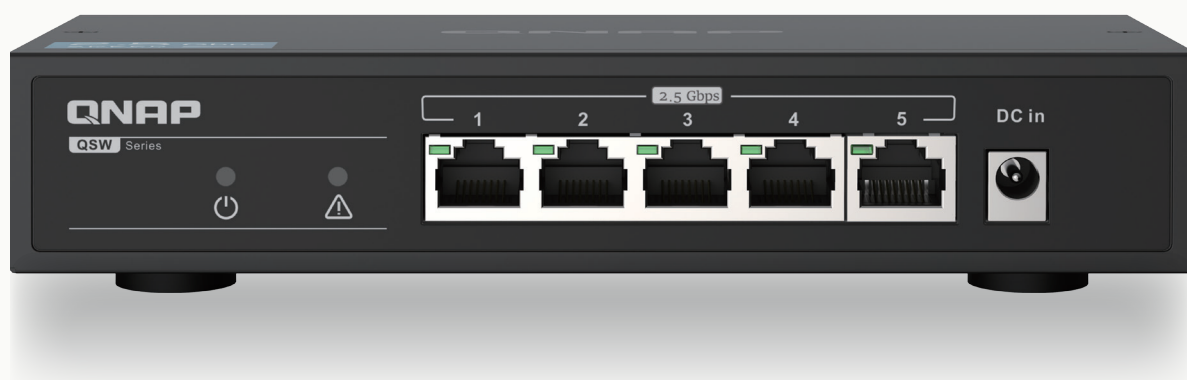

2.5GbE switches

QNAP offers a 10GbE switch series supporting five speeds (10G / 5G / 2.5G / 1G / 100M) and a 2.5GbE switch series. With 2.5GbE ports, the QNAP switch can instantly upgrade your network to take advantage of 2.5GbE-enabled devices and NAS.



Works with existing cables

No special cables or connectors are required to take advantage of 2.5GbE. Simply use your existing CAT5e cables as normal with your new 2.5GbE infrastructure.



2.5GbE Solution



2.5 times faster


2.5GbE is 2.5 times faster than standard Ethernet (1GbE), increasing network performance to boost productivity.



More affordable

If you can't budget a 10GbE upgrade at this time, the more affordable 2.5GbE provides a notable improvement in current Ethernet speeds.





Breakthrough performance and outstanding connectivity with Thunderbolt NAS



QNAP offers the very best in connectivity with Thunderbolt™ NAS. Thunderbolt™ NAS is far superior in providing both the best in speed and versatility that non-Thunderbolt NAS cannot offer, video production professionals using QNAP Thunderbolt™ NAS enjoy efficient workflows, unprecedented speed, and incredible versatility.



Ultra-high speed transfer

Edit right off your NAS with blazing fast Thunderbolt™ 3 connectivity. With potential speeds of up to 40Gbps, connect your compatible Macs and other Thunderbolt™ 3 devices directly to the NAS and work unaffected by other network traffic.



Facilitate 10GbE workflows with Thunderbolt-to-Ethernet

The innovative T2E Converter bridges Thunderbolt and Ethernet networks, allowing Thunderbolt-enabled computers to connect to these networks via their Thunderbolt connection to the QNAP Thunderbolt NAS. This saves a 10GbE port and eliminates the need for extra adapters or network cards.



Thunderbolt NAS Solution



High availability with USB Type-C

The usage of USB Type-C by Thunderbolt 3 provides a universal connection from QNAP NAS to Thunderbolt devices as well as countless USB Type-C devices through a single cable, allowing file sharing and centralized data storage without the hassle of stringing multiple cables.



Collaboration station for Mac and Windows

The increased bandwidth of Thunderbolt 3 enables smooth video editing and faster file sharing for photographers, video editors and graphic designers. Up to 2 Thunderbolt™ devices can be connected to the QNAP Thunderbolt NAS to process real-time photo and audio editing simultaneously without impacting system performance.






Easily build your personal cloud and access anywhere



In contrast to the limited storage space and potential security issues with public cloud services, the QNAP NAS is advantageous for establishing a secure and large-capacity personal cloud.

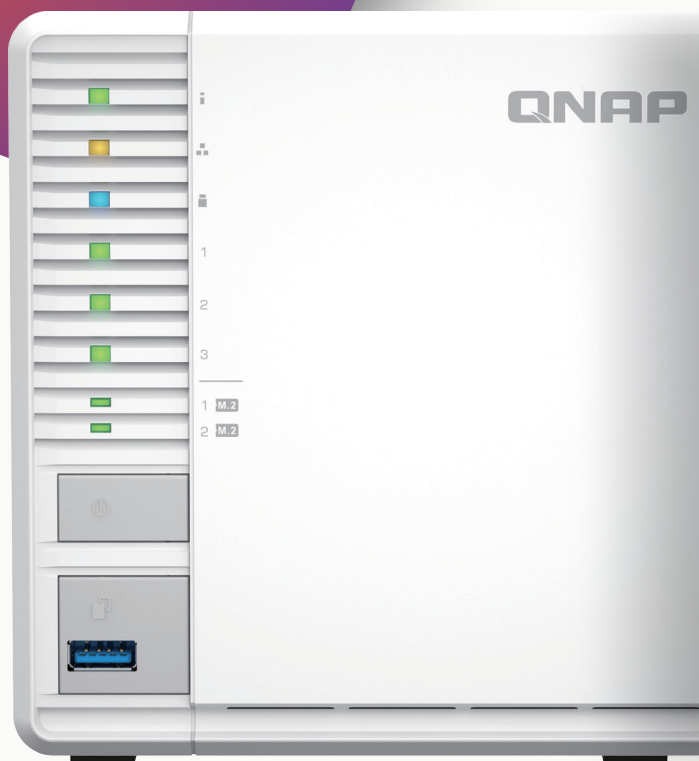



An easy-to-use, all-in-one backup solution

The QNAP NAS can do many things, but at its heart is a complete backup solution to protect your files and data. By regularly backing up your files and device content, you can make data loss a thing of the past.



Greater multimedia enjoyment

The QNAP NAS comes with a wide range of media applications, including Photo Station, Video Station and Music Station, allowing you to easily manage and view your media files.



Easy and secure remote connection with myQNAPcloud

myQNAPcloud allows you to remain connected to your QNAP NAS using a unique domain name. No complex routing or configuration is required, and myQNAPcloud strengthens SSL Certificate keys to 2048-bits to enable secure remote access, management, and sharing files and check your system status from anywhere.



A secure backup center with snapshot protection

Snapshots are essential for NAS data protection, and their block-level feature makes it a dependable data protection method in the face of growing ransomware threats.



Connect to a TV or monitor with HDMI


With HDMI output, the QNAP NAS allows you to directly enjoy multimedia content, use web browsers, manage your NAS, or watch recorded surveillance footage or live feeds on your NAS.





Next-generation intelligent IP surveillance and remote backup solution

With the subscription-based QVR Elite smart surveillance solution you only pay for the channel licenses you need, allowing you to affordably safeguard your property. You can arrange a dedicated, independent storage space for surveillance data on the QNAP NAS and enjoy simplified camera management, storage space allocation, camera live viewing and playback. Recordings are saved as MP4 files for playback on nearly every device.



Direct monitoring on an HDMI display

Easily play recordings with a connected HDMI display using the QVR Smart Client. Search for event recordings within a time period and detection area specified in the user interface.



Leverage AI-based applications for value-added services

QVR Elite's surveillance footage can be processed by multiple QNAP AI-based video analytics applications (e.g. QVR Face, QVR Human, QVR DoorAccess) to empower your surveillance systems with smart door access, facial recognition, human counting capabilities and more.



QVR Pro Client: Centralized monitoring and management

QVR Pro Client enables you to monitor multiple channels simultaneously. Flexibly switch between live view and playback mode to easily fulfill centralized monitoring and management.



Records using the MP4 video format

QVR Elite records video files in the universally-supported MP4 format, allowing for smooth playback on all your devices. In addition, you can conveniently back up recordings to other QTS / QuTS hero NAS or Cloud storage space using Hybrid Backup Sync or HybridMount.




Easy capacity expansion

You can create multiple recording spaces for QVR Elite recordings. If you run out of storage space, you can easily expand your NAS storage by connecting to QNAP expansion enclosures.



Low cost: flexible subscription plan

QVR Elite is subscription-based, with monthly, yearly, and 3-year subscription plans. You can build a robust surveillance system with a low-cost monthly price of US \$1.99 per channel. You can alter the subscription based on your needs to reach higher cost efficiency.

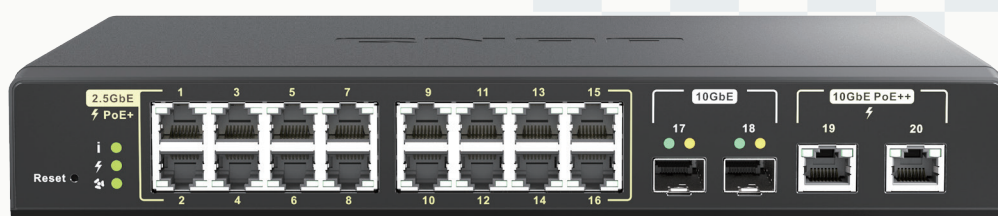

QuWAN SD-WAN solution for resilient IT infrastructure

QNAP's QuWAN SD-WAN solution features Auto Mesh VPN, IPsec encryption and cloud-centric management. Compatible with a wide range of QNAP solutions, QuWAN enables SMBs to efficiently build a dependable network at a cost-effective price, and to facilitate digital transformation, multi-site expansion and remote working.



Auto mesh VPN

Automatically establishes a mesh VPN and removes the need for manual static VPN settings.



Cloud management

The QuWAN Orchestrator provides powerful and convenient central network management.



Network security

Adopts Deep Packet Inspection to analyze L7-Payloads for content information from websites and devices.



WAN optimization

QuWAN adopts load balancing technologies to combine the bandwidth of different ISPs and to prioritize bandwidth utilization.



Cost optimization

Optimizes fiber/network transmission to lower the cost of VPN equipment and bandwidth expenses.



Web GUI

Provides user-friendly functionality, including a dashboard, eMap, traffic analysis, and more.



Enjoy a high-coverage Mesh Wi-Fi experience

Home Wifi Mesh Solution

The QMiro-201W and QMiroPlus-201W support tri-band Wi-Fi 5 wireless transmission and Mesh Wi-Fi handover, ensuring stable Wi-Fi connections and greater signal quality via a Mesh Wi-Fi network.




Connect your Home with High-Coverage Tri-Band Mesh Wi-Fi

QMiro-201W / QMiroPlus-201W adopts Wi-Fi Handover technology, allowing multiple users to be automatically connected to the router with the strongest Wi-Fi signal with a single SSID. With dual-band 2.4GHz/5GHz, QMiro-201W / QMiroPlus-201W provides a dedicated Mesh 5GHz frequency for high-bandwidth connections between Mesh Wi-Fi routers, guaranteeing smooth and stable Wi-Fi connections.



Dedicated Tri-band Mesh Wi-Fi for smooth connections

Supports tri-band Wi-Fi of 2.4GHz, 5GHz and a dedicated Mesh Wi-Fi 5GHz band for high-bandwidth connections between Mesh Wi-Fi routers. Unlike conventional dual-band routers whose 5GHz band must be shared between Wi-Fi clients and Mesh Wi-Fi routers, the QMiro-201W / QMiroPlus-201W guarantees smooth and stable Wi-Fi connections.







External Enclosures (DAS)

Flexible and economical storage expansion

Direct-Attached Storage (DAS) adds additional storage capacity to your PC by being directly connected via USB or another port. Compared with Network-Attached Storage (NAS), DAS is usually plug-and-use to a single PC and is suitable for users who seek to simply expand the storage of a single PC and not the advanced features and network connectivity of a NAS.





External Enclosures (DAS)



RAID Support

QNAP DAS supports various RAID levels to improve performance and data protection.



Simple Interface

The QNAP External RAID Manager helps you monitor the DAS system, drives, and health status. It automatically sends system alerts to your PC if an error occurs.



For NAS Expansion

QNAP DAS can be used with either USB Type-C, SATA, or SAS for faster data transfer and can be easily managed using QTS / QuTS hero Storage & Snapshots. The TL series is suited for NAS expansion.



Effortless Setup

The DAS is completely plug-and-use and does not require any network configuration. An eject button is included to quickly remove the DAS from the connected computer.



For PC Expansion

QNAP DAS are ideal choices for PC users looking to expand their storage space. They use a USB Type-C, SATA, or SAS port for faster data transfer and support software and hardware-controlled RAID configurations for flexible storage configuration.






Versatile feature-rich accessories to enhance the performance of your system

QNAP's comprehensive range of PCIe cards and accessories allows users to upgrade core NAS/PC functionality to meet diverse needs and to maximize work efficiency and productivity.



Wired Network Adapters

- **QNA Series Adapters:** Connect to higher-speed networks over Thunderbolt™ 3 or USB 3.0
- **QM2 series PCIe cards:** Add M.2 SSDs and Network Ports to Your NAS
- **Network Expansion Card:** Flexibly add network ports and bandwidth to boost data transfer performance



Interface Cards

- **QXP SATA Expansion Card:** Expand storage of a PC, server, or QNAP NAS with easy installation
- **Thunderbolt™ 3 Expansion Card:** Transform your NAS into a Thunderbolt™ 3 NAS
- **M.2 Expansion Card:** Add M.2 SSDs to your NAS and PC
- **USB Expansion Card:** Increase USB transfer speed with a USB expansion card
- **Fibre Channel Expansion Card:** Add QNAP NAS to your existing Fibre Channel SAN environment at an affordable price point




Computing Accelerator Cards





- **Edge TPU Accelerator:** Affordably leverage AI acceleration for faster image recognition on your QNAP NAS
- **Computing Accelerator Card:** Boost performance to meet the demanding workloads



Drive Adapter

- Use two M.2 PCIe NVMe SSD in a U.2 PCIe NVMe SSD drive bay for PC and NAS
- 6Gbps 2.5-inch SATA SSD to 3.5-inch SAS drive adapter
- Use an M.2 PCIe NVMe SSD in a U.2 PCIe NVMe SSD drive bay
- Use two 2.5-inch SATA drives in a single 3.5-inch SATA drive bay with RAID support
- Use two M.2 SATA SSDs in a single 2.5-inch SATA drive bay with RAID support

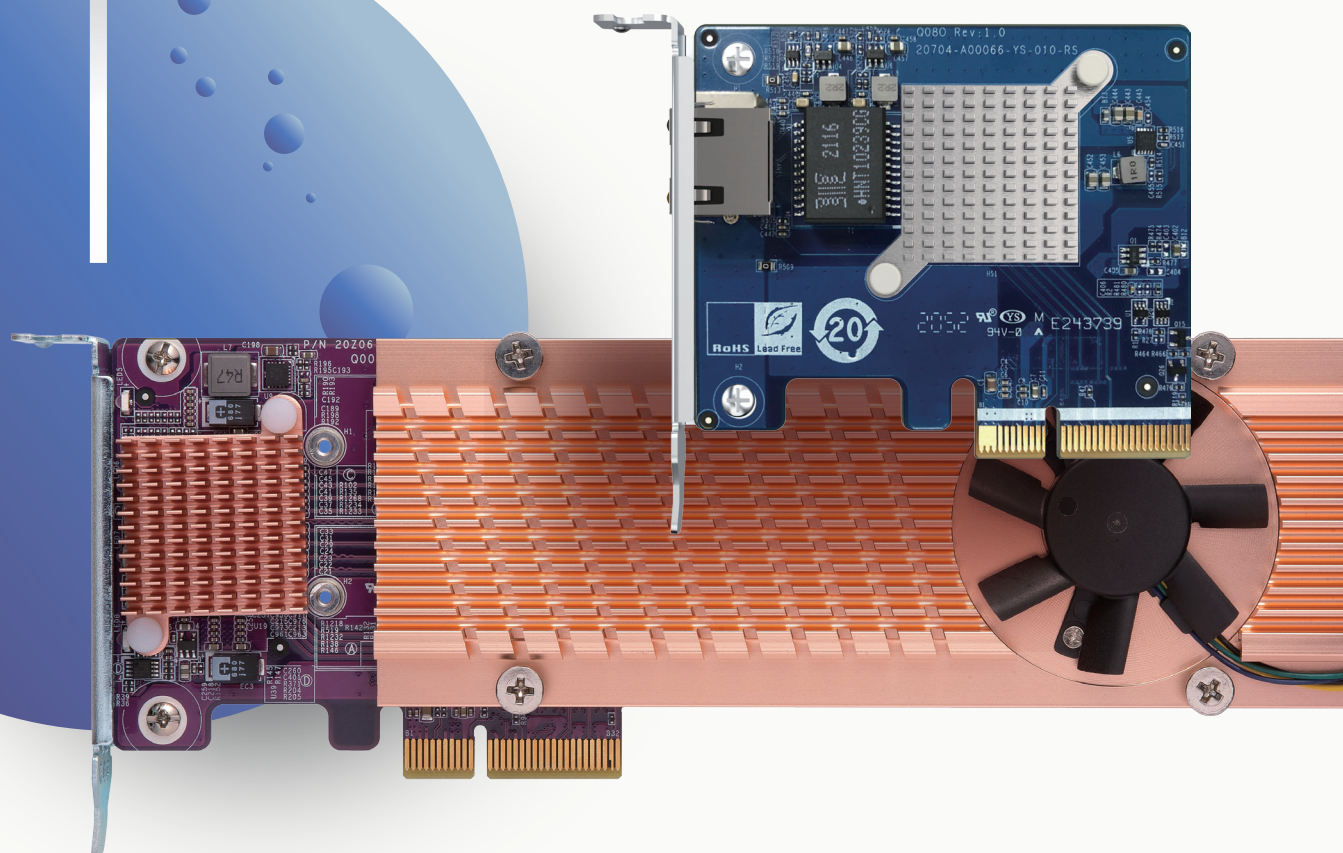






Dual Controller

High-performance
ZFS-based OS
with greater reliability



ES1686dc



Model	ES1686dc-2142IT-128G	ES1686dc-2142IT-96G	ES1686dc-2123IT-64G
CPU	Intel® Xeon® D-2142IT 8-core 1.90 GHz processor (burst up to 3.0 GHz) per controller		Intel® Xeon® D-2123IT 4-core 2.20 GHz processor (burst up to 3.0 GHz) per controller
CPU Architecture	64-bit x86		
Graphic Processors	-		
Floating Point Unit	Yes		
Encryption Engine	Yes (AES-NI)		
Hardware-accelerated Transcoding	-		
System Memory	64 GB RDIMM DDR4 ECC (4 x 16 GB) per controller	48 GB RDIMM DDR4 ECC (4 x 4 GB+4 x 8GB) per controller	32 GB RDIMM DDR4 ECC (4x 8 GB) per controller
Maximum Memory	512 GB (8 x 64GB)		
Memory Slot	8 x R-DIMM/LR-DIMM DDR4 IMPORTANT: You can only use one type of dual in-line memory module (DIMM) at a time. Do not use registered DIMM (RDIMM) with load-reduction DIMM (LRDIMM) memory.		
Drive Bay	16 x 3.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s		
Hot-swappable	Yes		
M.2 Slot	-		
SSD Cache Acceleration Support	Yes Read cache only		
Gigabit Ethernet Port (RJ45)	3 for each controller (one for remote management)		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		
10 Gigabit Ethernet Port	4 x 10GbE SFP+ for each controller		
25 Gigabit Ethernet Port	-		
Thunderbolt Port	-		
PCIe Slot	2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU)		
USB 2.0 port	-		
USB 3.2 Gen 1 port	2 per each controller		
USB 3.2 Gen 2 (10Gbps) Port	-		
HDMI Output	-		
Form Factor	3U Rackmount		
Dimensions (HxWxD)	132 x 483.05 x 630.62		
Weight (Net)	25.83		
Operating temperature	0 - 40 °C (32°F - 104°F)		
Power Supply Unit	Redundant/ Hot Swap Power Vin:90~264VAC;770W		
Power Consumption: Operating Mode, Typical	500.87		
Fan	Hot-swappable fan module (60*60*38mm; 16000RPM/12v/2.8A x 3)		
Kensington Security Slot	-		



ES2486dc



ES2486dc-2142IT-128G

ES2486dc-2142IT-96G

Intel® Xeon® D-2142IT 8-core 1.90 GHz processor, up to 3.0 GHz

64-bit x86

-

Yes

Yes (AES-NI)

-

64 GB RDIMM DDR4 ECC (4 x 16 GB) per controller

48 GB RDIMM DDR4 ECC (4 x 4 GB+4 x 8GB) per controller

512 GB (8 x 64GB)

8 x R-DIMM/LR-DIMM DDR4

IMPORTANT: You can only use one type of dual in-line memory module (DIMM) at a time.
Do not use registered DIMM (RDIMM) with load-reduction DIMM (LRDIMM) memory.

24 x 2.5-inch

SAS 12Gb/s, backward-compatible to SAS 6Gb/s

Yes

-

Yes

Read cache only

3 for each controller (one for remote management)

-

-

4 x 10GbE SFP+ for each controller

-

-

2

Slot 1: PCIe Gen 3 x8 (CPU)

Slot 2: PCIe Gen 3 x8 (CPU)

-

2 per each controller

-

-

2U Rackmount

88.3 x 483 x 545.1

27.41




0 - 40 °C (32°F - 104°F)

Redundant/ Hot Swap Power Vin:90~264VAC;700W

579.59

Hot-swappable fan module (60*60*38mm; 16000RPM/12v/2.8A x 3)

-






All Flash NAS

All flash storage.
ultimate performance



	TS-h3088XU-RP	
		
Model	TS-h3088XU-RP-W1270-64G	TS-h3088XU-RP-W1250-32G
CPU	Intel® Xeon® W-1270 8-core/16-thread processor, up to 5.0 GHz	Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz
CPU Architecture	64-bit x86	
Graphic Processors	-	
Floating Point Unit	Yes	
Encryption Engine	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	
System Memory	64 GB UDIMM DDR4 ECC (4 x 16 GB)	32 GB UDIMM DDR4 ECC (2 x 16 GB)
Maximum Memory	128 GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	
Drive Bay	Front: 24 x 2.5-inch SATA 6Gb/s, 3Gb/s Rear: 6 x 2.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	
M.2 Slot	-	
SSD Cache Acceleration Support	Yes	
Gigabit Ethernet Port (RJ45)	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via an adapter	
10 Gigabit Ethernet Port	Optional via an adapter	
25 Gigabit Ethernet Port	2 x 25GbE SFP28 SmartNIC port	
Thunderbolt Port	-	
PCIe Slot	3 Slot 1: PCIe Gen3 x8 or x4 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 25GbE network adapter. Please reserve this slot for the 25GbE adapter for the best performance. **Slot 1 provides the width of PCIe Gen3 x8 when Slot 2 is not in use, and provides the width of PCIe Gen3 x4 when Slot 2 is in use.	
USB 2.0 port	-	
USB 3.2 Gen 1 port	-	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	
HDMI Output	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	
Form Factor	Rackmount	
Dimensions (HxWxD)	88.3 x 481.07 x 515.02	
Weight (Net)	12.26	
Operating temperature	0 - 40°C (32°F - 104°F)	
Power Supply Unit	550W(x2), 100-240V	
Power Consumption: Operating Mode, Typical	261.81	
Fan	3 x 60mm, 12VDC	
Kensington Security Slot	-	



TS-h2490FU



TS-h2490FU-7302P-128G	TS-h2490FU-7232P-64G
AMD EPYC™ 7302P 16-core/32-thread processor, up to 3.3 GHz	AMD EPYC™ 7232P 8-core/16-thread processor, up to 3.2 GHz
64-bit x86	
-	
-	
Yes (AES-NI)	
-	
128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
4 TB (16 x 256 GB)	
16 x Long-DIMM DDR4	
24 x 2.5-inch U.2 PCIe NVMe	
Yes	
-	
Yes	
-	
2 (also support 10M)	
-	
-	
4 x 25GbE SFP28 SmartNIC port	2 x 25GbE SFP28 SmartNIC port
-	
5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 *Slot 4 and Slot 5 are preinstalled with 25GbE network adapters. Please reserve these slots for the 25GbE adapters for the best performance. **Slot 2 provides the width of PCIe Gen4 x8 when Slot 3 is not in use, and provides the width of PCIe Gen4 x4 when Slot 3 is in use. ***Slot 5 provides the width of PCIe Gen4 x16 when Slot 4 is not in use, and provides the width of PCIe Gen4 x8 when Slot 4 is in use.	5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 *Slot 5 is preinstalled with a 25GbE network adapter. **Slot 2 provides the width of PCIe Gen4 x8 when Slot 3 is not in use, and provides the width of PCIe Gen4 x4 when Slot 3 is in use. ***Slot 5 provides the width of PCIe Gen4 x16 when Slot 4 is not in use, and provides the width of PCIe Gen4 x8 when Slot 4 is in use.
-	
2	
-	
-	
Rackmount	
88.3 x 480.97 x 510.23	
15.2	
0 - 35°C (32°F - 95°F)	
1100W PSU(x2), 200-240Vac, Max Wattage: 1100W@200-240Vac 850W@100-240Vac	
277.64	
4 x 60mm, 12VDC	
-	

TS-h1090FU



Model	TS-h1090FU-7302P-256G (By Request)	TS-h1090FU-7302P-128G	TS-h1090FU-7232P-64G
CPU	AMD EPYC™ 7302P 16-core/ 32-thread processor, up to 3.3 GHz	AMD EPYC™ 7302P 16-core/ 32-thread processor, up to 3.3 GHz	AMD EPYC™ 7232P/7252 8-core/ 16-thread processor, up to 3.2 GHz
CPU Architecture	64-bit x86		
Graphic Processors	-		
Floating Point Unit	-		
Encryption Engine	Yes (AES-NI)		
Hardware-accelerated Transcoding	-		
System Memory	256 GB RDIMM DDR4 ECC (8 x 32 GB)	128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
Maximum Memory	1 TB+ (12 x 128 GB)		
Memory Slot	12 x RDIMM DDR4		
Drive Bay	10 x 2.5-inch U.2 PCIe NVMe / SATA 6Gbps		
Hot-swappable	Yes		
M.2 Slot	-		
SSD Cache Acceleration Support	Yes		
Gigabit Ethernet Port (RJ45)	-		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M/10M)		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		
10 Gigabit Ethernet Port	-		
25 Gigabit Ethernet Port	2 x 25GbE SFP28 SmartNIC port		
Thunderbolt Port	-		
PCIe Slot	2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x16 For low profile PCIe cards only.		
USB 2.0 port	-		
USB 3.2 Gen 1 port	3		
USB 3.2 Gen 2 (10Gbps) port	-		
HDMI Output	-		
Form Factor	Rackmount		
Dimensions (HxWxD)	44 x 430 x 580		
Weight (Net)	10.42		
Operating Temperature	0 - 40 °C (32°F - 104°F)		
Power Supply Unit	550W PSU (x2), AC 100-240 V		
Power Consumption: Operating Mode, Typical	157.97		
Fan	5 x 60mm, 12VDC		
Kensington Security Slot	-		



TS-h1290FX



TS-h1290FX-7302P-256G (By Request)

TS-h1290FX-7302P-128G

TS-h1290FX-7232P-64G

AMD EPYC™ 7302P 16-core/
32-thread processor, up to 3.3 GHz

AMD EPYC™ 7302P 16-core/
32-thread processor, up to 3.3 GHz

AMD EPYC™ 7232P/7252 8-core/
16-thread processor, up to 3.2 GHz

64-bit x86

-

-

Yes (AES-NI)

-

256 GB RDIMM DDR4 ECC (8 x 32 GB)

128 GB RDIMM DDR4 ECC (8 x 16 GB)

64 GB RDIMM DDR4 ECC (8 x 8 GB)

1 TB (8 x 128 GB)

8 x RDIMM DDR4

12 x 2.5-inch

Yes

-

Yes

-

2 (2.5G/1G/100M/10M)

-

-

2 x 25GbE SFP28 SmartNIC port

-

4

Slot 1: PCIe Gen 4 x16

Slot 2: PCIe Gen 4 x16

Slot 3: PCIe Gen 4 x8

Slot 4: PCIe Gen 4 x16

-

3

-

-

Tower

150 x 368 x 362

8.99

0 - 40 °C (32°F - 104°F)

750W, 100-240V

134.41


2 x 92mm, 12VDC

Yes

TDS-h2489FU








Model	TDS-h2489FU-4314-1TB (By Request)	TDS-h2489FU-4314-512G (By Request)	TDS-h2489FU-4314-256G
CPU	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz
CPU Architecture	64-bit x86		
Graphic Processors	-		
Floating Point Unit	-		
Encryption Engine	Yes (AES-NI)		
Hardware-accelerated Transcoding	-		
System Memory	1 TB RDIMM DDR4 ECC (32 x 32 GB)	512 GB RDIMM DDR4 ECC (16 x 32 GB)	256 GB RDIMM DDR4 ECC (8 x 32 GB)
Maximum Memory	-		
Memory Slot	32 x RDIMM DDR4 ECC (16 x slots per socket)		
Drive Bay	24 x 2.5-inch		
Hot-swappable	Yes		
M.2 Slot	2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s		
SSD Cache Acceleration Support	Yes		
Gigabit Ethernet Port (RJ45)	-		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4 (2.5G/1G/100M/10M)		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		
10 Gigabit Ethernet Port	-		
25 Gigabit Ethernet Port	2 x 25GbE SFP28 SmartNIC port		
Thunderbolt Port	-		
PCIe Slot	2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.		
USB 2.0 port	-		
USB 3.2 Gen 1 port	4		
USB 3.2 Gen 2 (10Gbps) port	-		
HDMI Output	-		
Form Factor	Rackmount		
Dimensions (HxWxD)	88.3 x 446.2 x 713.2		
Weight (Net)	21.31		
Operating Temperature	0 - 35°C (32°F - 95°F)		
Power Supply Unit	1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac		
Power Consumption: Operating Mode, Typical	467.59		
Fan	6 x 60mm, 12VDC		
Kensington Security Slot	-		



TDS-h2489FU



TDS-h2489FU-4314-128G	TDS-h2489FU-4309Y-64G
2 x Intel® Xeon® Silver 4314 16-core/32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4309Y 8-core/16-thread processor, up to 3.6 GHz
64-bit x86	
-	
-	
Yes (AES-NI)	
-	
128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
-	
32 x RDIMM DDR4 ECC (16 x slots per socket)	
24 x 2.5-inch	
Yes	
2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s	
Yes	
-	
4 (2.5G/1G/100M/10M)	
-	
-	
2 x 25GbE SFP28 SmartNIC port	
-	
2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.	
-	
4	
-	
-	
Rackmount	
88.3 x 446.2 x 713.2	
21.31	
0 - 35°C (32°F - 95°F)	
1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac	
467.59	
6 x 60mm, 12VDC	
-	









QTS hero



High-performance
ZFS-based OS
with greater reliability






	TS-h3088XU-RP		TS-h2490FU	
				
Model	TS-h3088XU-RP-W1270-64G	TS-h3088XU-RP-W1250-32G	TS-h2490FU-7302P-128G	TS-h2490FU-7232P-64G
CPU	Intel® Xeon® W-1270 8-core/ 16-thread processor, up to 5.0 GHz		AMD EPYC™ 7302P 16-core/ 32-thread processor, up to 3.3 GHz	
CPU Architecture	64-bit x86		64-bit x86	
Graphic Processors	-		-	
Floating Point Unit	Yes		-	
Encryption Engine	Yes (AES-NI)		Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes		-	
System Memory	64 GB UDIMM DDR4 ECC (4 x 16 GB)	32 GB UDIMM DDR4 ECC (2 x 16 GB)	128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
Maximum Memory	128 GB (4 x 32 GB)		4 TB (16 x 256 GB)	
Memory Slot	4 x Long-DIMM DDR4.		16 x Long-DIMM DDR4	
Drive Bay	Front: 24 x 2.5-inch SATA 6Gb/s, 3Gb/s Rear: 6 x 2.5-inch SATA 6Gb/s, 3Gb/s		24 x 2.5-inch U.2 PCIe NVMe	
Hot-swappable	Yes		Yes	
M.2 Slot	-		-	
SSD Cache Acceleration Support	Yes		Yes	
Gigabit Ethernet Port (RJ45)	-		-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4		2 (also support 10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via an adapter		-	
10 Gigabit Ethernet Port	Optional via an adapter		-	
25 Gigabit Ethernet Port	2		4 x 25GbE SFP28 SmartNIC port	2 x 25GbE SFP28 SmartNIC port
Thunderbolt Port	-		-	
PCIe Slot	3 Slot 1: PCIe Gen3 x8 or x4 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 25GbE network adapter. Please reserve this slot for the 25GbE adapter for the best performance. **Slot 1 provides the width of PCIe Gen3 x8 when Slot 2 is not in use, and provides the width of PCIe Gen3 x4 when Slot 2 is in use.		5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 *Slot 4 and Slot 5 are preinstalled with 25GbE network adapters. Please reserve these slots for the 25GbE adapters for the best performance. **Slot 2 provides the width of PCIe Gen4 x8 when Slot 3 is not in use, and provides the width of PCIe Gen4 x4 when Slot 3 is in use. ***Slot 5 provides the width of PCIe Gen4 x16 when Slot 4 is not in use, and provides the width of PCIe Gen4 x8 when Slot 4 is in use.	
USB 2.0 port	-		-	
USB 3.2 Gen 1 port	-		2	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps		-	
HDMI Output	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)		-	
Form Factor	Rackmount		Rackmount	
Dimensions (HxWxD)	88.3 x 481.07 x 515.02		88.3 x 480.97 x 510.23	
Weight (Net)	12.26		15.2	
Operating temperature	0 - 40°C (32°F - 104°F)		0 - 35°C (32°F - 95°F)	
Power Supply Unit	550W(x2), 100-240V		1100W PSU(x2), 200-240Vac, Max Wattage:1100W@200-240Vac 850W@100-240Vac	
Power Consumption: Operating Mode, Typical	261.81		277.64	
Fan	3 x 60mm, 12VDC		4 x 60mm, 12VDC	
Kensington Security Slot	-		-	





	TS-h686	TS-h886
		
	TS-h686-D1602-8G	TS-h886-D1622-16G
	Intel® Xeon® D-1602 2-core/4-thread processor, up to 3.2 GHz	Intel® Xeon® D-1622 4-core/8-thread processor, up to 3.2 GHz
	64-bit x86	64-bit x86
	-	-
	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)
	Yes	Yes
	8 GB UDIMM DDR4 ECC (2 x 4 GB)	16 GB UDIMM DDR4 ECC (2 x 8 GB)
	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)
	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
	4 x 3.5-inch SATA 6Gb/s, 3Gb/s + 2 x 2.5-inch SATA 6Gb/s, 3Gb/s	6 x 3.5-inch SATA 6Gb/s, 3Gb/s + 2 x 2.5-inch SATA 6Gb/s, 3Gb/s
	Yes	Yes
	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots
	Yes	Yes
	-	-
	4 (also support 10M)	4 (also support 10M)
	Optional via an adapter	Optional via an adapter
	-	-
	Optional via an adapter	Optional via an adapter
	-	-
	2 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x8	2 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x8
	-	-
	3	3
	-	-
	-	-
	Tower	Tower
	231.9 x 224.9 x 319.8	231.9 x 292.9 x 319.8
	7.27	8.5
	0 - 40°C (32°F - 104°F)	0 - 40°C (32°F - 104°F)
	250W PSU, 100~240V	250W PSU, 100~240V
	61.115	75.79
	System fan: 1 x 97mm, 12VDC CPU fan: 1 x 90mm, 12VDC	System fan: 2 x 80mm, 12VDC CPU fan: 1 x 90mm, 12VDC
	Yes	Yes



	TVS-h1288X	TVS-h1688X
		
Model	TVS-h1288X-W1250-16G	TVS-h1688X-W1250-32G
CPU	Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz	Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz
CPU Architecture	64-bit x86	64-bit x86
Graphic Processors	Intel® UHD Graphics P630	Intel® UHD Graphics P630
Floating Point Unit	Yes	Yes
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)
Hardware-accelerated Transcoding	Yes	Yes
System Memory	16 GB ECC UDIMM DDR4 (2 x 8 GB)	32GB ECC UDIMM DDR4 (2 x 16 GB)
Maximum Memory	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
Drive Bay	8 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s	12 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes	Yes
M.2 Slot	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots
SSD Cache Acceleration Support	Yes	Yes
Gigabit Ethernet Port (RJ45)	-	-
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4 (also support 10M)	4 (also support 10M)
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via an adapter	Optional via an adapter
10 Gigabit Ethernet Port	2 x 10GBASE-T (10G/1G)	2 x 10GBASE-T (10G/1G)
25 Gigabit Ethernet Port	Optional via an adapter	Optional via an adapter
Thunderbolt Port	Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter	Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter
PCIe Slot	3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 2-port 10GbE network adapter.	3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 2-port 10GbE network adapter.
USB 2.0 port	-	-
USB 3.2 Gen 1 port	-	-
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C 3 x Type-A	2 x Type-C 4 x Type-A
HDMI Output	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)
Form Factor	Tower	Tower
Dimensions (HxWxD)	234.6 x 369.9 x 319.8	303.84 x 369.89 x 319.8
Weight (Net)	11.27	13.41
Operating temperature	0 - 40°C (32°F - 104°F)	0 - 40°C (32°F - 104°F)
Power Supply Unit	550W PSU, 100~240V	550W PSU, 100~240V
Power Consumption: Operating Mode, Typical	97.492	108.67
Fan	System fan: 3 x 80mm, 12VDC CPU fan: 2 x 97mm, 12VDC	System fan: 3 x 80mm, 12VDC CPU fan: 2 x 97mm, 12VDC
Kensington Security Slot	Yes	Yes





TS-h1283XU-RP		TS-h1683XU-RP	TS-h2483XU-RP
			
TS-h1283XU-RP-E2236-128G	TS-h1283XU-RP-E2236-32G	TS-h1683XU-RP-E2236-128G	TS-h2483XU-RP-E2236-128G
Intel® Xeon® E-2236 6-core/12-thread 3.4 GHz processor, up to 4.8 GHz		Intel® Xeon® E-2236 6-core 3.4 GHz processor (burst up to 4.8 GHz)	
64-bit x86		64-bit x86	
-		-	
Yes		Yes	
Yes (AES-NI)		Yes (AES-NI)	
-		-	
128 GB UDIMM DDR4 ECC (4 x 32GB)	32 GB UDIMM DDR4 ECC (2 x 16GB)	128 GB UDIMM DDR4 ECC (4 x 32GB)	
128 GB (4 x 32 GB)		128 GB (4 x 32 GB)	
4 x Long-DIMM DDR4		4 x Long-DIMM DDR4	
12 x 3.5-inch SATA 6Gb/s, 3Gb/s		16 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Yes		Yes	
-		-	
Yes		Yes	
4		4	
-		-	
-		-	
2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port		2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port	
-		-	
-		-	
4 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x8 (CPU) Slot 3: PCIe Gen 3 x4 (CPU) Slot 4: PCIe Gen 3 x4 (CPU) Slot 3 and slot 4 are preinstalled with 10GbE network adapters		4 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x8 (CPU) Slot 3: PCIe Gen 3 x4 (CPU) Slot 4: PCIe Gen 3 x4 (CPU) Slot 2 and slot 4 are preinstalled with 10GbE network adapters.	
-		-	
-		-	
2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps		2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps	
-		-	
2U Rackmount		3U Rackmount	
88.3 x 482 x 562		130 x 481 x 573.5	
11.75		13.76	
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)	
500W(x2), 100-240V		500W(x2), 100-240V	
105.12		149	
System fan: 2 x 60mm, 12VDC		System fan: 4 x 92mm, 12VDC	
-		-	



	TS-h977XU-RP	TS-h1277XU-RP	
			
Model	TS-h977XU-RP-3700X-32G	TS-h1277XU-RP-3700X-128G	TS-h1277XU-RP-3700X-32G
CPU	AMD Ryzen™ 7 3700X 8-core/16-thread processor, burst up to 4.4 GHz		AMD Ryzen™ 7 3700X 8-core/16-thread processor, burst up to 4.4 GHz
CPU Architecture	64-bit x86		64-bit x86
Graphic Processors	-		-
Floating Point Unit	-		Yes
Encryption Engine	Yes (AES-NI)		Yes (AES-NI)
Hardware-accelerated Transcoding	-		-
System Memory	32 GB UDIMM DDR4 (2 x 16GB)	128 GB UDIMM DDR4 (4 x 32GB)	32 GB UDIMM DDR4 (2 x 16GB)
Maximum Memory	128 GB (4 x 32 GB)		128 GB (4 x 32 GB)
Memory Slot	4 x Long-DIMM DDR4		4 x Long-DIMM DDR4
Drive Bay	4 x 3.5-inch + 5 x 2.5-inch SATA 6Gb/s, 3Gb/s		12 x 3.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes		Yes
M.2 Slot	-		-
SSD Cache Acceleration Support	Yes		Yes
Gigabit Ethernet Port (RJ45)	2		2
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-		-
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		-
10 Gigabit Ethernet Port	2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port		2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port
25 Gigabit Ethernet Port	-		-
Thunderbolt Port	-		-
PCIe Slot	1 Slot 1: PCIe Gen 3 x16 PCIe slot is preinstalled with a 10GbE network adapter		4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4* Slot 3: PCIe Gen 3 x4 Slot 4: PCIe Gen 3 x8 or PCIe Gen 3 x4** *Slot 2 provides the width of PCIe Gen.3 x8 when Slot 1 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 1 is in use. **Slot 3 provides the width of PCIe Gen.3 x8 when Slot 4 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 4 is in use. ***PCIe slot 4 is preinstalled with a 10GbE network adapter
USB 2.0 port	-		-
USB 3.2 Gen 1 port	4		4
USB 3.2 Gen 2 (10Gbps) Port	1 x Type-A USB 3.2 Gen 2 10Gbps		1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps
HDMI Output	-		-
Form Factor	1U Rackmount		2U Rackmount
Dimensions (HxWxD)	43.3 x 482.6 x 505.54		88.3 x 482 x 562
Weight (Net)	8.62		13.73
Operating temperature	0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)
Power Supply Unit	300W(x2), 100-240V		300W (x2), 100-240V
Power Consumption: Operating Mode, Typical	76.43		106.66
Fan	System fan: 3 x 40mm, 12VDC		System fan: 2 x 70mm, 12VDC
Kensington Security Slot	-		-




TS-h1677XU-RP	TS-h2477XU-RP
	
TS-h1677XU-RP-3700X-32G	TS-h2477XU-RP-3700X-32G
AMD Ryzen™ 7 3700X 8-core/16-thread processor, burst up to 4.4 GHz	AMD Ryzen™ 7 3700X 8-core/16-thread processor, burst up to 4.4 GHz
64-bit x86	64-bit x86
-	-
Yes	Yes
Yes (AES-NI)	Yes (AES-NI)
-	-
32 GB UDIMM DDR4 (2 x 16GB)	32 GB UDIMM DDR4 (2 x 16GB)
128 GB (4 x 32 GB)	128 GB (4 x 32 GB)
4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
16 x 3.5-inch SATA 6Gb/s, 3Gb/s	24 x 3.5-inch SATA 6Gb/s, 3Gb/s
Yes	Yes
-	-
Yes	Yes
2	2
-	-
-	-
2 x 10GbE SFP+ SmartNIC port	2 x 10GbE SFP+ SmartNIC port
-	-
-	-
4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4* Slot 3: PCIe Gen 3 x4 Slot 4: PCIe Gen 3 x8 or PCIe Gen 3 x4** *Slot 2 provides the width of PCIe Gen.3 x8 when Slot 1 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 1 is in use. **Slot 3 provides the width of PCIe Gen.3 x8 when Slot 4 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 4 is in use.	4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4* Slot 3: PCIe Gen 3 x8 or PCIe Gen 3 x4** Slot 4: PCIe Gen 3 x4 *Slot 2 provides the width of PCIe Gen.3 x8 when Slot 1 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 1 is in use. **Slot 3 provides the width of PCIe Gen.3 x8 when Slot 4 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 4 is in use. ***PCIe slot 4 is preinstalled with a 10GbE network adapter
-	-
4	4
1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps	1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps
-	-
3U Rackmount	4U Rackmount
130 x 481 x 573.5	176.15 x 481.04 x 672.02
15.26	22.66
0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
500W(x2), 100-240V	800W(x2), 100-240V
136.45	143.97
System fan: 4 x 92mm, 12VDC	System fan: 4 x 92mm, 12VDC
-	-

	TS-473A	TS-673A
		
Model	TS-473A-8G	TS-673A-8G
CPU	AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor
CPU Architecture	64-bit x86	64-bit x86
Graphic Processors	Optional via a PCIe adapter	Optional via a PCIe adapter
Floating Point Unit	Yes	Yes
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)
Hardware-accelerated Transcoding	Optional via a PCIe adapter	Optional via a PCIe adapter
System Memory	8 GB SO-DIMM DDR4 (1 x 8 GB)	8 GB SO-DIMM DDR4 (1 x 8 GB)
Maximum Memory	64 GB (2 x 32 GB)	64 GB (2 x 32 GB)
Memory Slot	2 x SO-DIMM DDR4 Support ECC memory	2 x SO-DIMM DDR4 Support ECC memory
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s	6 x 3.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.	Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.
M.2 Slot	2 x M.2 2280 PCIe Gen3 x1 slots The M.2 SSD is not included as standard. M.2 SSD operations can easily generate excessive heat. It is recommended to install a heatsink (from [QNAP] (http://shop.qnap.com/index.php?route=product/product&product_id=168) or a third-party provider) on the M.2 SSD.	2 x M.2 2280 PCIe Gen3 x1 slots The M.2 SSD is not included as standard. M.2 SSD operations can easily generate excessive heat. It is recommended to install a heatsink (from [QNAP] (http://shop.qnap.com/index.php?route=product/product&product_id=168) or a third-party provider) on the M.2 SSD.
SSD Cache Acceleration Support	Yes	Yes
Gigabit Ethernet Port (RJ45)	-	-
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2	2
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via a PCIe adapter	Optional via a PCIe adapter
10 Gigabit Ethernet Port	Optional via a PCIe adapter	Optional via a PCIe adapter
25 Gigabit Ethernet Port	-	-
Thunderbolt Port	-	-
PCIe Slot	2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4	2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4
USB 2.0 port	-	-
USB 3.2 Gen 1 port	-	-
USB 3.2 Gen 2 (10Gbps) Port	3 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps 1 x Type-C USB 3.2 Gen 1 5V/1A 5Gbps	3 x Type-A USB 3.2 Gen 2 10Gbps 1 x Type-C USB 3.2 Gen 1 5Gbps
HDMI Output	Optional via a PCIe adapter	Optional via a PCIe adapter
Form Factor	Tower	Tower
Dimensions (HxWxD)	188.2 x 199.3 x 280.8	188.2 x 264.3 x 280.8
Weight (Net)	5.03	5.78
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	250W, 100-240V AC, 50-60Hz, 3.5A	250W, 100-240V AC, 50-60Hz, 3.5A
Power Consumption: Operating Mode, Typical	29.792	45.898
Fan	System fan: 1 x 120mm CPU fan: 1 x 60mm	System fan: 2 x 92mm CPU fan: 1 x 60mm
Kensington Security Slot	-	Yes



TS-873A		TS-h973AX	
			
TS-873A-8G		TS-h973AX-32G	TS-h973AX-8G
AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor		AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	
64-bit x86		64-bit x86	
Optional via a PCIe adapter		-	
Yes		Yes	
Yes (AES-NI)		Yes (AES-NI)	
Optional via a PCIe adapter		-	
8 GB SO-DIMM DDR4 (1 x 8 GB)		32 GB SO-DIMM DDR4 (2 x 16 GB)	8 GB SO-DIMM DDR4 (1 x 8 GB)
64 GB (2 x 32 GB)		64 GB (2 x 32 GB)	
2 x SO-DIMM DDR4 Support ECC memory		2 x SO-DIMM DDR4 Support optional ECC memory	
8 x 3.5-inch SATA 6Gb/s, 3Gb/s		5 x 3.5-inch + 4 x 2.5-inch	
Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.		Yes	
2 x M.2 2280 PCIe Gen3 x1 slots The M.2 SSD is not included as standard. M.2 SSD operations can easily generate excessive heat. It is recommended to install a heatsink (from [QNAP](http://shop.qnap.com/index.php?route=product/product&product_id=168) or a third-party provider) on the M.2 SSD.		-	
Yes		Yes	
-		-	
2		2	
Optional via a PCIe adapter		Optional via the QNA-UC5G1T USB to 5GbE network adapter	
Optional via a PCIe adapter		1 x 10GBASE-T (10G/5G/2.5G/1G/100M)	
-		-	
-		-	
2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4		-	
-		-	
-		-	
3 x Type-A USB 3.2 Gen 2 10Gbps 1 x Type-C USB 3.2 Gen 1 5Gbps		1 x Type-C USB 3.2 Gen 2 3 x Type-A USB 3.2 Gen 2	
Optional via a PCIe adapter		-	
Tower		Tower	
188.2 x 329.3 x 280.8		182.65 x 224.6 x 224.1	
6.76		3.52	
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)	
250W, 100-240V AC, 50-60Hz, 3.5A		External, 120 W, AC 100 to 240 V	
54.067		55.41	
System fan: 2 x 120mm CPU fan: 1 x 60mm		1 x 140mm, 12VDC	
Yes		Yes	



	TDS-h2489FU			
				
Model	TDS-h2489FU-4314-512G (By Request)	TDS-h2489FU-4314-256G	TDS-h2489FU-4314-128G	
CPU	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	
CPU Architecture	64-bit x86			
Graphic Processors	-			
Floating Point Unit	-			
Encryption Engine	Yes (AES-NI)			
Hardware-accelerated Transcoding	-			
System Memory	1 TB RDIMM DDR4 ECC (32 x 32 GB)	512 GB RDIMM DDR4 ECC (16 x 32 GB)	256 GB RDIMM DDR4 ECC (8 x 32 GB)	
Maximum Memory	-			
Memory Slot	32 x RDIMM DDR4 ECC (16 x slots per socket)			
Drive Bay	24 x 2.5-inch			
Hot-swappable	Yes			
M.2 Slot	2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s			
SSD Cache Acceleration Support	Yes			
Gigabit Ethernet Port (RJ45)	-			
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4 (2.5G/1G/100M/10M)			
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-			
10 Gigabit Ethernet Port	-			
25 Gigabit Ethernet Port	2 x 25GbE SFP28 SmartNIC port			
Thunderbolt Port	-			
PCIe Slot	2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.			
USB 2.0 port	-			
USB 3.2 Gen 1 port	4			
USB 3.2 Gen 2 (10Gbps) port	-			
HDMI Output	-			
Form Factor	Rackmount			
Dimensions (HxWxD)	88.3 x 446.2 x 713.2			
Weight (Net)	21.31			
Operating Temperature	0 - 35°C (32°F - 95°F)			
Power Supply Unit	1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac			
Power Consumption: Operating Mode, Typical	467.59			
Fan	6 x 60mm, 12VDC			
Kensington Security Slot	-			






TDS-h2489FU




TDS-h2489FU-4314-128G	TDS-h2489FU-4309Y-64G
2 x Intel® Xeon® Silver 4314 16-core/32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4309Y 8-core/16-thread processor, up to 3.6 GHz
64-bit x86	
-	
-	
Yes (AES-NI)	
-	
128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
-	
32 x RDIMM DDR4 ECC (16 x slots per socket)	
24 x 2.5-inch	
Yes	
2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s	
Yes	
-	
4 (2.5G/1G/100M/10M)	
-	
-	
2 x 25GbE SFP28 SmartNIC port	
-	
2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.	
-	
4	
-	
-	
Rackmount	
88.3 x 446.2 x 713.2	
21.31	
0 - 35°C (32°F - 95°F)	
1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac	
467.59	
6 x 60mm, 12VDC	
-	



	TVS-h474	TVS-h674	
			
Model	TVS-h474-PT-8G	TVS-h674-i5-32G	TVS-h674-i3-16G
CPU	Intel® Pentium® Gold G7400 2-core/ 4-thread 3.7 GHz Processor	Intel® Core™ i5-12400 6-core/ 12-thread Processor, burst up to 4.4 GHz	Intel® Core™ i3-12100 4-core/ 8-thread Processor, burst up to 4.3 GHz
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	Intel® UHD Graphics 710	Intel® UHD Graphics 770	Intel® UHD Graphics 730
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	Yes	
System Memory	8 GB SODIMM DDR4 (1 x 8 GB)	32 GB SODIMM DDR4 (2 x 16 GB)	16 GB SODIMM DDR4 (1 x 16 GB)
Maximum Memory	128 GB (2 x 64 GB)	128 GB (2 x 64 GB)	
Memory Slot	2 x SODIMM DDR4	2 x SODIMM DDR4	
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s	6 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 Slot	2 x M.2 2280 PCIe Gen3 x2 slots	2 x M.2 2280 PCIe Gen4 x4 slots	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)			
10 Gigabit Ethernet Port	-	-	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 3 x2	2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 4 x4 (PCH)	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	-	-	
USB 3.2 Gen 2 (10Gbps) Port	1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	
HDMI Output	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	
Form Factor	Tower	Tower	
Dimensions (HxWxD)	188.2 × 199.3 × 279.6	188.2 x 264.3 x 279.6	
Weight (Net)	5.33	6.553	
Operating Temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W, 100-240V	250W, 100-240V	
Power Consumption: Operating Mode, Typical	45.6	45.6	
Fan	System fan: 1 x 120mm, 12VDC CPU fan: 1 x 60mm, 12VDC	System fan: 2 x 92mm, 12VDC CPU fan: 1 x 60mm, 12VDC	
Kensington Security Slot	Yes	Yes	





TVS-h874	TS-h1886XU-RP R2	TS-h987XU-RP
		
TVS-h874-i5-32G	TS-h1886XU-RP-R2-D1622-32G	TS-h987XU-RP-E2334-16G
Intel® Core™ i5-12400 6-core/ 12-thread Processor, burst up to 4.4 GHz	Intel® Xeon® D-1622 4-core processor, burst up to 3.2 GHz	Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz
64-bit x86	64-bit x86	64-bit x86
Intel® UHD Graphics 770	-	-
Yes	Yes	Yes
Yes (AES-NI)	Yes (AES-NI)	Yes (AES-NI)
Yes	-	-
32 GB SODIMM DDR4 (2 x 16 GB)	32 GB UDIMM DDR4 ECC (2 x 16GB)	16 GB ECC DDR4 (1 x 16 GB)
128 GB (2 x 64 GB)	128 GB (4 x 32 GB)	128GB (4 x 32 GB)
2 x SODIMM DDR4	4 x UDIMM DDR4	4 x Long-DIMM DDR4
8 x 3.5-inch SATA 6Gb/s, 3Gb/s	Front: 12 x 3.5-inch SATA 6Gb/s, 3Gb/s Rear: 6 x 2.5-inch SATA 6Gb/s, 3Gb/s	9 (4 x 3.5-inch SATA + 5 x 2.5-inch U.2 PCIe / SATA) 2.5-inch bays: #1: PCIe Gen3 x2 & SATA 6Gbps #2: PCIe Gen3 x2 & SATA 6Gbps #3: PCIe Gen3 x2 & SATA 6Gbps #4: PCIe Gen4 x4 & SATA 6Gbps #5: PCIe Gen4 x4 & SATA 6Gbps
Yes	Yes	-
2 x M.2 2280 PCIe Gen4 x4 slots	-	Optional via a QM2 PCIe adapter
Yes	Yes	Yes
-	-	-
2 (2.5G/1G/100M/10M)	4 (2.5G/1G/100M)	2 (2.5G/1G/100M)
-	2 x 10GbE SFP+ SmartNIC port Pre-installed with a 10GbE PCIe adapter	2 x 10GBASE-T (10G/5G/2.5G/1G/100M)
-	-	-
-	-	-
2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 4 x4 (PCH)	3 Slot 1: PCIe Gen 2 x4 (x8 Slot) Slot 2: PCIe Gen 3 x4 Slot 3: PCIe Gen 3 x8 or x4 (x8 Slot) *Slot 3 is preinstalled with a 10GbE network adapter. **Slot 3 provides the width of PCIe Gen 3 x8 when Slot 2 is not in use, and provides the width of PCIe Gen 3 x4 when Slot 2 is in use.	1 x Gen4 x8
-	-	-
-	2	-
1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	-	4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps
1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	-	-
Tower	Rackmount	1U Rackmount
188.2 x 329.3 x 279.6	88.3 x 482 x 549.7	43.3 x 430 x 479
7.06	12.73	8.43
0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
250W, 100-240V	550W(x2), 100-240V	-
65.03	117.92	-
System fan: 2 x 120mm, 12VDC CPU fan: 1 x 60mm, 12VDC	System fan: 3 x 60mm, 12VDC	4 x 40mm, 12VDC
Yes	-	-

	TS-h1887XU-RP	
		
Model	TS-h1887XU-RP-E2334-16G	TS-h1887XU-RP-E2336-32G
CPU	Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz	Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz
CPU Architecture	64-bit x86	
Graphic Processors	-	
Floating Point Unit	Yes	
Encryption Engine	Yes (AES-NI)	
Hardware-accelerated Transcoding	-	
System Memory	16 GB ECC DDR4 (1 x 16 GB)	32 GB ECC DDR4 (2 x 16 GB)
Maximum Memory	128GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	
Drive Bay	18 (12 x 3.5-inch SATA + 6 x 2.5-inch SATA)	
Hot-swappable	-	
M.2 Slot	Optional via a QM2 PCIe adapter	
SSD Cache Acceleration Support	Yes	
Gigabit Ethernet Port (RJ45)	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)		
10 Gigabit Ethernet Port	2 x 10GBASE-T (10G/5G/2.5G/1G/100M)	
25 Gigabit Ethernet Port	-	
Thunderbolt Port	-	
PCIe Slot	3 (2 x Gen4 x4 + 1 x Gen 4 x8)	
USB 2.0 port	-	
USB 3.2 Gen 1 port	-	
USB 3.2 Gen 2 (10Gbps) port	4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps	
HDMI Output	-	
Form Factor	2U Rackmount	
Dimensions (HxWxD)	88 x 483 x 630	
Weight (Net)	13	
Operating Temperature	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	-	
Power Consumption: Operating Mode, Typical	-	
Fan	4 x 60mm, 12VDC	
Kensington Security Slot	-	



TS-h2287XU-RP		TS-h3087XU-RP
		
TS-h2287XU-RP-E2336-32G	TS-h2287XU-RP-E2378-64G	TS-h3087XU-RP-E2378-64G
Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz	Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz	Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz
64-bit x86		64-bit x86
-		-
Yes		Yes
Yes (AES-NI)		Yes (AES-NI)
-		-
32 GB ECC DDR4 (2 x 16 GB)	64 GB ECC DDR4 (4 x 16 GB)	64 GB ECC DDR4 (4 x 16 GB)
128GB (4 x 32 GB)		128GB (4 x 32 GB)
4 x Long-DIMM DDR4		4 x Long-DIMM DDR4
22 (16 x 3.5-inch SATA + 6 x 2.5-inch SATA)		30 (24 x 3.5-inch SATA + 6 x 2.5-inch SATA)
-		-
Optional via a QM2 PCIe adapter		Optional via a QM2 PCIe adapter
Yes		Yes
-		-
2 (2.5G/1G/100M)		2 (2.5G/1G/100M)
2 x 10GBASE-T (10G/5G/2,5G/1G/100M)		2 x 10GBASE-T (10G/5G/2,5G/1G/100M)
-		-
-		-
3 (2 x Gen4 x4 + 1 x Gen 4 x8)		3 (2 x Gen4 x4 + 1 x Gen 4 x8)
-		-
-		-
4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps		4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps
-		-
3U Rackmount		4U Rackmount
133 x 483 x 630		178 x 483 x 630
15.64		21.78
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)
-		-
-		-
3 x 60mm + 1 x 80mm, 12VDC		4 x 80mm, 12VDC
-		-

	TS-1273AU-RP	TS-1673AU-RP
		
Model	TS-1273AU-RP-8G	TS-1673AU-RP-16G
CPU	AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor
CPU Architecture	64-bit x86	64-bit x86
Graphic Processors	-	-
Floating Point Unit	Yes	Yes
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)
Hardware-accelerated Transcoding	Optional via a PCIe graphics card	Optional via a PCIe graphics card
System Memory	8 GB UDIMM DDR4 (1 x 8 GB)	16 GB UDIMM DDR4 (1 x 16 GB)
Maximum Memory	64 GB (2 x 32 GB)	64 GB (2 x 32 GB)
Memory Slot	2 x Long-DIMM DDR4 Support ECC memory	2 x Long-DIMM DDR4 Support ECC memory
Drive Bay	12 x 3.5-inch SATA 6Gb/s, 3Gb/s	16 x 3.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes	Yes
M.2 Slot	Optional via a QNAP QM2 PCIe card	Optional via a QNAP QM2 PCIe card
SSD Cache Acceleration Support	Yes	Yes
Gigabit Ethernet Port (RJ45)	-	-
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (also support 10M)	2 (also support 10M)
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via a network adapter	Optional via a network adapter
10 Gigabit Ethernet Port	Optional via a network adapter	Optional via a network adapter
25 Gigabit Ethernet Port	-	-
Thunderbolt Port	-	-
PCIe Slot	2 x PCIe Gen3 x4	2 x PCIe Gen3 x4
USB 2.0 port	-	-
USB 3.2 Gen 1 port	1 x Type-A	1 x Type-A
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C 1 x Type-A	2 x Type-C 1 x Type-A
HDMI Output	Optional via a PCIe graphics card	Optional via a PCIe graphics card
Form Factor	2U Rackmount	3U Rackmount
Dimensions (HxWxD)	89 x 482 x 425	132 x 482 x 425
Weight (Net)	9.69	12
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	300W (x2) PSU, 100 - 240V	550W (x2), 100-240V AC, 50-60Hz, 7-3.5A
Power Consumption: Operating Mode, Typical	78.92	97.34
Fan	2 x 80mm, 12VDC	3 x 80mm, 12VDC
Kensington Security Slot	-	-



100GbE Solution

Ultra-high-speed
100GbE networking
with low latency



TS-h1090FU



Model	TS-h1090FU-7302P-256G (By Request)	TS-h1090FU-7302P-128G	TS-h1090FU-7232P-64G
CPU	AMD EPYC™ 7302P 16-core/ 32-thread processor, up to 3.3 GHz	AMD EPYC™ 7302P 16-core/ 32-thread processor, up to 3.3 GHz	AMD EPYC™ 7232P/7252 8-core/ 16-thread processor, up to 3.2 GHz
CPU Architecture	64-bit x86		
Graphic Processors	-		
Floating Point Unit	-		
Encryption Engine	Yes (AES-NI)		
Hardware-accelerated Transcoding	-		
System Memory	256 GB RDIMM DDR4 ECC (8 x 32 GB)	128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
Maximum Memory	1 TB+ (12 x 128 GB)		
Memory Slot	12 x RDIMM DDR4		
Drive Bay	10 x 2.5-inch U.2 PCIe NVMe / SATA 6Gbps		
Hot-swappable	Yes		
M.2 Slot	-		
SSD Cache Acceleration Support	Yes		
Gigabit Ethernet Port (RJ45)	-		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M/10M)		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		
10 Gigabit Ethernet Port	-		
25 Gigabit Ethernet Port	2 x 25GbE SFP28 SmartNIC port		
Thunderbolt Port	-		
PCIe Slot	2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x16 For low profile PCIe cards only.		
USB 2.0 port	-		
USB 3.2 Gen 1 port	3		
USB 3.2 Gen 2 (10Gbps) port	-		
HDMI Output	-		
Form Factor	Rackmount		
Dimensions (HxWxD)	44 x 430 x 580		
Weight (Net)	10.42		
Operating Temperature	0 - 40 °C (32°F - 104°F)		
Power Supply Unit	550W PSU (x2), AC 100-240 V		
Power Consumption: Operating Mode, Typical	157.97		
Fan	5 x 60mm, 12VDC		
Kensington Security Slot	-		



TS-h1290FX




TS-h1290FX-7302P-256G (By Request)	TS-h1290FX-7302P-128G	TS-h1290FX-7232P-64G
AMD EPYC™ 7302P 16-core/ 32-thread processor, up to 3.3 GHz	AMD EPYC™ 7302P 16-core/ 32-thread processor, up to 3.3 GHz	AMD EPYC™ 7232P/7252 8-core/ 16-thread processor, up to 3.2 GHz
64-bit x86		
-		
-		
Yes (AES-NI)		
-		
256 GB RDIMM DDR4 ECC (8 x 32 GB)	128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
1 TB (8 x 128 GB)		
8 x RDIMM DDR4		
12 x 2.5-inch		
Yes		
-		
Yes		
-		
2 (2.5G/1G/100M/10M)		
-		
-		
2 x 25GbE SFP28 SmartNIC port		
-		
4 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x16 Slot 3: PCIe Gen 4 x8 Slot 4: PCIe Gen 4 x16		
-		
3		
-		
-		
Tower		
150 x 368 x 362		
8.99		
0 - 40 °C (32°F - 104°F)		
750W, 100-240V		
134.41		
2 x 92mm, 12VDC		
Yes		

TDS-h2489FU



Model	TDS-h2489FU-4314-1TB (By Request)	TDS-h2489FU-4314-512G (By Request)	TDS-h2489FU-4314-256G
CPU	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz
CPU Architecture	64-bit x86		
Graphic Processors	-		
Floating Point Unit	-		
Encryption Engine	Yes (AES-NI)		
Hardware-accelerated Transcoding	-		
System Memory	1 TB RDIMM DDR4 ECC (32 x 32 GB)	512 GB RDIMM DDR4 ECC (16 x 32 GB)	256 GB RDIMM DDR4 ECC (8 x 32 GB)
Maximum Memory	-		
Memory Slot	32 x RDIMM DDR4 ECC (16 x slots per socket)		
Drive Bay	24 x 2.5-inch		
Hot-swappable	Yes		
M.2 Slot	2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s		
SSD Cache Acceleration Support	Yes		
Gigabit Ethernet Port (RJ45)	-		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4 (2.5G/1G/100M/10M)		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		
10 Gigabit Ethernet Port	-		
25 Gigabit Ethernet Port	2 x 25GbE SFP28 SmartNIC port		
Thunderbolt Port	-		
PCIe Slot	2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.		
USB 2.0 port	-		
USB 3.2 Gen 1 port	4		
USB 3.2 Gen 2 (10Gbps) port	-		
HDMI Output	-		
Form Factor	Rackmount		
Dimensions (HxWxD)	88.3 x 446.2 x 713.2		
Weight (Net)	21.31		
Operating Temperature	0 - 35°C (32°F - 95°F)		
Power Supply Unit	1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac		
Power Consumption: Operating Mode, Typical	467.59		
Fan	6 x 60mm, 12VDC		
Kensington Security Slot	-		



TDS-h2489FU











TDS-h2489FU-4314-128G	TDS-h2489FU-4309Y-64G
2 x Intel® Xeon® Silver 4314 16-core/32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4309Y 8-core/16-thread processor, up to 3.6 GHz
64-bit x86	
-	
-	
Yes (AES-NI)	
-	
128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
-	
32 x RDIMM DDR4 ECC (16 x slots per socket)	
24 x 2.5-inch	
Yes	
2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s	
Yes	
-	
4 (2.5G/1G/100M/10M)	
-	
-	
2 x 25GbE SFP28 SmartNIC port	
-	
2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.	
-	
4	
-	
-	
Rackmount	
88.3 x 446.2 x 713.2	
21.31	
0 - 35°C (32°F - 95°F)	
1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac	
467.59	
6 x 60mm, 12VDC	
-	

TS-h2490FU



Model	TS-h2490FU-7302P-128G	TS-h2490FU-7232P-64G
CPU	AMD EPYC™ 7302P 16-core/32-thread processor, up to 3.3 GHz	AMD EPYC™ 7232P 8-core/16-thread processor, up to 3.2 GHz
CPU Architecture	64-bit x86	
Graphic Processors	-	
Floating Point Unit	-	
Encryption Engine	Yes (AES-NI)	
Hardware-accelerated Transcoding	-	
System Memory	128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
Maximum Memory	4 TB (16 x 256 GB)	
Memory Slot	16 x Long-DIMM DDR4	
Drive Bay	24 x 2.5-inch U.2 PCIe NVMe	
Hot-swappable	Yes	
M.2 Slot	-	
SSD Cache Acceleration Support	Yes	
Gigabit Ethernet Port (RJ45)	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (also support 10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	
10 Gigabit Ethernet Port	-	
25 Gigabit Ethernet Port	4 x 25GbE SFP28 SmartNIC port	2 x 25GbE SFP28 SmartNIC port
Thunderbolt Port	-	
PCIe Slot	5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 *Slot 4 and Slot 5 are preinstalled with 25GbE network adapters. Please reserve these slots for the 25GbE adapters for the best performance. **Slot 2 provides the width of PCIe Gen4 x8 when Slot 3 is not in use, and provides the width of PCIe Gen4 x4 when Slot 3 is in use. ***Slot 5 provides the width of PCIe Gen4 x16 when Slot 4 is not in use, and provides the width of PCIe Gen4 x8 when Slot 4 is in use.	5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 *Slot 5 is preinstalled with a 25GbE network adapter. **Slot 2 provides the width of PCIe Gen4 x8 when Slot 3 is not in use, and provides the width of PCIe Gen4 x4 when Slot 3 is in use. ***Slot 5 provides the width of PCIe Gen4 x16 when Slot 4 is not in use, and provides the width of PCIe Gen4 x8 when Slot 4 is in use.
USB 2.0 port	-	
USB 3.2 Gen 1 port	2	
USB 3.2 Gen 2 (10Gbps) Port	-	
HDMI Output	-	
Form Factor	Rackmount	
Dimensions (HxWxD)	88.3 x 480.97 x 510.23	
Weight (Net)	15.2	
Operating temperature	0 - 35°C (32°F - 95°F)	
Power Supply Unit	1100W PSU(x2), 200-240Vac, Max Wattage: 1100W@200-240Vac 850W@100-240Vac	
Power Consumption: Operating Mode, Typical	277.64	
Fan	4 x 60mm, 12VDC	
Kensington Security Slot	-	







25GbE Solution

High-speed 25GbE networking



TDS-h2489FU





Model	TDS-h2489FU-4314-512G (By Request)	TDS-h2489FU-4314-256G	TDS-h2489FU-4314-128G
CPU	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4314 16-core/ 32-thread processor, up to 3.4 GHz
CPU Architecture	64-bit x86		
Graphic Processors	-		
Floating Point Unit	-		
Encryption Engine	Yes (AES-NI)		
Hardware-accelerated Transcoding	-		
System Memory	1 TB RDIMM DDR4 ECC (32 x 32 GB)	512 GB RDIMM DDR4 ECC (16 x 32 GB)	256 GB RDIMM DDR4 ECC (8 x 32 GB)
Maximum Memory	-		
Memory Slot	32 x RDIMM DDR4 ECC (16 x slots per socket)		
Drive Bay	24 x 2.5-inch		
Hot-swappable	Yes		
M.2 Slot	2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s		
SSD Cache Acceleration Support	Yes		
Gigabit Ethernet Port (RJ45)	-		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4 (2.5G/1G/100M/10M)		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		
10 Gigabit Ethernet Port	-		
25 Gigabit Ethernet Port	2 x 25GbE SFP28 SmartNIC port		
Thunderbolt Port	-		
PCIe Slot	2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.		
USB 2.0 port	-		
USB 3.2 Gen 1 port	4		
USB 3.2 Gen 2 (10Gbps) port	-		
HDMI Output	-		
Form Factor	Rackmount		
Dimensions (HxWxD)	88.3 x 446.2 x 713.2		
Weight (Net)	21.31		
Operating Temperature	0 - 35°C (32°F - 95°F)		
Power Supply Unit	1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac		
Power Consumption: Operating Mode, Typical	467.59		
Fan	6 x 60mm, 12VDC		
Kensington Security Slot	-		




TDS-h2489FU









TDS-h2489FU-4314-128G	TDS-h2489FU-4309Y-64G
2 x Intel® Xeon® Silver 4314 16-core/32-thread processor, up to 3.4 GHz	2 x Intel® Xeon® Silver 4309Y 8-core/16-thread processor, up to 3.6 GHz
64-bit x86	
-	
-	
Yes (AES-NI)	
-	
128 GB RDIMM DDR4 ECC (8 x 16 GB)	64 GB RDIMM DDR4 ECC (8 x 8 GB)
-	
32 x RDIMM DDR4 ECC (16 x slots per socket)	
24 x 2.5-inch	
Yes	
2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s	
Yes	
-	
4 (2.5G/1G/100M/10M)	
-	
-	
2 x 25GbE SFP28 SmartNIC port	
-	
2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 *Slot 2 is preinstalled with a 25GbE network adapter. **Slot 1 provides the width of PCIe Gen4 x16 when Slot 2 is not in use, and provides the width of PCIe Gen4 x8 when Slot 2 is in use.	
-	
4	
-	
-	
Rackmount	
88.3 x 446.2 x 713.2	
21.31	
0 - 35°C (32°F - 95°F)	
1200W PSU(x2), 100-240Vac Max Wattage: 1200W@200-240Vac 1000W@100-127Vac	
467.59	
6 x 60mm, 12VDC	
-	

	TS-h3088XU-RP		TS-h2490FU	
				
Model	TS-h3088XU-RP-W1270-64G	TS-h3088XU-RP-W1250-32G	TS-h2490FU-7302P-128G	
CPU	Intel® Xeon® W-1270 8-core/ 16-thread processor, up to 5.0 GHz		AMD EPYC™ 7302P 16-core/32-thread processor, up to 3.3 GHz	
CPU Architecture	64-bit x86		64-bit x86	
Graphic Processors	-		-	
Floating Point Unit	Yes		-	
Encryption Engine	Yes (AES-NI)		Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes		-	
System Memory	64 GB UDIMM DDR4 ECC (4 x 16 GB)	32 GB UDIMM DDR4 ECC (2 x 16 GB)	128 GB RDIMM DDR4 ECC (8 x 16 GB)	
Maximum Memory	128 GB (4 x 32 GB)		4 TB (16 x 256 GB)	
Memory Slot	4 x Long-DIMM DDR4		16 x Long-DIMM DDR4	
Drive Bay	Front: 24 x 2.5-inch SATA 6Gb/s, 3Gb/s Rear: 6 x 2.5-inch SATA 6Gb/s, 3Gb/s		24 x 2.5-inch U.2 PCIe NVMe	
Hot-swappable	Yes		Yes	
M.2 Slot	-		-	
SSD Cache Acceleration Support	Yes		Yes	
Gigabit Ethernet Port (RJ45)	-		-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4		2 (also support 10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via an adapter		-	
10 Gigabit Ethernet Port	Optional via an adapter		-	
25 Gigabit Ethernet Port	2		4 x 25GbE SFP28 SmartNIC port	
Thunderbolt Port	-		-	
PCIe Slot	3 Slot 1: PCIe Gen3 x8 or x4 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 25GbE network adapter. Please reserve this slot for the 25GbE adapter for the best performance. **Slot 1 provides the width of PCIe Gen3 x8 when Slot 2 is not in use, and provides the width of PCIe Gen3 x4 when Slot 2 is in use.		5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 *Slot 4 and Slot 5 are preinstalled with 25GbE network adapters. Please reserve these slots for the 25GbE adapters for the best performance. **Slot 2 provides the width of PCIe Gen4 x8 when Slot 3 is not in use, and provides the width of PCIe Gen4 x4 when Slot 3 is in use. ***Slot 5 provides the width of PCIe Gen4 x16 when Slot 4 is not in use, and provides the width of PCIe Gen4 x8 when Slot 4 is in use.	
USB 2.0 port	-		-	
USB 3.2 Gen 1 port	-		2	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps		-	
HDMI Output	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)		-	
Form Factor	Rackmount		Rackmount	
Dimensions (HxWxD)	88.3 x 481.07 x 515.02		88.3 x 480.97 x 510.23	
Weight (Net)	12.26		15.2	
Operating temperature	0 - 40°C (32°F - 104°F)		0 - 35°C (32°F - 95°F)	
Power Supply Unit	550W(x2), 100-240V		1100W PSU(x2), 200-240Vac, Max Wattage: 1100W@200-240Vac 850W@100-240Vac	
Power Consumption: Operating Mode, Typical	261.81		277.64	
Fan	3 x 60mm, 12VDC		4 x 60mm, 12VDC	
Kensington Security Slot	-		-	



TS-h2490FU	
	
TS-h2490FU-7232P-64G	
AMD EPYC™ 7232P 8-core/16-thread processor, up to 3.2 GHz	
64-bit x86	
-	
-	
Yes (AES-NI)	
-	
64 GB RDIMM DDR4 ECC (8 x 8 GB)	
4 TB (16 x 256 GB)	
16 x Long-DIMM DDR4	
24 x 2.5-inch U.2 PCIe NVMe	
Yes	
-	
Yes	
-	
2 (also support 10M)	
-	
-	
2 x 25GbE SFP28 SmartNIC port	
-	
5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 *Slot 5 is preinstalled with a 25GbE network adapter. **Slot 2 provides the width of PCIe Gen4 x8 when Slot 3 is not in use, and provides the width of PCIe Gen4 x4 when Slot 3 is in use. ***Slot 5 provides the width of PCIe Gen4 x16 when Slot 4 is not in use, and provides the width of PCIe Gen4 x8 when Slot 4 is in use.	
-	
2	
-	
-	
Rackmount	
88.3 x 480.97 x 510.23	
15.2	
0 - 35°C (32°F - 95°F)	
1100W PSU(x2), 200-240Vac, Max Wattage: 1100W@200-240Vac 850W@100-240Vac	
277.64	
4 x 60mm, 12VDC	
-	

QSW-M5216-1T	
	
Management Type	Web Managed
Management Port	1 x 1GbE RJ45
Power Supply Description	Internal Power Supply Unit
Max. Power Consumption	29.07W
Input Power Type	AC
Input Voltage Range	100-240VAC, 50/60 Hz
MAC Address Table	16K
Total Non-Blocking Throughput	410Gbps
Switching Capacity	820Gbps
Management Interface	Web
Console	RS232
Energy Efficient Ethernet (IEEE 802.3az complaint)	Yes
Fan	Yes
Supported Standards	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.3by 25 Gigabit Ethernet IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service Forward Error Correction(FEC)
Number of Ports	17
10GbE SFP+	-
25GbE SFP28	16
10GbE BASE-T (RJ45)	1
10GbE SFP+/RJ45 Combo Ports	-
2.5GbE (RJ45)	-
1GbE (RJ45)	-
Total PoE Ports	-
PoE PSE (802.3af, 15.4W)	-
PoE+ PSE (802.3at, 30W)	-
PoE++ PSE (802.3bt, 90W)	-
PoE Power Output	-
Total PoE Power Budget	-
Form Factor	Rackmount
Dimensions (HxWxD)	43.5 x 285 x 237.7
Weight (Net)	2.15









10GbE Solution



10GbE connectivity:
The future is now!





	ES1686dc	ES1686dc	
			
Model	ES1686dc-2142IT-128G	ES1686dc-2142IT-96G	
CPU	Intel® Xeon® D-2142IT 8-core 1.90 GHz processor (burst up to 3.0 GHz) per controller	Intel® Xeon® D-2142IT 8-core 1.90 GHz processor (burst up to 3.0 GHz) per controller	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	-	-	
System Memory	64 GB RDIMM DDR4 ECC (4 x 16 GB) per controller	48 GB RDIMM DDR4 ECC (4 x 4 GB+4 x 8GB) per controller	
Maximum Memory	512 GB (8 x 64GB)	512 GB (8 x 64GB)	
Memory Slot	8 x R-DIMM/LR-DIMM DDR4 IMPORTANT: You can only use one type of dual in-line memory module (DIMM) at a time. Do not use registered DIMM (RDIMM) with load-reduction DIMM (LRDIMM) memory.	8 x R-DIMM/LR-DIMM DDR4 IMPORTANT: You can only use one type of dual in-line memory module (DIMM) at a time. Do not use registered DIMM (RDIMM) with load-reduction DIMM (LRDIMM) memory.	
Drive Bay	16 x 3.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s	16 x 3.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s	
Hot-swappable	Yes	Yes	
M.2 slot	-	-	
SSD Cache Acceleration Support	Yes Read cache only	Yes Read cache only	
Gigabit Ethernet Port (RJ45)	3 for each controller (one for remote management)	3 for each controller (one for remote management)	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	-	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-	
10 Gigabit Ethernet Port	4 x 10GbE SFP+ for each controller	4 x 10GbE SFP+ for each controller	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU)	2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU)	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	2 per each controller	2 per each controller	
USB 3.2 Gen 2 (10Gbps) Port	-	-	
HDMI Output	-	-	
Form Factor	3U Rackmount	3U Rackmount	
Dimensions (HxWxD)	132 x 483.05 x 630.62	132 x 483.05 x 630.62	
Weight (Net)	25.83	25.83	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	Redundant/ Hot Swap Power Vin:90~264VAC;770W	Redundant/ Hot Swap Power Vin:90~264VAC;770W	
Power Consumption: Operating Mode, Typical	500.87	500.87	
Fan	Hot-swappable fan module (60*60*38mm; 16000RPM/12v/2.8A x 3)	Hot-swappable fan module (60*60*38mm; 16000RPM/12v/2.8A x 3)	
Kensington Security Slot	-	-	





	ES1686dc	ES2486dc
		
	ES1686dc-2123IT-64G	ES2486dc-2142IT-128G
	Intel® Xeon® D-2123IT 4-core 2.20 GHz processor (burst up to 3.0 GHz) per controller	Intel® Xeon® D-2142IT 8-core 1.90 GHz processor, up to 3.0 GHz
	64-bit x86	64-bit x86
	-	-
	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)
	-	-
	32 GB RDIMM DDR4 ECC (4x 8 GB) per controller	64 GB RDIMM DDR4 ECC (4 x 16 GB) per controller
	512 GB (8 x 64GB)	512 GB (8 x 64GB)
	8 x R-DIMM/LR-DIMM DDR4 IMPORTANT: You can only use one type of dual in-line memory module (DIMM) at a time. Do not use registered DIMM (RDIMM) with load-reduction DIMM (LRDIMM) memory.	8 x R-DIMM/LR-DIMM DDR4 IMPORTANT: You can only use one type of dual in-line memory module (DIMM) at a time. Do not use registered DIMM (RDIMM) with load-reduction DIMM (LRDIMM) memory.
	16 x 3.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s	24 x 2.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s
	Yes	Yes
	-	-
	Yes Read cache only	Yes Read cache only
	3 for each controller (one for remote management)	3 for each controller (one for remote management)
	-	-
	-	-
	4 x 10GbE SFP+ for each controller	4 x 10GbE SFP+ for each controller
	-	-
	-	-
	2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU)	2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU)
	-	-
	2 per each controller	2 per each controller
	-	-
	-	-
	3U Rackmount	2U Rackmount
	132 x 483.05 x 630.62	88.3 x 483 x 545.1
	25.83	27.41
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	Redundant/ Hot Swap Power Vin:90~264VAC;770W	Redundant/ Hot Swap Power Vin:90~264VAC;700W
	500.87	579.59
)	Hot-swappable fan module (60*60*38mm; 16000RPM/12v/2.8A x 3)	Hot-swappable fan module (60*60*38mm; 16000RPM/12v/2.8A x 3)
	-	-



	ES2486dc	TS-h1886XU-RP R2
		
Model	ES2486dc-2142IT-96G	TS-h1886XU-RP-R2-D1622-32G
CPU	Intel® Xeon® D-2142IT 8-core 1.90 GHz processor, up to 3.0 GHz	Intel® Xeon® D-1622 4-core processor, burst up to 3.2 GHz
CPU Architecture	64-bit x86	64-bit x86
Graphic Processors	-	-
Floating Point Unit	Yes	Yes
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)
Hardware-accelerated Transcoding	-	-
System Memory	48 GB RDIMM DDR4 ECC (4 x 4 GB+4 x 8GB) per controller	32 GB UDIMM DDR4 ECC (2 x 16GB)
Maximum Memory	512 GB (8 x 64GB)	128 GB (4 x 32 GB)
Memory Slot	8 x R-DIMM/LR-DIMM DDR4 IMPORTANT: You can only use one type of dual in-line memory module (DIMM) at a time. Do not use registered DIMM (RDIMM) with load-reduction DIMM (LRDIMM) memory.	4 x UDIMM DDR4
Drive Bay	24 x 2.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s	Front: 12 x 3.5-inch SATA 6Gb/s, 3Gb/s Rear: 6 x 2.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes	Yes
M.2 slot	-	-
SSD Cache Acceleration Support	Yes Read cache only	Yes
Gigabit Ethernet Port (RJ45)	3 for each controller (one for remote management)	-
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	4 (2.5G/1G/100M)
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-
10 Gigabit Ethernet Port	4 x 10GbE SFP+ for each controller	2 x 10GbE SFP+ SmartNIC port Pre-installed with a 10GbE PCIe adapter
25 Gigabit Ethernet Port	-	-
Thunderbolt Port	-	-
PCIe Slot	2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU)	3 Slot 1: PCIe Gen 2 x4 (x8 Slot) Slot 2: PCIe Gen 3 x4 Slot 3: PCIe Gen 3 x8 or x4 (x8 Slot) *Slot 3 is preinstalled with a 10GbE network adapter. **Slot 3 provides the width of PCIe Gen 3 x8 when Slot 2 is not in use, and provides the width of PCIe Gen 3 x4 when Slot 2 is in use.
USB 2.0 port	-	-
USB 3.2 Gen 1 port	2 per each controller	2
USB 3.2 Gen 2 (10Gbps) Port	-	-
HDMI Output	-	-
Form Factor	2U Rackmount	Rackmount
Dimensions (HxWxD)	88.3 x 483 x 545.1	88.3 x 482 x 549.7
Weight (Net)	27.41	12.73
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	Redundant/ Hot Swap Power Vin:90~264VAC;700W	550W(x2), 100-240V
Power Consumption: Operating Mode, Typical	579.59	117.92
Fan	Hot-swappable fan module (60*60*38mm; 16000RPM/12v/2.8A x 3)	System fan: 3 x 60mm, 12VDC
Kensington Security Slot	-	-





	TVS-h1288X	TVS-h1688X
		
	TVS-h1288X-W1250-16G	TVS-h1688X-W1250-32G
	Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz	Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz
	64-bit x86	64-bit x86
	Intel® UHD Graphics P630	Intel® UHD Graphics P630
	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)
	Yes	Yes
	16 GB ECC UDIMM DDR4 (2 x 8 GB)	32GB ECC UDIMM DDR4 (2 x 16 GB)
	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)
	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
	8 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s	12 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s
	Yes	Yes
	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots
	Yes	Yes
	-	-
	4 (also support 10M)	4 (also support 10M)
	Optional via an adapter	Optional via an adapter
	2 x 10GBASE-T (10G/1G)	2 x 10GBASE-T (10G/1G)
	Optional via an adapter	Optional via an adapter
	Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter	Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter
	3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 2-port 10GbE network adapter.	3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 2-port 10GbE network adapter.
	-	-
	-	-
	2 x Type-C 3 x Type-A	2 x Type-C 4 x Type-A
	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)
	Tower	Tower
	234.6 x 369.9 x 319.8	303.84 x 369.89 x 319.8
	11.27	13.41
	0 - 40°C (32°F - 104°F)	0 - 40°C (32°F - 104°F)
	550W PSU, 100~240V	550W PSU, 100~240V
	97.492	108.67
	System fan: 3 x 80mm, 12VDC CPU fan: 2 x 97mm, 12VDC	System fan: 3 x 80mm, 12VDC CPU fan: 2 x 97mm, 12VDC
	Yes	Yes

	TS-h987XU-RP	TS-h1887XU-RP	
			
Model	TS-h987XU-RP-E2334-16G	TS-h1887XU-RP-E2334-16G	TS-h1887XU-RP-E2336-32G
CPU	Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz	Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz	Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	-	-	
System Memory	16 GB ECC DDR4 (1 x 16 GB)	16 GB ECC DDR4 (1 x 16 GB)	32 GB ECC DDR4 (2 x 16 GB)
Maximum Memory	128GB (4 x 32 GB)	128GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4	
Drive Bay	9 (4 x 3.5-inch SATA + 5 x 2.5-inch U.2 PCIe / SATA) 2.5-inch bays: #1: PCIe Gen3 x2 & SATA 6Gbps #2: PCIe Gen3 x2 & SATA 6Gbps #3: PCIe Gen3 x2 & SATA 6Gbps #4: PCIe Gen4 x4 & SATA 6Gbps #5: PCIe Gen4 x4 & SATA 6Gbps	18 (12 x 3.5-inch SATA + 6 x 2.5-inch SATA)	
Hot-swappable	-	-	
M.2 Slot	Optional via a QM2 PCIe adapter	Optional via a QM2 PCIe adapter	Optional via a QM2 PCIe adapter
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M)	2 (2.5G/1G/100M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)			
10 Gigabit Ethernet Port	2 x 10GBASE-T (10G/5G/2.5G/1G/100M)	2 x 10GBASE-T (10G/5G/2.5G/1G/100M)	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	1 x Gen4 x8	3 (2 x Gen4 x4 + 1 x Gen 4 x8)	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	-	-	
USB 3.2 Gen 2 (10Gbps) port	4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps	4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps	
HDMI Output	-	-	
Form Factor	1U Rackmount	2U Rackmount	
Dimensions (HxWxD)	43.3 x 430 x 479	88 x 483 x 630	
Weight (Net)	8.43	13	
Operating Temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	-	-	
Power Consumption: Operating Mode, Typical	-	-	
Fan	4 x 40mm, 12VDC	4 x 60mm, 12VDC	
Kensington Security Slot	-	-	



TS-h2287XU-RP		TS-h3087XU-RP
		
TS-h2287XU-RP-E2336-32G	TS-h2287XU-RP-E2378-64G	TS-h3087XU-RP-E2378-64G
Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz	Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz	Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz
64-bit x86		64-bit x86
-		-
Yes		Yes
Yes (AES-NI)		Yes (AES-NI)
-		-
32 GB ECC DDR4 (2 x 16 GB)	64 GB ECC DDR4 (4 x 16 GB)	64 GB ECC DDR4 (4 x 16 GB)
128GB (4 x 32 GB)		128GB (4 x 32 GB)
4 x Long-DIMM DDR4.		4 x Long-DIMM DDR4
22 (16 x 3.5-inch SATA + 6 x 2.5-inch SATA)		30 (24 x 3.5-inch SATA + 6 x 2.5-inch SATA)
-		-
Optional via a QM2 PCIe adapter		Optional via a QM2 PCIe adapter
Yes		Yes
-		-
2 (2.5G/1G/100M)		2 (2.5G/1G/100M)
2 x 10GBASE-T (10G/5G/2,5G/1G/100M)		2 x 10GBASE-T (10G/5G/2,5G/1G/100M)
-		-
-		-
3 (2 x Gen4 x4 +1 x Gen 4 x8)		3 (2 x Gen4 x4 +1 x Gen 4 x8)
-		-
-		-
4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps		4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps
-		-
3U Rackmount		4U Rackmount
133 x 483 x 630		178 x 483 x 630
15.64		21.78
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)
-		-
-		-
3 x 60mm + 1 x 80mm, 12VDC		4 x 80mm, 12VDC
-		-

	TS-h2483XU-RP	TS-h1683XU-RP
		
Model	TS-h2483XU-RP-E2236-128G	TS-h1683XU-RP-E2236-128G
CPU	Intel® Xeon® E-2236 6-core 3.4 GHz processor (burst up to 4.8 GHz)	Intel® Xeon® E-2236 6-core 3.4 GHz processor (burst up to 4.8 GHz)
CPU Architecture	64-bit x86	64-bit x86
Graphic Processors	-	-
Floating Point Unit	Yes	Yes
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)
Hardware-accelerated Transcoding	-	-
System Memory	128 GB UDIMM DDR4 ECC (4 x 32GB)	128 GB UDIMM DDR4 ECC (4 x 32GB)
Maximum Memory	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
Drive Bay	24 x 3.5-inch SATA 6Gb/s, 3Gb/s	16 x 3.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes	Yes
M.2 slot	-	-
SSD Cache Acceleration Support	Yes	Yes
Gigabit Ethernet Port (RJ45)	4	4
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	-
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-
10 Gigabit Ethernet Port	2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port	2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port
25 Gigabit Ethernet Port	-	-
Thunderbolt Port	-	-
PCIe Slot	5 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x4 (CPU) Slot 3: PCIe Gen 2 x4 (PCH) Slot 4: PCIe Gen 3 x8 (CPU) Slot 5: PCIe Gen 2 x4 (PCH) Slot 2 and slot 4 are preinstalled with 10GbE network adapters.	4 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x8 (CPU) Slot 3: PCIe Gen 3 x4 (CPU) Slot 4: PCIe Gen 3 x4 (CPU) Slot 2 and slot 4 are preinstalled with 10GbE network adapters.
USB 2.0 port	-	-
USB 3.2 Gen 1 port	-	-
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps	2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps
HDMI Output	-	-
Form Factor	4U Rackmount	3U Rackmount
Dimensions (HxWxD)	176.15 x 481.04 x 672.02	130 x 481 x 573.5
Weight (Net)	20.67	13.76
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	800W(x2), 100-240V	500W(x2), 100-240V
Power Consumption: Operating Mode, Typical	168.97	149
Fan	System fan: 3 x 80mm, 12VDC	System fan: 4 x 92mm, 12VDC
Kensington Security Slot	-	-



TS-h1283XU-RP



TS-h1283XU-RP-E2236-128G

TS-h1283XU-RP-E2236-32G

Intel® Xeon® E-2236 6-core/12-thread 3.4 GHz processor, up to 4.8 GHz

64-bit x86

-

Yes

Yes (AES-NI)

-

128 GB UDIMM DDR4 ECC (4 x 32GB)

32 GB UDIMM DDR4 ECC (2 x 16GB)

128 GB (4 x 32 GB)

4 x Long-DIMM DDR4

12 x 3.5-inch SATA 6Gb/s, 3Gb/s

Yes

-

Yes

4

-

-

2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port

-

-

4

Slot 1: PCIe Gen 2 x4 (PCH)

Slot 2: PCIe Gen 3 x8 (CPU)

Slot 3: PCIe Gen 3 x4 (CPU)

Slot 4: PCIe Gen 3 x4 (CPU)

Slot 3 and slot 4 are preinstalled with 10GbE network adapters

-

-

2 x Type-C USB 3.2 Gen 2 10Gbps

4 x Type-A USB 3.2 Gen 2 10Gbps

-

2U Rackmount

88.3 x 482 x 562

11.75



0 - 40 °C (32°F - 104°F)

500W(x2), 100-240V



105.12



System fan: 2 x 60mm, 12VDC

-



	TS-2483XU-RP	TS-1683XU-RP	
			
Model	TS-2483XU-RP-E2136-16G	TS-1683XU-RP-E2124-16G	
CPU	Intel® Xeon® E-2136 6-core 3.3 GHz processor (burst up to 4.5 GHz)	Intel® Xeon® E-2124 quad-core 3.3 GHz processor (burst up to 4.3 GHz)	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	-	-	
System Memory	16 GB UDIMM DDR4 ECC (2 x 8GB)	16 GB UDIMM DDR4 ECC (2 x 8GB)	
Maximum Memory	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4	
Drive Bay	24 x 3.5-inch SATA 6Gb/s, 3Gb/s	16 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 slot	-	-	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	4	4	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	-	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-	
10 Gigabit Ethernet Port	2 x 10GbE SFP+ SmartNIC port	2 x 10GbE SFP+ SmartNIC port	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	5 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x4 (CPU) Slot 3: PCIe Gen 2 x4 (PCH) Slot 4: PCIe Gen 3 x8 (CPU) Slot 5: PCIe Gen 2 x4 (PCH) Slot 5 is preinstalled with a 10GbE network adapter	4 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x8 (CPU) Slot 3: PCIe Gen 3 x4 (CPU) Slot 4: PCIe Gen 3 x4 (CPU) Slot 4 is preinstalled with a 10GbE network adapter	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	-	-	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps	2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps	
HDMI Output	-	-	
Form Factor	4U Rackmount	3U Rackmount	
Dimensions (HxWxD)	176.15 x 481.04 x 672.02	130 x 481 x 573.5	
Weight (Net)	20.67	13.76	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	800W(x2), 100-240V	500W(x2), 100-240V	
Power Consumption: Operating Mode, Typical	168.97	130.43	
Fan	System fan: 4 x 92mm, 12VDC	System fan: 4 x 92mm, 12VDC	
Kensington Security Slot	-	-	





	TS-1283XU-RP	TS-983XU-RP
		
	TS-1283XU-RP-E2124-8G	TS-983XU-RP-E2124-8G
2)	Intel® Xeon® E-2124 quad-core 3.3 GHz processor (burst up to 4.3 GHz)	Intel® Xeon® E-2124 quad-core 3.3 GHz processor (burst up to 4.3 GHz)
	64-bit x86	64-bit x86
	-	-
	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)
	-	-
	8 GB UDIMM DDR4 ECC (2 x 4GB)	8 GB UDIMM DDR4 ECC (2 x 4GB)
	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)
	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
	12 x 3.5-inch SATA 6Gb/s, 3Gb/s	4 x 3.5-inch + 5 x 2.5-inch SATA 6Gb/s, 3Gb/s
	Yes	Yes
	-	-
	Yes	Yes
	4	2
	-	-
	-	-
	2 x 10GbE SFP+ SmartNIC port	2 x 10GbE SFP+ SmartNIC port
	-	-
	-	-
	4 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x8 (CPU) Slot 3: PCIe Gen 3 x4 (CPU) Slot 4: PCIe Gen 3 x4 (CPU) Slot 4 is preinstalled with a 10GbE network adapter	1 Slot 1: PCIe Gen 3 x16
	-	-
	-	4
	2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps	2 x Type-C USB 3.2 Gen 2 10Gbps
	-	-
	2U Rackmount	1U Rackmount
	88.3 x 482 x 562	43.3 x 482.6 x 507.54
	11.75	8.63
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	300W(x2), 100-240V	300W(x2), 100-240V
	105.12	84.74
	System fan: 2 x 60mm, 12VDC	System fan: 3 x 40mm, 12VDC
	-	-

	TS-983XU	TS-883XU-RP	
			
Model	TS-983XU-E2124-8G	TS-883XU-RP-E2124-8G	
CPU	Intel® Xeon® E-2124 quad-core 3.3 GHz processor (burst up to 4.3 GHz)	Intel® Xeon® E-2124 quad-core 3.3 GHz processor (burst up to 4.3 GHz)	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	-	-	
System Memory	8 GB UDIMM DDR4 ECC (2 x 4GB)	8 GB UDIMM DDR4 ECC (2 x 4GB)	
Maximum Memory	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4	
Drive Bay	4 x 3.5-inch + 5 x 2.5-inch SATA 6Gb/s, 3Gb/s	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 slot	-	-	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	2	4	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	-	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-	
10 Gigabit Ethernet Port	2 x 10GbE SFP+ SmartNIC port	2 x 10GbE SFP+ SmartNIC port	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	1 Slot 1: PCIe Gen 3 x16	4 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x8 (CPU) Slot 3: PCIe Gen 3 x4 (CPU) Slot 4: PCIe Gen 3 x4 (CPU) Slot 4 is preinstalled with a 10GbE network adapter	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	4	-	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps	2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps	
HDMI Output	-	-	
Form Factor	1U Rackmount	2U Rackmount	
Dimensions (HxWxD)	43.3 x 482.6 x 484.15	88.3 x 482 x 562	
Weight (Net)	7.48	10.99	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W, 100-240V	300W(x2), 100-240V	
Power Consumption: Operating Mode, Typical	74.35	89.99	
Fan	System fan: 3 x 40mm, 12VDC	System fan: 2 x 60mm, 12VDC	
Kensington Security Slot	-	-	



	TS-883XU	TS-977XU-RP
		
	TS-883XU-E2124-8G	TS-977XU-RP-3600-8G
2)	Intel® Xeon® E-2124 quad-core 3.3 GHz processor (burst up to 4.3 GHz)	AMD Ryzen™ 5 3600 6-core/12-thread processor, burst up to 4.2 GHz
	64-bit x86	64-bit x86
	-	-
	Yes	-
	Yes (AES-NI)	Yes (AES-NI)
	-	-
	8 GB UDIMM DDR4 ECC (2 x 4GB)	8 GB UDIMM DDR4 (1 x 8GB)
	128 GB (4 x 32 GB)	64 GB (4 x 16 GB)
	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	4 x 3.5-inch + 5 x 2.5-inch SATA 6Gb/s, 3Gb/s
	Yes	Yes
	-	-
	Yes	Yes
	4	2
	-	-
	-	-
	2 x 10GbE SFP+ SmartNIC port	2 x 10GbE SFP+ SmartNIC port
	-	-
	-	-
	4 Slot 1: PCIe Gen 2 x4 (PCH) Slot 2: PCIe Gen 3 x8 (CPU) Slot 3: PCIe Gen 3 x4 (CPU) Slot 4: PCIe Gen 3 x4 (CPU) Slot 4 is preinstalled with a 10GbE network adapter	1 Slot 1: PCIe Gen 3 x16
	-	-
	-	4
	2 x Type-C USB 3.2 Gen 2 10Gbps 4 x Type-A USB 3.2 Gen 2 10Gbps	1 x Type-A USB 3.2 Gen 2 10Gbps
	-	-
	2U Rackmount	1U Rackmount
	88.3 x 482 x 562	43.3 x 482.6 x 505.54
	10.39	8.62
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	350W, 100-240V	300W(x2), 100-240V
	72.16	76.43
	System fan: 2 x 60mm, 12VDC	System fan: 3 x 40mm, 12VDC
	-	-

	TS-877XU-RP	TVS-872XT
		
Model	TS-877XU-RP-3600-8G	TVS-872XT-i5-16G
CPU	AMD Ryzen™ 5 3600 6-core/12-thread processor, burst up to 4.2 GHz	Intel® Core™ i5-8400T 6-core/6-thread Processor, burst up to 3.3 GHz
CPU Architecture	64-bit x86	64-bit x86
Graphic Processors	-	Intel® UHD Graphics 630
Floating Point Unit	Yes	Yes
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)
Hardware-accelerated Transcoding	-	Yes
System Memory	8 GB UDIMM DDR4 (2 x 4GB)	16 GB SODIMM DDR4 (2 x 8 GB)
Maximum Memory	64 GB (4 x 16 GB)	64 GB (2 x 32 GB)
Memory Slot	4 x Long-DIMM DDR4	2 x SO-DIMM DDR4
Drive Bay	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	8 x 3.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes	Yes
M.2 slot	-	2 x M.2 2280 PCIe Gen3 x2 slots
SSD Cache Acceleration Support	Yes	Yes
Gigabit Ethernet Port (RJ45)	2	2
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	-
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-
10 Gigabit Ethernet Port	2 x 10GbE SFP+ SmartNIC port	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)
25 Gigabit Ethernet Port	-	-
Thunderbolt Port	-	2 (Thunderbolt™ 3)
PCIe Slot	4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4* Slot 3: PCIe Gen 3 x4 Slot 4: PCIe Gen 3 x8 or PCIe Gen 3 x4** *Slot 2 provides the width of PCIe Gen.3 x8 when Slot 1 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 1 is in use. **Slot 3 provides the width of PCIe Gen.3 x8 when Slot 4 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 4 is in use.	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter
USB 2.0 port	-	-
USB 3.2 Gen 1 port	4	1
USB 3.2 Gen 2 (10Gbps) Port	1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps
HDMI Output	-	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)
Form Factor	2U Rackmount	Tower
Dimensions (HxWxD)	88.3 x 482 x 562	188.2 x 329.3 x 279.6
Weight (Net)	13.31	7.06
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	300W (x2), 100-240V	250W, 100-240V
Power Consumption: Operating Mode, Typical	86.04	65.03
Fan	System fan: 2 x 70mm, 12VDC	System fan: 2 x 120mm, 12VDC CPU fan: 2 x 60mm blower fan
Kensington Security Slot	-	Yes



TVS-672XT





TVS-672XT-i5-8G		TVS-672XT-i3-8G	
z	Intel® Core™ i5-8400T 6-core/6-thread Processor, burst up to 3.3 GHz	Intel® Core™ i3-8100T 4-core/4-thread 3.1 GHz Processor	
	64-bit x86		
	Intel® UHD Graphics 630		
	Yes		
	Yes (AES-NI)		
	Yes		
	8 GB SODIMM DDR4 (2 x 4 GB)		
	64 GB (2 x 32 GB)		
	2 x SO-DIMM DDR4		
	6 x 3.5-inch SATA 6Gb/s, 3Gb/s		
	Yes		
	2 x M.2 2280 PCIe Gen3 x2 slots		
	Yes		
	2		
	-		
	-		
	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)		
	-		
	2 (Thunderbolt™ 3)		
	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter		
	-		
	1		
	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps		
	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)		
	Tower		
	188.2 x 264.3 x 279.6		
	6.553		
	0 - 40 °C (32°F - 104°F)		
	250W, 100-240V		
	45.6		
	System fan: 2 x 92mm, 12VDC CPU fan: 2 x 60mm blower fan		
	Yes		



TVS-472XT





Model	TVS-472XT-i5-4G	TVS-472XT-i3-4G	TVS-472XT-PT-4G
CPU	Intel® Core™ i5-8400T 6-core/ 6-thread Processor, burst up to 3.3 GHz	Intel® Core™ i3-8100T 4-core/ 4-thread 3.1 GHz Processor	Intel® Pentium G5400T 2-core/ 4-thread 3.1 GHz Processor
CPU Architecture	64-bit x86		
Graphic Processors	Intel® UHD Graphics 630		Intel® UHD Graphics 610
Floating Point Unit	Yes		
Encryption Engine	Yes (AES-NI)		
Hardware-accelerated Transcoding	Yes		
System Memory	4 GB SODIMM DDR4 (1 x 4 GB)		4 GB SODIMM DDR4 (2 x 2 GB)
Maximum Memory	64 GB (2 x 32 GB)		
Memory Slot	2 x SO-DIMM DDR4		
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s		
Hot-swappable	Yes		
M.2 slot	2 x M.2 2280 PCIe Gen3 x2 slots		
SSD Cache Acceleration Support	Yes		
Gigabit Ethernet Port (RJ45)	2		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		
10 Gigabit Ethernet Port	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)		
25 Gigabit Ethernet Port	-		
Thunderbolt Port	2 (Thunderbolt™ 3)		
PCIe Slot	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter		
USB 2.0 port	-		
USB 3.2 Gen 1 port	1		
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps		
HDMI Output	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)		
Form Factor	Tower		
Dimensions (HxWxD)	188.2 x 199.3 x 279.6		
Weight (Net)	5.4		
Operating temperature	0 - 40 °C (32°F - 104°F)		
Power Supply Unit	250W, 100-240V		
Power Consumption: Operating Mode, Typical	37.32		
Fan	System fan: 1 x 120mm, 12VDC CPU fan: 2 x 60mm blower fan		
Kensington Security Slot	Yes		





TS-h2477XU-RP	TS-h1677XU-RP
	
TS-h2477XU-RP-3700X-32G	TS-h1677XU-RP-3700X-32G
AMD Ryzen™ 7 3700X 8-core/16-thread processor, burst up to 4.4 GHz	AMD Ryzen™ 7 3700X 8-core/16-thread processor, burst up to 4.4 GHz
64-bit x86	64-bit x86
-	-
Yes	Yes
Yes (AES-NI)	Yes (AES-NI)
-	-
32 GB UDIMM DDR4 (2 x 16GB)	32 GB UDIMM DDR4 (2 x 16GB)
128 GB (4 x 32 GB)	128 GB (4 x 32 GB)
4 x Long-DIMM DDR4	4 x Long-DIMM DDR4
24 x 3.5-inch SATA 6Gb/s, 3Gb/s	16 x 3.5-inch SATA 6Gb/s, 3Gb/s
Yes	Yes
-	-
Yes	Yes
2	2
-	-
-	-
2 x 10GbE SFP+ SmartNIC port	2 x 10GbE SFP+ SmartNIC port
-	-
-	-
4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4* Slot 3: PCIe Gen 3 x8 or PCIe Gen 3 x4** Slot 4: PCIe Gen 3 x4 *Slot 2 provides the width of PCIe Gen.3 x8 when Slot 1 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 1 is in use. **Slot 3 provides the width of PCIe Gen.3 x8 when Slot 4 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 4 is in use. ***PCIe slot 4 is preinstalled with a 10GbE network adapter	4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4* Slot 3: PCIe Gen 3 x4 Slot 4: PCIe Gen 3 x8 or PCIe Gen 3 x4** *Slot 2 provides the width of PCIe Gen.3 x8 when Slot 1 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 1 is in use. **Slot 3 provides the width of PCIe Gen.3 x8 when Slot 4 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 4 is in use.
-	-
4	4
1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps	1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps
-	-
4U Rackmount	3U Rackmount
176.15 x 481.04 x 672.02	130 x 481 x 573.5
22.66	15.26
0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
800W(x2), 100-240V	500W(x2), 100-240V
143.97	136.45
System fan: 4 x 92mm, 12VDC	System fan: 4 x 92mm, 12VDC
-	-



	TS-h1277XU-RP		TS-h977XU-RP
			
Model	TS-h1277XU-RP-3700X-128G	TS-h1277XU-RP-3700X-32G	TS-h977XU-RP-3700X-32G
CPU	AMD Ryzen™ 7 3700X 8-core/ 16-thread processor, burst up to 4.4 GHz		AMD Ryzen™ 7 3700X 8-core/ 16-thread processor, burst up to 4.4 GHz
CPU Architecture	64-bit x86		64-bit x86
Graphic Processors	-		-
Floating Point Unit	Yes		-
Encryption Engine	Yes (AES-NI)		Yes (AES-NI)
Hardware-accelerated Transcoding	-		-
System Memory	128 GB UDIMM DDR4 (4 x 32GB)	32 GB UDIMM DDR4 (2 x 16GB)	32 GB UDIMM DDR4 (2 x 16GB)
Maximum Memory	128 GB (4 x 32 GB)		128 GB (4 x 32 GB)
Memory Slot	4 x Long-DIMM DDR4		4 x Long-DIMM DDR4
Drive Bay	12 x 3.5-inch SATA 6Gb/s, 3Gb/s		4 x 3.5-inch + 5 x 2.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes		Yes
M.2 slot	-		-
SSD Cache Acceleration Support	Yes		Yes
Gigabit Ethernet Port (RJ45)	2		2
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-		-
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		-
10 Gigabit Ethernet Port	2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port		2 x 10GbE SFP+ SmartNIC port, 2 x 10GBase-T port
25 Gigabit Ethernet Port	-		-
Thunderbolt Port	-		-
PCIe Slot	4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4* Slot 3: PCIe Gen 3 x4 Slot 4: PCIe Gen 3 x8 or PCIe Gen 3 x4** *Slot 2 provides the width of PCIe Gen.3 x8 when Slot 1 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 1 is in use. **Slot 3 provides the width of PCIe Gen.3 x8 when Slot 4 is not in use, and provides the width of PCIe Gen.3 x4 when Slot 4 is in use. ***PCIe slot 4 is preinstalled with a 10GbE network adapter		1 Slot 1: PCIe Gen 3 x16 PCIe slot is preinstalled with a 10GbE network adapter
USB 2.0 port	-		-
USB 3.2 Gen 1 port	4		4
USB 3.2 Gen 2 (10Gbps) Port	1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps		1 x Type-A USB 3.2 Gen 2 10Gbps
HDMI Output	-		-
Form Factor	2U Rackmount		1U Rackmount
Dimensions (HxWxD)	88.3 x 482 x 562		43.3 x 482.6 x 505.54
Weight (Net)	13.73		8.62
Operating temperature	0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)
Power Supply Unit	300W (x2), 100-240V		300W(x2), 100-240V
Power Consumption: Operating Mode, Typical	106.66		76.43
Fan	System fan: 2 x 70mm, 12VDC		System fan: 3 x 40mm, 12VDC
Kensington Security Slot	-		-





TS-h973AX		TS-1232PXU-RP
		
TS-h973AX-32G	TS-h973AX-8G	TS-1232PXU-RP-4G
AMD Ryzen™ Embedded V1500B 4-core/ 8-thread 2.2 GHz processor		AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor
64-bit x86		64-bit ARM
-		-
Yes		Yes
Yes (AES-NI)		Yes
-		-
32 GB SO-DIMM DDR4 (2 x 16 GB)	8 GB SO-DIMM DDR4 (1 x 8 GB)	4 GB UDIMM DDR4 (1 x 4 GB)
64 GB (2 x 32 GB)		16 GB (1 x 16 GB)
2 x SO-DIMM DDR4 Support optional ECC memory		1 x Long-DIMM DDR4
5 x 3.5-inch + 4 x 2.5-inch		12 x 3.5-inch SATA 6Gb/s, 3Gb/s
Yes		Yes
-		Optional via a PCIe adapter
Yes		Yes
-		-
2		2 (also support 10M)
Optional via the QNA-UC5G1T USB to 5GbE network adapter		-
1 x 10GBASE-T (10G/5G/2.5G/1G/100M)		2 x 10GbE SFP+
-		-
-		-
-		1 Slot 1: PCIe Gen 2 x2 PCIe bandwidth limitations will restrict the NAS 10GbE performance.
-		-
-		4
1 x Type-C USB 3.2 Gen 2 3 x Type-A USB 3.2 Gen 2		-
-		-
Tower		2U Rackmount
182.65 x 224.6 x 224.1		89 x 482 x 534
3.52		11.34
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)
External, 120 W, AC 100 to 240 V		250W (x2) PSU, 100 - 240V
55.41		83.57
1 x 140mm, 12VDC		2 x 70mm, 12VDC
Yes		-

	TS-832PXU-RP	TS-832PXU	
			
Model	TS-832PXU-RP-4G	TS-832PXU-4G	
CPU	AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor	AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor	
CPU Architecture	64-bit ARM	64-bit ARM	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes	Yes	
Hardware-accelerated Transcoding	-	-	
System Memory	4 GB UDIMM DDR4 (1 x 4 GB)	4 GB UDIMM DDR4 (1 x 4 GB)	
Maximum Memory	16 GB (1 x 16 GB)	16 GB (1 x 16 GB)	
Memory Slot	1 x Long-DIMM DDR4	1 x Long-DIMM DDR4	
Drive Bay	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 slot	Optional via a PCIe adapter	Optional via a PCIe adapter	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (also support 10M)	2 (also support 10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-	
10 Gigabit Ethernet Port	2 x 10GbE SFP+	2 x 10GbE SFP+	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	1 Slot 1: PCIe Gen 2 x2 PCIe bandwidth limitations will restrict the NAS 10GbE performance.	1 Slot 1: PCIe Gen 2 x2 PCIe bandwidth limitations will restrict the NAS 10GbE performance.	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	4	4	
USB 3.2 Gen 2 (10Gbps) Port	-	-	
HDMI Output	-	-	
Form Factor	2U Rackmount	2U Rackmount	
Dimensions (HxWxD)	89 x 482 x 534	89 x 482 x 534	
Weight (Net)	10.94	9.45	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W (x2) PSU, 100 - 240V	250W PSU, 100 - 240V	
Power Consumption: Operating Mode, Typical	69.191	56.412	
Fan	2 x 70mm, 12VDC	2 x 70mm, 12VDC	
Kensington Security Slot	-	-	





	TS-432PXU-RP	TS-432PXU
		
	TS-432PXU-RP-2G	TS-432PXU-2G
	AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor	AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor
	64-bit ARM	64-bit ARM
	-	-
	Yes	Yes
	Yes	Yes
	-	-
	2 GB UDIMM DDR4 (1 x 2 GB)	2 GB UDIMM DDR4 (1 x 2 GB)
	16 GB (1 x 16 GB)	16 GB (1 x 16 GB)
	1 x Long-DIMM DDR4	1 x Long-DIMM DDR4
	4 x 3.5" SATA 6Gb/s, 3Gb/s	4 x 3.5" SATA 6Gb/s, 3Gb/s
	Yes	Yes
	Optional via a PCIe adapter	Optional via a PCIe adapter
	Yes	Yes
	-	-
	2 (also support 10M)	2 (also support 10M)
	-	-
	2 x 10GbE SFP+	2 x 10GbE SFP+
	-	-
	-	-
	1 Slot 1: PCIe Gen 2 x2 PCIe bandwidth limitations will restrict the NAS 10GbE performance.	1 Slot 1: PCIe Gen 2 x2 PCIe bandwidth limitations will restrict the NAS 10GbE performance.
	-	-
	4	4
	-	-
	-	-
	1U Rackmount	1U Rackmount
	44 x 439 x 499	44 x 439 x 499
	8.12	6.53
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	250W (x2) PSU, 100 - 240V	250W PSU, 100 - 240V
	53.343	39.558
	2 x 40mm, 12VDC	2 x 40mm, 12VDC
	-	-



	TS-431KX	TS-431X3
		
Model	TS-431KX-2G	TS-431X3-4G
CPU	AnnapurnaLabs, an Amazon company Alpine AL214, 4-core, 1.7GHz	AnnapurnaLabs, an Amazon company Alpine AL314, 4-core, 1.7GHz
CPU Architecture	32-bit ARM	32-bit ARM
Graphic Processors	-	-
Floating Point Unit	Yes	Yes
Encryption Engine	Yes	Yes
Hardware-accelerated Transcoding	-	-
System Memory	2 GB SODIMM DDR3 (1 x 2 GB)	4 GB SODIMM DDR3 (1 x 4 GB)
Maximum Memory	8 GB (1 x 8 GB)	8 GB (1 x 8 GB)
Memory Slot	1 x SO-DIMM DDR3	1 x SO-DIMM DDR3
Drive Bay	4x 3.5-inch SATA 6Gb/s, 3Gb/s	4x 3.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes	Yes
M.2 slot	-	-
SSD Cache Acceleration Support	Yes	Yes
Gigabit Ethernet Port (RJ45)	2	1
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	1
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-
10 Gigabit Ethernet Port	1 x 10GbE SFP+	1 x 10GbE SFP+
25 Gigabit Ethernet Port	-	-
Thunderbolt Port	-	-
PCIe Slot	-	-
USB 2.0 port	-	-
USB 3.2 Gen 1 port	3	3
USB 3.2 Gen 2 (10Gbps) Port	-	-
HDMI Output	-	-
Form Factor	Tower	Tower
Dimensions (HxWxD)	169 x 160 x 219	169 x 160 x 219
Weight (Net)	2.01	2.01
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	90W Adapter, 100-240V	90W Adapter, 100-240V
Power Consumption: Operating Mode, Typical	26.7	-
Fan	1 x 120mm, 12VDC	1 x 120mm, 12VDC
Kensington Security Slot	Yes	Yes





TS-932PX		TS-832PX	
			
TS-932PX-4G		TS-832PX-4G	
AnnapurnaLabs Alpine AL324 ARM® Cortex-A57 quad-core 1.7GHz processor		AnnapurnaLabs Alpine AL324 ARM® Cortex-A57 quad-core 1.7GHz processor	
64-bit ARM		64-bit ARM	
-		-	
Yes		Yes	
Yes		Yes	
-		-	
4 GB SODIMM DDR4 (1 x 4 GB)		4 GB SODIMM DDR4(1 x 4 GB)	
16 GB (1 x 16 GB)		16 GB (1 x 16 GB)	
1 x SO-DIMM DDR4		1 x SO-DIMM DDR4	
5x 3.5-inch+ 4 x 2.5-inch SATA 6Gb/s		8 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Yes		Yes	
-		Optional via a PCIe adapter	
Yes		Yes	
-		-	
2 (also support 10M)		2 (also support 10M)	
-		-	
2 x 10GbE SFP+		2 x 10GbE SFP+	
-		-	
-		-	
-		1 Slot 1: PCIe Gen 2 x2 PCIe bandwidth limitations will restrict the NAS 10GbE performance.	
-		-	
3		3	
-		-	
-		-	
Tower		Tower	
182.7 x 224.6 x 224.1		188.2 x 329.3 x 280.8	
3.39		6.38	
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)	
External, 120 W, AC 100 to 240 V		250W, 100-240V AC, 50/60Hz, 3.5A	
-		50.858	
1 x 140mm, 12VDC		System fan: 2 x 120mm, 12VDC CPU fan: 1 x 60mm	
Yes		Yes	



	TS-431XeU		TS-i410X
			
Model	TS-431XeU-2G	TS-431XeU-8G	TS-i410X-8G
CPU	AnnapurnaLabs Alpine AL314 32-bit ARM® Cortex-A15 quad-core 1.7GHz processor		Intel® Atom® x6425E 4-core/4-thread processor, burst up to 3.0 GHz
CPU Architecture	32-bit ARM		64-bit x86
Graphic Processors	-		Intel® UHD Graphics for 10th Gen Intel® Processors
Floating Point Unit	Yes		Yes
Encryption Engine	Yes		Yes (AES-NI)
Hardware-accelerated Transcoding	-		Yes
System Memory	2 GB SODIMM DDR3 (1 x 2 GB)	8 GB SODIMM DDR3 (1 x 8 GB)	8 GB on board (non-expandable) Note: Reserves some RAM for use as shared graphics memory.
Maximum Memory	8 GB (1 x 8 GB)		8 GB on board (non-expandable)
Memory Slot	1 x SO-DIMM DDR3		-
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s		4 x 2.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes		Yes
M.2 slot	-		-
SSD Cache Acceleration Support	Yes		Yes
Gigabit Ethernet Port (RJ45)	2		-
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-		-
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		-
10 Gigabit Ethernet Port	1 x 10GbE SFP+		2 x 10GBASE-T (10G/5G/2.5G/1G)
25 Gigabit Ethernet Port	-		-
Thunderbolt Port	-		-
PCIe Slot	-		-
USB 2.0 port	-		-
USB 3.2 Gen 1 port	4		-
USB 3.2 Gen 2 (10Gbps) Port	-		4
HDMI Output	-		1, HDMI 1.4b (up to 3840 x 2160 @ 30Hz)
Form Factor	1U Rackmount		Tower
Dimensions (HxWxD)	44 x 439 x 291		65 x 180 x 254
Weight (Net)	4.15		2.54
Operating temperature	0 - 40 °C (32°F - 104°F)		-40 - 70 °C (-40°F - 158°F)
Power Supply Unit	Open-frame 100W, Input: 100V-240V ~ / 3.5A, 50Hz-60Hz		1. External Power Adapter, 90W and above, AC 100-240V 2. 9-36V DC input To avoid potential personal injury or component damage, DO NOT plug in two power inputs simultaneously.
Power Consumption: Operating Mode, Typical	30.99		-
Fan	System fan: 3 x 40mm, 12VDC		-
Kensington Security Slot	Yes		Yes





	QSW-308-1C	QSW-308S
		
Model	QSW-308-1C	QSW-308S
Management Type	Unmanaged	Unmanaged
Management Port	-	-
Power Supply Description	Adapter	Adapter
Max. Power Consumption	36W	36W
Input Power Type	AC	AC
Input Voltage Range	100-240VAC, 50/60 Hz	100-240VAC, 50/60 Hz
MAC Address Table	16K	16K
Total Non-Blocking Throughput	38Gbps	38Gbps
Switching Capacity	76Gbps	76Gbps
Management Interface	-	-
Console	-	-
Energy Efficient Ethernet (IEEE 802.3az complaint)	-	-
Fan	Fanless	Fanless
Supported Standards	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3an 10GBASE-T IEEE 802.3bz 2.5G/5G BASE-T Multi-Gig Ethernet	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3an 10GBASE-T
Number of Ports	11	11
10GbE SFP+	2 10G only Note: Compatibility issues with the Intel X520 ethernet network adapter might cause the ports to randomly switch between port up and port down status.	3 10G only Note: Compatibility issues with the Intel X520 ethernet network adapter might cause the ports to randomly switch between port up and port down status.
10GbE BASE-T (RJ45)	-	-
10GbE SFP+/RJ45 Combo Ports	1 Note1: The 10GbE SFP+ ports are not backward compatible with 1GbE SFP; the RJ45 (copper) combo port supports up to five speeds (10G/5G/2.5G/1G/100M). Note2: Compatibility issues with the Intel X520 ethernet network adapter might cause the ports to randomly switch between port up and port down status.	-
2.5GbE (RJ45)	-	-
1GbE (RJ45)	8	8
Total PoE Ports	-	-
PoE PSE (802.3af, 15.4W)	-	-
PoE+ PSE (802.3at, 30W)	-	-
PoE++ PSE (802.3bt, 90W)	-	-
PoE Power Output	-	-
Total PoE Power Budget	-	-
Form Factor	Desktop	Desktop
Dimensions (HxWxD)	42.5 x 290 x 127	42.5 x 290 x 127
Weight (Net)	0.77	0.74



	QSW-M2106-4C	QSW-M2106-4S
		
Model	QSW-M2106-4C	QSW-M2106-4S
Management Type	Web Managed	Web Managed
Management Port		
Power Supply Description	Adapter	Adapter
Max. Power Consumption	36W	16W
Input Power Type	DC	DC
Input Voltage Range	12V/3A	12V/3A
MAC Address Table	16K	16K
Total Non-Blocking Throughput	55Gbps	55Gbps
Switching Capacity	110Gbps	110Gbps
Management Interface	Web	Web
Console	RJ45	RJ45
Energy Efficient Ethernet (IEEE 802.3az complaint)	Yes	Yes
Fan	PWM double ball bearing fan x 1	PWM double ball bearing fan x 1
Supported Standards	"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)"	"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service"
Number of Ports	10	10
10GbE SFP+	-	4
10GbE BASE-T (RJ45)	-	-
10GbE SFP+/RJ45 Combo Ports	4	-
2.5GbE (RJ45)	6	6
1GbE (RJ45)	-	-
Total PoE Ports	-	-
PoE PSE (802.3af, 15.4W)	-	-
PoE+ PSE (802.3at, 30W)	-	-
PoE++ PSE (802.3bt, 90W)	-	-
PoE Power Output	-	-
Total PoE Power Budget	-	-
Form Factor	Desktop	Desktop
Dimensions (HxWxD)	42.5 x 290 x 127	42.5 x 290 x 127






QSW-M2106R-2S2T		QSW-M2106PR-2S2T	
			
QSW-M2106R-2S2T		QSW-M2106PR-2S2T	
Web Managed		Web Managed	
Internal Power Supply Unit		Adapter	
40W		350W	
AC		AC	
100-240VAC, 50/60 Hz		100-240VAC, 50/60 Hz	
16K		16K	
55Gbps		55Gbps	
110Gbps		110Gbps	
Web		Web	
RJ45		RJ45	
Yes		Yes	
PWM VAPO Bearing fan x 2		PWM VAPO Bearing fan x 2	
"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service"		"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3an 10G BASE-T IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af/at/bt Power-over-Ethernet (PoE)"	
10		10	
2		2	
2		2	
-		-	
6		6	
-		-	
-		8	
-		port 1~8	
-		port 1~8	
-		port 1~8	
-		port 1~8 (90W)	
-		310W	
Rackmount		Rackmount	
43.3 x 207 x 248.8		43.3 x 207 x 248.8	



	QSW-M1208-8C	QSW-M1204-4C
		
Model	QSW-M1208-8C	QSW-M1204-4C
Management Type	Web Managed	Web Managed
Management Port	1 x 1GbE RJ45	1 x 1GbE RJ45
Power Supply Description	Internal Power Supply Unit	Internal Power Supply Unit
Max. Power Consumption	70W	70W
Input Power Type	AC	AC
Input Voltage Range	100-240VAC, 50/60Hz	100-240VAC, 50/60Hz
MAC Address Table	16K	16K
Total Non-Blocking Throughput	120Gbps	120Gbps
Switching Capacity	240Gbps	240Gbps
Management Interface	Web	Web
Console	RS232	RS232
Energy Efficient Ethernet (IEEE 802.3az complaint)	Yes	Yes
Fan	System: 4 x 4 cm (12V)	System: 4 x 4 cm (12V)
Supported Standards	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)
Number of Ports	12	12
10GbE SFP+	4	8
10GbE BASE-T (RJ45)	-	-
10GbE SFP+/RJ45 Combo Ports	8 Note: The 10GbE SFP+ ports are backward compatible with 1GbE SFP; the RJ45 (copper) combo port supports up to five speeds (10G/5G/2.5G/1G/100M).	4 Note: The 10GbE SFP+ ports are backward compatible with 1GbE SFP; the RJ45 (copper) combo port supports up to five speeds (10G/5G/2.5G/1G/100M).
2.5GbE (RJ45)	-	-
1GbE (RJ45)	-	-
Total PoE Ports	-	-
PoE PSE (802.3af, 15.4W)	-	-
PoE+ PSE (802.3at, 30W)	-	-
PoE++ PSE (802.3bt, 90W)	-	-
PoE Power Output	-	-
Total PoE Power Budget	-	-
Form Factor	-	-
Dimensions (HxWxD)	46.65 x 285 x 236.6	46.65 x 285 x 236.6
Weight (Net)	2.2	2.16





QSW-M804-4C		QSW-1208-8C	
			
QSW-M804-4C		QSW-1208-8C	
Web Managed		Unmanaged	
1 x 1GbE RJ45		-	
Internal Power Supply Unit		Internal Open Frame	
70W		50W	
AC		AC	
100-240VAC, 50/60Hz		100-240VAC, 50/60 Hz	
16K		27K	
80Gbps		120Gbps	
160Gbps		240Gbps	
Web		-	
RS232		-	
Yes		Yes	
System: 4 x 4 cm (12V)		System: 2 x 4 cm (12V DC)	
IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)		IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5G BASE-T Multi-Gig Ethernet IEEE 802.3an 10GBASE-T 10G Ethernet IEEE 802.3ae 10GBASE-SR IEEE 802.3ae 10GBASE-LR IEEE 802.3x Full-duplex flow control IEEE 802.3az Energy Efficient Ethernet	
8		12	
4		4 10G/1G	
-		-	
4		8	
Note: The 10GbE SFP+ ports are backward compatible with 1GbE SFP; the RJ45 (copper) combo port supports up to five speeds (10G/5G/2.5G/1G/100M).		Note: The 10GbE SFP+ ports are backward compatible with 1GbE SFP; the RJ45 (copper) combo port supports up to five speeds (10G/5G/2.5G/1G/100M).	
-		-	
-		-	
-		-	
-		-	
-		-	
-		-	
-		-	
-		-	
-		Desktop	
46.65 x 285 x 236.6		43 x 285 x 233	
2.12		2.15	



	QSW-2104-2T	QSW-2104-2S
		
Model	QSW-2104-2T	QSW-2104-2S
Management Type	Unmanaged	Unmanaged
Management Port	-	-
Power Supply Description	Adapter	Adapter
Max. Power Consumption	12W	12W
Input Power Type	DC	DC
Input Voltage Range	12V/1A	12V/1A
MAC Address Table	16K	16K
Total Non-Blocking Throughput	30Gbps	30Gbps
Switching Capacity	60Gbps	60Gbps
Management Interface	-	-
Console	-	-
Energy Efficient Ethernet (IEEE 802.3az complaint)	Yes	Yes
Fan	-	-
Supported Standards	IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10GBase-T IEEE 802.3az Energy Efficient Ethernet (EEE)IEEE	IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10GBase-T IEEE 802.3az Energy Efficient Ethernet (EEE)IEEE SFP Transceiver 1000BASE-SX SFP Transceiver 1000BASE-LX SFP Transceiver 1000BASE-T Copper RJ45 GBIC
Number of Ports	6	6
10GbE SFP+	-	2
10GbE BASE-T (RJ45)	2	-
10GbE SFP+/RJ45 Combo Ports	-	-
2.5GbE (RJ45)	4	4
1GbE (RJ45)	-	-
Total PoE Ports	-	-
PoE PSE (802.3af, 15.4W)	-	-
PoE+ PSE (802.3at, 30W)	-	-
PoE++ PSE (802.3bt, 90W)	-	-
PoE Power Output	-	-
Total PoE Power Budget	-	-
Form Factor	Desktop	Desktop
Dimensions (HxWxD)	34 x 180 x145	34 x 180 x145
Weight (Net)	0.722	0.713





QSW-M408-4C		QSW-M408-2C	
			
QSW-M408-4C		QSW-M408-2C	
Web Managed		Web Managed	
-		-	
Adapter		Adapter	
31.46 W		22.04 W	
AC		AC	
100-240VAC, 50/60 Hz		100-240VAC, 50/60 Hz	
16K		16K	
48Gbps		48Gbps	
96Gbps		96Gbps	
Web		Web	
RJ45		RJ45	
Yes		Yes	
PWM double ball bearing fan x 1		PWM double ball bearing fan x 1	
IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service		IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service	
12		12	
-		2 10G/1G	
-		-	
4		2	
Note: The 10GbE SFP+ ports are backward compatible with 1GbE SFP; the RJ45 (copper) combo port supports up to five speeds (10G/5G/2.5G/1G/100M).		Note: The 10GbE SFP+ ports are backward compatible with 1GbE SFP; the RJ45 (copper) combo port supports up to five speeds (10G/5G/2.5G/1G/100M).	
-		-	
8		8	
-		-	
-		-	
-		-	
-		-	
-		-	
-		-	
Desktop		Desktop	
42.5 x 290 x 127		42.5 x 290 x 127	
1.15		1.15	


	QSW-M408S	QSW-M2108-2C
		
Model	QSW-M408S	QSW-M2108-2C
Management Type	Web Managed	Web Managed
Management Port	-	-
Power Supply Description	Adapter	Adapter
Max. Power Consumption	12.17 W	12.17 W
Input Power Type	AC	DC
Input Voltage Range	100-240VAC, 50/60 Hz	12V
MAC Address Table	16K	16K
Total Non-Blocking Throughput	48Gbps	40Gbps
Switching Capacity	96Gbps	80Gbps
Management Interface	Web	Web
Console	RJ45	RJ45
Energy Efficient Ethernet (IEEE 802.3az complaint)	Yes	Yes
Fan	PWM double ball bearing fan x 1	PWM double ball bearing fan x 1
Supported Standards	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)
Number of Ports	12	10
10GbE SFP+	4 10G/1G	-
10GbE BASE-T (RJ45)	-	-
10GbE SFP+/RJ45 Combo Ports	-	2
2.5GbE (RJ45)	-	8
1GbE (RJ45)	8	-
Total PoE Ports	-	-
PoE PSE (802.3af, 15.4W)	-	-
PoE+ PSE (802.3at, 30W)	-	-
PoE++ PSE (802.3bt, 90W)	-	-
PoE Power Output	-	-
Total PoE Power Budget	-	-
Form Factor	Desktop	Desktop
Dimensions (HxWxD)	42.5 x 290 x 127	42.5 x 290 x 127
Weight (Net)	1.145	1.12



QSW-M2108R-2C		QSW-M2116P-2T2S	
			
QSW-M2108R-2C		QSW-M2116P-2T2S	
Web Managed		Web Managed	
-		-	
Internal Power Supply Unit		Internal Power Supply Unit	
60W		350W	
AC		AC	
100-240VAC, 50/60 Hz		100-240VAC, 50/60 Hz	
16K		32K	
40Gbps		80Gbps	
80Gbps		160Gbps	
Web		Web	
RJ45		RJ45	
Yes		Yes	
PWM double ball bearing fan x 1		PWM double ball bearing fan x 2	
IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)		IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3an 10G BASE-T IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af/at/bt Power-over-Ethernet (PoE)	
10		20	
-		2	
-		2	
2		-	
8		16	
-		-	
-		18	
-		Port 1-16	
-		Port 1-16	
-		Port 19-20	
-		Port 1-16 (30W), Port 19-20 (90W)	
-		280W	
Desktop		Rackmount	
43.3 x 207 x 199.5		43.5 x 285 x 234.8	
1.2		2.08	





	QSW-IM1200-8C
	
Model	QSW-IM1200-8C
Management Type	Web Managed
Management Port	1 x 1GbE RJ45
Power Supply Description	Adapter
Max. Power Consumption	67W
Input Power Type	DC
Input Voltage Range	9V-54V
MAC Address Table	16K
Total Non-Blocking Throughput	120Gbps
Switching Capacity	240Gbps
Management Interface	Web
Console	RS232
Energy Efficient Ethernet (IEEE 802.3az compliant)	Yes
Fan	-
Supported Standards	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)
Number of Ports	12
10GbE SFP+	4
10GbE BASE-T (RJ45)	-
10GbE SFP+/RJ45 Combo Ports	8
2.5GbE (RJ45)	-
1GbE (RJ45)	-
Total PoE Ports	-
PoE PSE (802.3af, 15.4W)	-
PoE+ PSE (802.3at, 30W)	-
PoE++ PSE (802.3bt, 90W)	-
PoE Power Output	-
Total PoE Power Budget	-
Form Factor	Rackmount
Dimensions (HxWxD)	43.5 x 285 x 238
Weight (Net)	4.58






2.5GbE Solution




2.5GbE is not just
for offices,
but also for homes






	TVS-h474	TVS-h674	
			
Model	TVS-h474-PT-8G	TVS-h674-i5-32G	TVS-h674-i3-16G
CPU	Intel® Pentium™ Gold G7400 2-core/ 4-thread 3.7 GHz Processor	Intel® Core™ i5-12400 6-core/ 12-thread Processor, burst up to 4.4 GHz	Intel® Core™ i3-12100 4-core/ 8-thread Processor, burst up to 4.3 GHz
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	Intel® UHD Graphics 710	Intel® UHD Graphics 770	Intel® UHD Graphics 730
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	Yes	
System Memory	8 GB SODIMM DDR4 (1 x 8 GB)	32 GB SODIMM DDR4 (2 x 16 GB)	16 GB SODIMM DDR4 (1 x 16 GB)
Maximum Memory	128 GB (2 x 64 GB)	128 GB (2 x 64 GB)	
Memory Slot	2 x SODIMM DDR4	2 x SODIMM DDR4	
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s	6 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 Slot	2 x M.2 2280 PCIe Gen3 x2 slots	2 x M.2 2280 PCIe Gen4 x4 slots	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-	
10 Gigabit Ethernet Port	-	-	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 3 x2 (PCH)	2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 4 x4 (PCH)	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	-	-	
USB 3.2 Gen 2 (10Gbps) port	1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	
HDMI Output	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	
Form Factor	Tower	Tower	
Dimensions (HxWxD)	188.2 x 199.3 x 279.6	188.2 x 264.3 x 279.6	
Weight (Net)	-	6.553	
Operating Temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W, 100-240V	250W, 100-240V	
Power Consumption: Operating Mode, Typical	-	45.6	
Fan	System fan: 1 x 120mm, 12VDC CPU fan: 1 x 60mm, 12VDC	System fan: 2 x 92mm, 12VDC CPU fan: 1 x 60mm, 12VDC	
Kensington Security Slot	Yes	Yes	





	TVS-h874	TS-253E	TS-453E
			
	TVS-h874-i5-32G	TS-253E-8G	TS-453E-8G
	Intel® Core™ i5-12400 6-core/ 12-thread Processor, burst up to 4.4 GHz	Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz	Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz
	64-bit x86	64-bit x86	64-bit x86
	Intel® UHD Graphics 770	Intel® UHD Graphics	Intel® UHD Graphics
	Yes	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)	Yes (AES-NI)
	Yes	Yes	Yes
	32 GB SODIMM DDR4 (2 x 16 GB)	8 GB on board (non-expandable)	8 GB on board (non-expandable)
	128 GB (2 x 64 GB)	8GB	8GB
	2 x SODIMM DDR4	-	-
	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	2 x 3.5-inch SATA 6Gb/s	4 x 3.5-inch SATA 6Gb/s
	Yes	Yes	Yes
	2 x M.2 2280 PCIe Gen4 x4 slots	2 x M.2 2280 PCIe Gen 3 x2	2 x M.2 2280 PCIe Gen 3 x2
	Yes	Yes	Yes
	-	-	-
	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)
	-	-	-
	-	-	-
	-	-	-
	-	-	-
	2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 4 x4 (PCH)	-	-
	-	2	2
	-	-	-
	1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	2 x Type-A	2 x Type-A
	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	2 x HDMI 1.4b (up to 3840 x 2160 @ 30Hz)	2 x HDMI 1.4b (up to 3840 x 2160 @ 30Hz)
	Tower	Tower	Tower
	188.2 x 329.3 x 279.6	168.5 x 102 x 225	177 x 180 x 235
	7.06	1.28	3
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	250W, 100-240V	60W/65W adapter, 100-240V	90W adapter, 100-240V
	65.03	18.09	33.88
	System fan: 2 x 120mm, 12VDC CPU fan: 1 x 60mm, 12VDC	1 x 70mm, 12VDC	1 x 120mm, 12VDC
	Yes	Yes	Yes



	TS-410E	TS-262	TS-462	
				
Model	TS-410E-8G	TS-262-4G	TS-462-2G	
CPU	Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz	Intel® Celeron® N4505 2-core/ 2-thread processor, burst up to 2.9 GHz	Intel® Celeron® N4505 2-core/ 2-thread processor, burst up to 2.9 GHz	
CPU Architecture	64-bit x86	64-bit x86	64-bit x86	
Graphic Processors	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel® UHD Graphics	Intel® UHD Graphics	
Floating Point Unit	Yes	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	Yes	Yes	
System Memory	8 GB on board (non-expandable)	4 GB on board (non-expandable)	2 GB SODIMM DDR4 (1 x 2 GB)	
Maximum Memory	8 GB on board (non-expandable)	4 GB	16 GB (2 x 8GB)	
Memory Slot	-	-	2 x SODIMM DDR4	
Drive Bay	4 x 2.5-inch SATA 6Gb/s, 3Gb/s	2 x 3.5-inch SATA 6Gb/s	4 x 3.5-inch SATA 6Gb/s	
Hot-swappable	Yes	Yes	Yes	
M.2 Slot	-	2 x M.2 2280 PCIe Gen 3 x1	2 x M.2 2280 PCIe Gen 3 x1	
SSD Cache Acceleration Support	Yes	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M/10M)	1 (2.5G/1G/100M/10M)	1 (2.5G/1G/100M/10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-	-	
10 Gigabit Ethernet Port	-	-	-	
25 Gigabit Ethernet Port	-	-	-	
Thunderbolt Port	-	-	-	
PCIe Slot	-	1 Slot 1: PCIe Gen 3 x2	1 Slot 1: PCIe Gen 3 x2	
USB 2.0 port	-	2	2	
USB 3.2 Gen 1 port	-	-	-	
USB 3.2 Gen 2 (10Gbps) port	4	2 x Type-A	2 x Type-A	
HDMI Output	1, HDMI 1.4b (up to 3840 x 2160 @ 30Hz)	1, HDMI 2.0	1, HDMI 2.0	
Form Factor	Tower	Tower	Tower	
Dimensions (HxWxD)	60 x 180 x 254	168 x 105 x 226	168 x 170 x 226	
Weight (Net)	2.64	1.55	2.26	
Operating Temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	External Power Adapter, 90W and above, AC 100- 240V	65W adapter, 100-240V	90W adapter, 100-240V	
Power Consumption: Operating Mode, Typical	-	12.448	25.98	
Fan	-	1 x 70mm, 12VDC	1 x 120mm, 12VDC	
Kensington Security Slot	Yes	Yes	Yes	





	TS-264	TS-464	TS-664
			
	TS-264-8G	TS-464-4G	TS-664-4G
	Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz	Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz	Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz
	64-bit x86	64-bit x86	64-bit x86
	Intel® UHD Graphics	Intel® UHD Graphics	Intel® UHD Graphics
	Yes	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)	Yes (AES-NI)
	Yes	Yes	Yes
	8 GB on board (non-expandable)	4 GB SODIMM DDR4 (1 x 4 GB)	4 GB SODIMM DDR4 (1 x 4 GB)
	8 GB	16 GB (2 x 8GB)	16 GB (2 x 8GB)
	-	2 x SODIMM DDR4	2 x SODIMM DDR4
	2 x 3.5-inch SATA 6Gb/s	4 x 3.5-inch SATA 6Gb/s	6 x 3.5-inch SATA 6Gb/s
	Yes	Yes	Yes
	2 x M.2 2280 PCIe Gen 3 x1	2 x M.2 2280 PCIe Gen 3 x1	2 x M.2 2280 PCIe Gen 3 x1
	Yes	Yes	Yes
	-	-	-
	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)
	-	-	-
	-	-	-
	-	-	-
	-	-	-
	1 Slot 1: PCIe Gen 3 x2	1 Slot 1: PCIe Gen 3 x2	1 Slot 1: PCIe Gen 3 x2
	2	2	2
	-	-	-
	2 x Type-A	2 x Type-A	2 x Type-A
	1, HDMI 2.0	1, HDMI 2.0	1, HDMI 2.0
	Tower	Tower	Tower
	168 x 105 x 226	168 x 170 x 226	168 x 235 x 226
	1.55	2.26	2.9
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	0 ~ 40°C (32°F ~ 104°F)
	65W adapter, 100-240V	90W adapter, 100-240V	120W adapter, 100-240V
	12.448	-	35.437
	1 x 70mm, 12VDC	1 x 120mm, 12VDC	2 x 90mm, 12VDC
	Yes	Yes	Yes



	TS-h686	TS-h886	
			
Model	TS-h686-D1602-8G	TS-h886-D1622-16G	
CPU	Intel® Xeon® D-1602 2-core/4-thread processor, up to 3.2 GHz	Intel® Xeon® D-1622 4-core/8-thread processor, up to 3.2 GHz	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	Yes	
System Memory	8 GB UDIMM DDR4 ECC (2 x 4 GB)	16 GB UDIMM DDR4 ECC (2 x 8 GB)	
Maximum Memory	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4	
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s + 2 x 2.5-inch SATA 6Gb/s, 3Gb/s	6 x 3.5-inch SATA 6Gb/s, 3Gb/s + 2 x 2.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 slot	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4 (also support 10M)	4 (also support 10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via an adapter	Optional via an adapter	
10 Gigabit Ethernet Port	-	-	
25 Gigabit Ethernet Port	Optional via an adapter	Optional via an adapter	
Thunderbolt Port	-	-	
PCIe Slot	2 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x8	2 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x8	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	3	3	
USB 3.2 Gen 2 (10Gbps) Port	-	-	
HDMI Output	-	-	
Form Factor	Tower	Tower	
Dimensions (HxWxD)	231.9 x 224.9 x 319.8	231.9 x 292.9 x 319.8	
Weight (Net)	7.27	8.5	
Operating temperature	0 - 40°C (32°F - 104°F)	0 - 40°C (32°F - 104°F)	
Power Supply Unit	250W PSU, 100~240V	250W PSU, 100~240V	
Power Consumption: Operating Mode, Typical	61.115	75.79	
Fan	System fan: 1 x 97mm, 12VDC CPU fan: 1 x 90mm, 12VDC	System fan: 2 x 80mm, 12VDC CPU fan: 1 x 90mm, 12VDC	
Kensington Security Slot	Yes	Yes	





TS-364	HS-264
	
TS-364-4G	HS-264
Intel® Celeron® N5105/N5095/N5095A 4-core/ 4-thread processor, burst up to 2.9 GHz	Intel Celeron N5105 4 core 2.0GHz, burst up to 2.9GHz
64-bit x86	64-bit x86
Intel® UHD Graphics	Intel® UHD Graphics
Yes	Yes
Yes (AES-NI)	Yes (AES-NI)
Yes	Yes
4 GB SODIMM DDR4 (1 x 4 GB)	8 GB DDR4, not expandable
16 GB (2 x 8 GB)	8 GB DDR4, not expandable
2 x SO-DIMM DDR4	-
3 x 3.5-inch SATA 6Gb/s, 3Gb/s	2 x 3.5-inch SATA 6Gb/s, 3Gb/s
Yes	Yes
2 x M.2 2280 PCIe Gen 3 x2 slots	-
Yes	Yes
-	-
1	2 (also support 10M)
Optional via an adapter	-
-	-
-	-
-	-
-	-
-	-
1	2 x Type A
2 x Type-A	2 x Type A
1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	2 x HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz)
Tower	Tower
142 x 150 x 260	41.3 x 302 x 220
1.64	1.56
0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
65W adapter, 100 - 240V	60W adapter, 100-240V
-	-
1 x 92mm, 12VDC	-
Yes	Yes



	TBS-464	TVS-675	
			
Model	TBS-464-8G	TVS-675-8G	
CPU	Intel® Celeron® N5105 4-core/4-thread processor, burst up to 2.9GHz	ZhaoXin KX-U6580 8-core 2.5GHz processor	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	Intel® UHD Graphics	ZhaoXin C-960 Graphics	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	Yes	
System Memory	8 GB DDR4, not expandable	8 GB SODIMM DDR4 (1 x 8 GB)	
Maximum Memory	8 GB DDR4, not expandable	64 GB (2 x 32 GB)	
Memory Slot	-	2 x SO-DIMM DDR4	
Drive Bay	-	6 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	-	Yes	
M.2 slot	4 x M.2 2280 NVMe Gen3 x2 slots	2 x M.2 2280 PCIe Gen 3 x1 or SATA 6Gb/s slots	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (also support 10M)	2	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	Optional via an adapter	
10 Gigabit Ethernet Port	-	Optional via an adapter	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	-	2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4	
USB 2.0 port	3	-	
USB 3.2 Gen 1 port	2	2	
USB 3.2 Gen 2 (10Gbps) Port	-	2 x Type-A	
HDMI Output	2, HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz)	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)	
Form Factor	Set-top design	Tower	
Dimensions (HxWxD)	30 x 230 x 165	188.2 x 263.9 x 280.8	
Weight (Net)	0.8	6.2	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	External Power Adapter, 65W, 100-240V	250W, 100-240V AC, 50/60Hz, 3.5A	
Power Consumption: Operating Mode, Typical	16.52	'60.794	
Fan	1 x system fan	3 x 80mm, 12VDC	
Kensington Security Slot	Yes	Yes	






TS-873A		TS-673A	
			
TS-873A-8G		TS-673A-8G	
AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor		AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	
64-bit x86		64-bit x86	
Optional via a PCIe adapter		Optional via a PCIe adapter	
Yes		Yes	
Yes (AES-NI)		Yes (AES-NI)	
Optional via a PCIe adapter		Optional via a PCIe adapter	
8 GB SO-DIMM DDR4 (1 x 8 GB)		8 GB SO-DIMM DDR4 (1 x 8 GB)	
64GB (2 x 32 GB)		64GB (2 x 32 GB)	
2 x SO-DIMM DDR4 Support ECC memory		2 x SO-DIMM DDR4 Support ECC memory	
8 x 3.5-inch SATA 6Gb/s, 3Gb/s		6 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.		Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.	
2 x M.2 2280 PCIe Gen3 x1 slots		2 x M.2 2280 PCIe Gen3 x1 slots	
Yes		Yes	
-		-	
2		2	
Optional via a PCIe adapter		Optional via a PCIe adapter	
Optional via a PCIe adapter		Optional via a PCIe adapter	
-		-	
-		-	
2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4		2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4	
-		-	
-		-	
3 x Type-A USB 3.2 Gen 2 10Gbps 1 x Type-C USB 3.2 Gen 1 5Gbps		3 x Type-A USB 3.2 Gen 2 10Gbps 1 x Type-C USB 3.2 Gen 1 5Gbps	
Optional via a PCIe adapter		Optional via a PCIe adapter	
Tower		Tower	
188.2 x 329.3 x 280.8		188.2 x 264.3 x 280.8	
6.76		5.78	
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)	
250W, 100-240V AC, 50-60Hz, 3.5A		250W, 100-240V AC, 50-60Hz, 3.5A	
54.067		45.898	
System fan: 2 x 120mm		System fan: 2 x 92mm	
Yes		Yes	



	TS-473A	TS-431P3	
			
Model	TS-473A-8G	TS-431P3-4G	
CPU	AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	AnnapurnaLabs, an Amazon company Alpine AL314, 4-core, 1.7GHz	
CPU Architecture	64-bit x86	32-bit ARM	
Graphic Processors	Optional via a PCIe adapter	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes	
Hardware-accelerated Transcoding	Optional via a PCIe adapter	-	
System Memory	8 GB SO-DIMM DDR4 (1 x 8 GB)	4GB SO-DIMM DDR3	
Maximum Memory	64 GB (2 x 32 GB)	8GB DDR3	
Memory Slot	2 x SO-DIMM DDR4 Support ECC memory	1 x SO-DIMM DDR3	
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s	4x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.	Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.	
M.2 slot	2 x M.2 2280 PCIe Gen3 x1 slots	-	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	1	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2	1	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via a PCIe adapter	-	
10 Gigabit Ethernet Port	Optional via a PCIe adapter	-	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4	2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	-	3	
USB 3.2 Gen 2 (10Gbps) Port	3 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps 1 x Type-C USB 3.2 Gen 1 5V/1A 5Gbps	-	
HDMI Output	Optional via a PCIe adapter	-	
Form Factor	Tower	Tower	
Dimensions (HxWxD)	188.2 x 199.3 x 280.8	169 x 160 x 219	
Weight (Net)	5.03	2.01	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W, 100-240V AC, 50-60Hz, 3.5A	90W Adapter, 100-240V	
Power Consumption: Operating Mode, Typical	29.792	26.7	
Fan	System fan: 1 x 120mm CPU fan: 1 x 60mm	1 x 120mm, 12VDC	
Kensington Security Slot	-	Yes	






TS-431P3		TS-231P3	
			
TS-431P3-2G		TS-231P3-4G	TS-231P3-2G
AnnapurnaLabs, an Amazon company Alpine AL314, 4-core, 1.7GHz		AnnapurnaLabs, an Amazon company Alpine AL314, 4-core, 1.7GHz	
32-bit ARM		32-bit ARM	
-		-	
Yes		Yes	
Yes		Yes	
-		-	
2GB SO-DIMM DDR3		4GB SO-DIMM DDR3	2GB SO-DIMM DDR3
8GB DDR3		8GB DDR3	
1 x SO-DIMM DDR3		1 x SO-DIMM DDR3	
4x 3.5-inch SATA 6Gb/s, 3Gb/s		2 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Yes		Yes	
-		-	
Yes		Yes	
1		1	
1		1	
-		-	
-		-	
-		-	
-		-	
-		-	
3		3	
-		-	
-		-	
Tower		Tower	
169 x 160 x 219		169 x 102 x 219	
2.01		1.46	
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)	
90W Adapter, 100-240V		60W/65W Adapter, 100-240V	
26.7		15.6	
1 x 120mm, 12VDC		1 x 70mm, 12VDC	
Yes		Yes	




	TS-h987XU-RP	TS-h1887XU-RP	
			
Model	TS-h987XU-RP-E2334-16G	TS-h1887XU-RP-E2334-16G	TS-h1887XU-RP-E2336-32G
CPU	Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz	Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz	Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	-	-	
System Memory	16 GB ECC DDR4 (1 x 16 GB)	16 GB ECC DDR4 (1 x 16 GB)	32 GB ECC DDR4 (2 x 16 GB)
Maximum Memory	128GB (4 x 32 GB)	128GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4	
Drive Bay	9 (4 x 3.5-inch SATA + 5 x 2.5-inch U.2 PCIe / SATA) 2.5-inch bays: #1: PCIe Gen3 x2 & SATA 6Gbps #2: PCIe Gen3 x2 & SATA 6Gbps #3: PCIe Gen3 x2 & SATA 6Gbps #4: PCIe Gen4 x4 & SATA 6Gbps #5: PCIe Gen4 x4 & SATA 6Gbps	18 (12 x 3.5-inch SATA + 6 x 2.5-inch SATA)	
Hot-swappable	-	-	
M.2 Slot	Optional via a QM2 PCIe adapter	Optional via a QM2 PCIe adapter	Optional via a QM2 PCIe adapter
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M)	2 (2.5G/1G/100M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)			
10 Gigabit Ethernet Port	2 x 10GBASE-T (10G/5G/2.5G/1G/100M)	2 x 10GBASE-T (10G/5G/2.5G/1G/100M)	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	1 x Gen4 x8	3 (2 x Gen4 x4 + 1 x Gen 4 x8)	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	-	-	
USB 3.2 Gen 2 (10Gbps) port	4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps	4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps	
HDMI Output	-	-	
Form Factor	1U Rackmount	2U Rackmount	
Dimensions (HxWxD)	43.3 x 430 x 479	88 x 483 x 630	
Weight (Net)	8.43	13	
Operating Temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	-	-	
Power Consumption: Operating Mode, Typical	-	-	
Fan	4 x 40mm, 12VDC	4 x 60mm, 12VDC	
Kensington Security Slot	-	-	





TS-h2287XU-RP		TS-h3087XU-RP
		
TS-h2287XU-RP-E2336-32G	TS-h2287XU-RP-E2378-64G	TS-h3087XU-RP-E2378-64G
Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz	Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz	Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz
64-bit x86		64-bit x86
-		-
Yes		Yes
Yes (AES-NI)		Yes (AES-NI)
-		-
32 GB ECC DDR4 (2 x 16 GB)	64 GB ECC DDR4 (4 x 16 GB)	64 GB ECC DDR4 (4 x 16 GB)
128GB (4 x 32 GB)		128GB (4 x 32 GB)
4 x Long-DIMM DDR4		4 x Long-DIMM DDR4
22 (16 x 3.5-inch SATA + 6 x 2.5-inch SATA)		30 (24 x 3.5-inch SATA + 6 x 2.5-inch SATA)
-		-
Optional via a QM2 PCIe adapter		Optional via a QM2 PCIe adapter
Yes		Yes
-		-
2 (2.5G/1G/100M)		2 (2.5G/1G/100M)
2 x 10GBASE-T (10G/5G/2,5G/1G/100M)		2 x 10GBASE-T (10G/5G/2,5G/1G/100M)
-		-
-		-
3 (2 x Gen4 x4 +1 x Gen 4 x8)		3 (2 x Gen4 x4 +1 x Gen 4 x8)
-		-
-		-
4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps		4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps
-		-
3U Rackmount		4U Rackmount
133 x 483 x 630		178 x 483 x 630
15.64		21.78
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)
-		-
-		-
3 x 60mm + 1 x 80mm, 12VDC		4 x 80mm, 12VDC
-		-



	TS-464U		TS-464U-RP		
					
Model	TS-464U-8G	TS-464U-4G	TS-464U-RP-8G	TS-464U-RP-4G	
CPU	Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz		Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz		
CPU Architecture	64-bit x86		64-bit x86		
Graphic Processors	Intel® UHD Graphics		Intel® UHD Graphics		
Floating Point Unit	Yes		Yes		
Encryption Engine	Yes (AES-NI)		Yes (AES-NI)		
Hardware-accelerated Transcoding	Yes		Yes		
System Memory	8 GB on board (non-expandable)	4 GB SODIMM DDR4 (1 x 4 GB)	8 GB on board (non-expandable)	4 GB SODIMM DDR4 (1 x 4 GB)	
Maximum Memory	8 GB	16 GB (2 x 8 GB)	8 GB	16 GB (2 x 8 GB)	
Memory Slot	-	2 x SODIMM DDR4	2 x SODIMM DDR4		
Drive Bay	4 x 3.5-inch SATA 6Gb/s, 3Gb/s		4 x 3.5-inch SATA 6Gb/s, 3Gb/s		
Hot-swappable	Yes		Yes		
M.2 Slot	Optional via a PCIe adapter		Optional via a PCIe adapter		
SSD Cache Acceleration Support	Yes		Yes		
Gigabit Ethernet Port (RJ45)	-		-		
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (2.5G/1G/100M/10M)		2 (2.5G/1G/100M/10M)		
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-		-		
10 Gigabit Ethernet Port	-		-		
25 Gigabit Ethernet Port	-		-		
Thunderbolt Port	-		-		
PCIe Slot	1 Slot 1: PCIe Gen 3 x2		1 Slot 1: PCIe Gen 3 x2		
USB 2.0 port	2		2		
USB 3.2 Gen 1 port	-		-		
USB 3.2 Gen 2 (10Gbps) port	2 x Type A USB3.2 Gen2		2 x Type A USB 3.2 Gen 2		
HDMI Output	1, HDMI 1.4b		1, HDMI 1.4b		
Form Factor	1U Rackmount		1U Rackmount		
Dimensions (HxWxD)	43.3 x 482.6 x 483.9		43.3 x 430 x 479		
Weight (Net)	6.6		8.12		
Operating Temperature	0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)		
Power Supply Unit	250W (x1), 100-240V		250W (x2), 100-240V		
Power Consumption: Operating Mode, Typical	36.81		51.404		
Fan	2 x 40mm, 12VDC		2 x 40mm, 12VDC		
Kensington Security Slot	-		-		





	TS-464eU	TS-864eU	TS-1264U-RP
			
	TS-464eU-4G	TS-864eU-4G	TS-1264U-RP-4G
	Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz	Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz	Intel® Celeron® N5105/N5095 4-core/ 4-thread processor, burst up to 2.9 GHz
	64-bit x86	64-bit x86	64-bit x86
	Intel® UHD Graphics	Intel® UHD Graphics	Intel® UHD Graphics
	Yes	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)	Yes (AES-NI)
	Yes	Yes	Yes
	4 GB SODIMM DDR4 (1 x 4 GB)	4 GB SODIMM DDR4 (1 x 4 GB)	4 GB SODIMM DDR4 (1 x 4 GB)
	16 GB (2 x 8 GB)	16 GB (2 x 8 GB)	16 GB (2 x 8 GB)
	2 x SODIMM DDR4	-	-
	4 x 3.5-inch SATA 6Gb/s, 3Gb/s	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	12 x 3.5-inch SATA 6Gb/s, 3Gb/s
	Yes	Yes	Yes
	2 x M.2 2280 PCIe Gen 3 x1 slots	Optional via a PCIe adapter	Optional via a PCIe adapter
	Yes	Yes	Yes
	-	-	-
	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)	2 (2.5G/1G/100M/10M)
	-	-	-
	-	-	-
	-	-	-
	-	-	-
	-	1 Slot 1: PCIe Gen 3 x2	1 Slot 1: PCIe Gen 3 x2
	2	2	2
	-	-	-
	2 x Type A USB 3.2 Gen 2	2 x Type A USB 3.2 Gen 2	2 x Type A USB3.2 Gen2
	1, HDMI 1.4b	1, HDMI 1.4b	1, HDMI 1.4b
	1U Rackmount	2U Rackmount	2U Rackmount
	43.3 x 482.6 x 321.33	88.6 x 482.14 x 318.13	88.7 x 482.2 x 423.8
	4.35	6.68	9.43
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	100W PSU, 100-240V	300W, 100-240V	300W (x2), 100-240V
	35.297	51.022	70.913
	3 x 40mm	3 x 60mm, 12VDC	2 x 80mm, 12VDC
	-	-	-



	TS-1273AU-RP	TS-1673AU-RP	
			
Model	TS-1273AU-RP-8G	TS-1673AU-RP-16G	
CPU	AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	-	-	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Optional via a PCIe graphics card	Optional via a PCIe graphics card	
System Memory	8 GB UDIMM DDR4 (1 x 8 GB)	16 GB UDIMM DDR4 (1 x 16 GB)	
Maximum Memory	64 GB (2 x 32 GB)	64 GB (2 x 32 GB)	
Memory Slot	2 x Long-DIMM DDR4 Support ECC memory	2 x Long-DIMM DDR4 Support ECC memory	
Drive Bay	12 x 3.5-inch SATA 6Gb/s, 3Gb/s	16 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 slot	Optional via a QNAP QM2 PCIe card	Optional via a QNAP QM2 PCIe card	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	-	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via a network adapter	Optional via a network adapter	
10 Gigabit Ethernet Port	Optional via a network adapter	Optional via a network adapter	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	2 x PCIe Gen3 x4	2 x PCIe Gen3 x4	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	1 x Type-A	1 x Type-A	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C 1 x Type-A	2 x Type-C 1 x Type-A	
HDMI Output	Optional via a PCIe graphics card	Optional via a PCIe graphics card	
Form Factor	2U Rackmount	3U Rackmount	
Dimensions (HxWxD)	89 x 482 x 425	132 x 482 x 425	
Weight (Net)	9.69	12	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	300W (x2) PSU, 100 - 240V	550W (x2), 100-240V AC, 50-60Hz, 7-3.5A	
Power Consumption: Operating Mode, Typical	78.92	97.34	
Fan	2 x 80mm, 12VDC	3 x 80mm, 12VDC	
Kensington Security Slot	-	-	





TS-873AeU		TS-873AeU-RP	
			
TS-873AeU-4G		TS-873AeU-RP-4G	
AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor		AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor	
64-bit x86		64-bit x86	
-		-	
Yes		Yes	
Yes (AES-NI)		Yes (AES-NI)	
Optional via a PCIe graphics card		Optional via a PCIe graphics card	
4 GB SODIMM DDR4 (1 x 4 GB)		4 GB SODIMM DDR4 (1 x 4 GB)	
64 GB (2 x 32 GB)		64 GB (2 x 32 GB)	
2 x SODIMM DDR4 Support ECC memory		2 x SODIMM DDR4 Support ECC memory	
8 x 3.5-inch SATA 6Gb/s, 3Gb/s		8 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Yes		Yes	
2 x M2 2280 (PCIe Gen3 x 1)		2 x M2 2280 (PCIe Gen3 x 1)	
Yes		Yes	
-		-	
2 (2.5G/1G/100M/10M)		2 (2.5G/1G/100M/10M)	
Optional via a network adapter		Optional via a network adapter	
Optional via a network adapter		Optional via a network adapter	
-		-	
-		-	
1 x PCIe Gen3 x8		1 x PCIe Gen3 x8	
-		-	
-		-	
4 (2 x Type A, 2 x Type C)		4 (2 x Type A, 2 x Type C)	
Optional via a PCIe graphics card		Optional via a PCIe graphics card	
2U Rackmount		2U Rackmount	
89 x 482 x 297.4		89 x 482 x 297.4	
7.61		8.15	
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)	
250W PSU, 100 - 240V		300W PSU(x2), 100 - 240V	
"52.49		"58.14	
3 x 60mm, 12VDC		3 x 60mm, 12VDC	
-		-	



	QSW-M2106-4C	QSW-M2106-4S
		
Model	QSW-M2106-4C	QSW-M2106-4S
Management Type	Web Managed	Web Managed
Management Port		
Power Supply Description	Adapter	Adapter
Max. Power Consumption	36W	16W
Input Power Type	DC	DC
Input Voltage Range	12V/3A	12V/3A
MAC Address Table	16K	16K
Total Non-Blocking Throughput	55Gbps	55Gbps
Switching Capacity	110Gbps	110Gbps
Management Interface	Web	Web
Console	RJ45	RJ45
Energy Efficient Ethernet (IEEE 802.3az compliant)	Yes	Yes
Fan	PWM double ball bearing fan x 1	PWM double ball bearing fan x 1
Supported Standards	"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)"	"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service"
Number of Ports	10	10
10GbE SFP+	-	4
10GbE BASE-T (RJ45)	-	-
10GbE SFP+/RJ45 Combo Ports	4	-
2.5GbE (RJ45)	6	6
1GbE (RJ45)	-	-
Total PoE Ports	-	-
PoE PSE (802.3af, 15.4W)	-	-
PoE+ PSE (802.3at, 30W)	-	-
PoE++ PSE (802.3bt, 90W)	-	-
PoE Power Output	-	-
Total PoE Power Budget	-	-
Form Factor	Desktop	Desktop
Dimensions (HxWxD)	42.5 x 290 x 127	42.5 x 290 x 127






QSW-M2106R-2S2T		QSW-M2106PR-2S2T	
			
QSW-M2106R-2S2T		QSW-M2106PR-2S2T	
Web Managed		Web Managed	
Internal Power Supply Unit		Adapter	
40W		350W	
AC		AC	
100-240VAC, 50/60 Hz		100-240VAC, 50/60 Hz	
16K		16K	
55Gbps		55Gbps	
110Gbps		110Gbps	
Web		Web	
RJ45		RJ45	
Yes		Yes	
PWM VAPO Bearing fan x 2		PWM VAPO Bearing fan x 2	
"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service"		"IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3an 10G BASE-T IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af/at/bt Power-over-Ethernet (PoE)"	
10		10	
2		2	
2		2	
-		-	
6		6	
-		-	
-		8	
-		port 1~8	
-		port 1~8	
-		port 1~8	
-		port 1~8 (90W)	
-		310W	
Rackmount		Rackmount	
43.3 x 207 x 248.8		43.3 x 207 x 248.8	

	QSW-2104-2S	QSW-M2108-2C
		
Model	QSW-2104-2S	QSW-M2108-2C
Management Type	Unmanaged	Web Managed
Management Port	-	-
Power Supply Description	Adapter	Adapter
Max. Power Consumption	12 W	12.17 W
Input Power Type	DC	DC
Input Voltage Range	12V/1A	12V
MAC Address Table	16K	16K
Total Non-Blocking Throughput	30Gbps	40Gbps
Switching Capacity	60Gbps	80Gbps
Management Interface	-	Web
Console	-	RJ45
Energy Efficient Ethernet (IEEE 802.3az complaint)	Yes	Yes
Fan	-	PWM double ball bearing fan x 1
Supported Standards	IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10GBase-T IEEE 802.3az Energy Efficient Ethernet (EEE) SFP Transceiver 1000BASE-SX SFP Transceiver 1000BASE-LX SFP Transceiver 1000BASE-T Copper RJ45 GBIC	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)
Number of Ports	6	10
10GbE SFP+	2	-
10GbE BASE-T (RJ45)	-	-
10GbE SFP+/RJ45 Combo Ports	-	2
2.5GbE (RJ45)	4	8
1GbE (RJ45)	-	-
Total PoE Ports	-	-
PoE PSE (802.3af, 15.4W)	-	-
PoE+ PSE (802.3at, 30W)	-	-
PoE++ PSE (802.3bt, 90W)	-	-
PoE Power Output	-	-
Total PoE Power Budget	-	-
Form Factor	Desktop	Desktop
Dimensions (HxWxD)	34 x 180 x145	42.5 x 290 x 127
Weight (Net)	0.713	1.12




QSW-M2108-2S		QSW-M2108R-2C	
			
QSW-M2108-2S		QSW-M2108R-2C	
Web Managed		Web Managed	
-		-	
Adapter		Internal Power Supply Unit	
12.17 W		60W	
DC		AC	
12V		100-240VAC, 50/60 Hz	
16K		16K	
40Gbps		40Gbps	
80Gbps		80Gbps	
Web		Web	
RJ45		RJ45	
Yes		Yes	
PWM double ball bearing fan x 1		PWM double ball bearing fan x 1	
IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Class of Service		IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10G BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1w RSTP IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet (IEEE 802.1p Class of Service)	
10		10	
2		-	
-		-	
-		2	
8		8	
-		-	
-		-	
-		-	
-		-	
-		-	
-		-	
-		-	
Desktop		Desktop	
42.5 x 290 x 127		43.3 x 207 x 199.5	
1.12		1.2	



	QSW-M2116P-2T2S	QSW-1105-5T	QSW-2104-2T
			
Model	QSW-M2116P-2T2S	QSW-1105-5T	QSW-2104-2T
Management Type	Web Managed	Unmanaged	Unmanaged
Management Port	-	-	-
Power Supply Description	Internal Power Supply Unit	Adapter	Adapter
Max. Power Consumption	350W	12 W	12 W
Input Power Type	AC	DC	DC
Input Voltage Range	100-240VAC, 50/60 Hz	12V	12V/1A
MAC Address Table	32K	16K	16K
Total Non-Blocking Throughput	80Gbps	12.5Gbps	30Gbps
Switching Capacity	160Gbps	25Gbps	60Gbps
Management Interface	Web	-	-
Console	RJ45	-	-
Energy Efficient Ethernet (IEEE 802.3az compliant)	Yes	-	Yes
Fan	PWM double ball bearing fan x 2	Fanless	-
Supported Standards	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3an 10G BASE-T IEEE 802.3ae 10G Fiber IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.3ad LACP IEEE 802.1AB LLDP IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af/at/bt Power-over-Ethernet (PoE)	IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5GBase-T IEEE 802.3x Full-Duplex Flow Control	IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5GBase-T IEEE 802.3an 10GBase-T IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE
Number of Ports	20	5	6
10GbE SFP+	2	-	-
10GbE BASE-T (RJ45)	2	-	2
10GbE SFP+/RJ45 Combo Ports	-	-	-
2.5GbE (RJ45)	16	5	4
1GbE (RJ45)	-	-	-
Total PoE Ports	18	-	-
PoE PSE (802.3af, 15.4W)	Port 1-16	-	-
PoE+ PSE (802.3at, 30W)	Port 1-16	-	-
PoE++ PSE (802.3bt, 90W)	Port 19-20	-	-
PoE Power Output	Port 1-16 (30W), Port 19-20 (90W)	-	-
Total PoE Power Budget	280W	-	-
Form Factor	Rackmount	Desktop	Desktop
Dimensions (HxWxD)	43.5 x 285 x 234.8	34 x 180 x 145	34 x 180 x 145
Weight (Net)	2.08	0.577	0.722



Thunderbolt NAS Solution

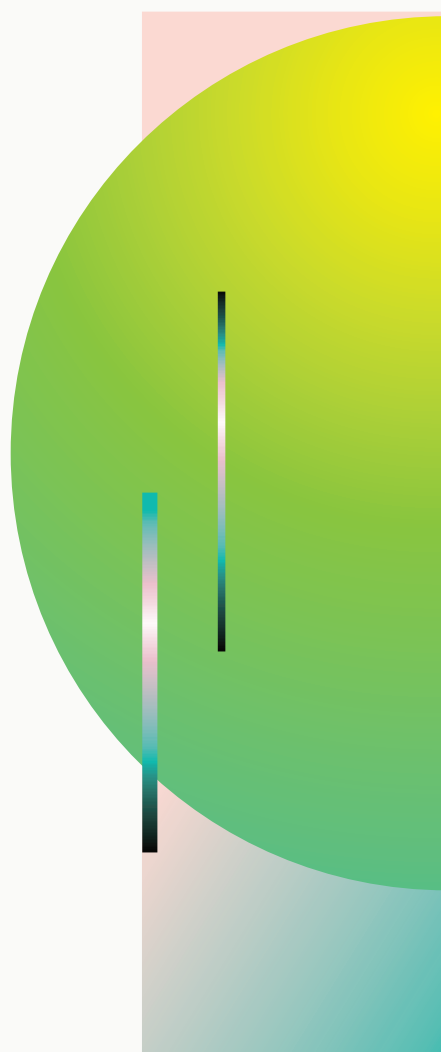Breakthrough
performance
and outstanding
connectivity
with Thunderbolt NAS



	TVS-h1688X	TVS-h1288X	
			
Model	TVS-h1688X-W1250-32G	TVS-h1288X-W1250-16G	
CPU	Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz	Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	Intel® UHD Graphics P630	Intel® UHD Graphics P630	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	Yes	
System Memory	32GB ECC UDIMM DDR4 (2 x 16 GB)	16 GB ECC UDIMM DDR4 (2 x 8 GB)	
Maximum Memory	128 GB (4 x 32 GB)	128 GB (4 x 32 GB)	
Memory Slot	4 x Long-DIMM DDR4	4 x Long-DIMM DDR4	
Drive Bay	12 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s	8 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 Slot	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots	2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	-	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	4 (also support 10M)	4 (also support 10M)	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	Optional via an adapter	Optional via an adapter	
10 Gigabit Ethernet Port	2 x 10GBASE-T (10G/1G)	2 x 10GBASE-T (10G/1G)	
25 Gigabit Ethernet Port	Optional via an adapter	Optional via an adapter	
Thunderbolt Port	Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter	Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter	
PCIe Slot	3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 2-port 10GbE network adapter.	3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 *Slot 1 is preinstalled with a 2-port 10GbE network adapter.	
USB 2.0 port	-	-	
USB 3.2 Gen 1 port	-	-	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C 4 x Type-A	2 x Type-C 3 x Type-A	
HDMI Output	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	
Form Factor	Tower	Tower	
Dimensions (HxWxD)	303.84 × 369.89 × 319.8	234.6 x 369.9 x 319.8	
Weight (Net)	13.41	11.27	
Operating temperature	0 - 40°C (32°F - 104°F)	0 - 40°C (32°F - 104°F)	
Power Supply Unit	550W PSU, 100~240V	550W PSU, 100~240V	
Power Consumption: Operating Mode, Typical	108.67 W	97.492	
Fan	System fan: 3 x 80mm, 12VDC CPU fan: 2 x 97mm, 12VDC	System fan: 3 x 80mm, 12VDC CPU fan: 2 x 97mm, 12VDC	
Kensington Security Slot	Yes	Yes	



TVS-472XT



TVS-472XT-i5-4G	TVS-472XT-i3-4G	TVS-472XT-PT-4G
Intel® Core™ i5-8400T 6-core/6-thread Processor, burst up to 3.3 GHz	Intel® Core™ i3-8100T 4-core/4-thread 3.1 GHz Processor	Intel® Pentium G5400T 2-core/4-thread 3.1 GHz Processor
64-bit x86	64-bit x86	64-bit x86
Intel® UHD Graphics 630	Intel® UHD Graphics 630	Intel® UHD Graphics 610
Yes	Yes	Yes
Yes (AES-NI)	Yes (AES-NI)	Yes (AES-NI)
Yes	Yes	Yes
4 GB SODIMM DDR4 (1 x 4 GB)	4 GB SODIMM DDR4 (1 x 4 GB)	4 GB SODIMM DDR4 (2 x 2 GB)
64 GB (2 x 32 GB)	64 GB (2 x 32 GB)	64 GB (2 x 32 GB)
2 x SO-DIMM DDR4	2 x SO-DIMM DDR4	2 x SO-DIMM DDR4
4 x 3.5-inch SATA 6Gb/s, 3Gb/s	4 x 3.5-inch SATA 6Gb/s, 3Gb/s	4 x 3.5-inch SATA 6Gb/s, 3Gb/s
Yes	Yes	Yes
2 x M.2 2280 PCIe Gen3 x2 slots	2 x M.2 2280 PCIe Gen3 x2 slots	2 x M.2 2280 PCIe Gen3 x2 slots
Yes	Yes	Yes
2	2	2
-	-	-
-	-	-
1 x 10GBASE-T (10G/5G/2.5G/1G/100M)	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)
-	-	-
2 (Thunderbolt™ 3)	2 (Thunderbolt™ 3)	2 (Thunderbolt™ 3)
2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter
-	-	-
1	1	1
2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps
1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)
Tower	Tower	Tower
188.2 x 199.3 x 279.6	188.2 x 199.3 x 279.6	188.2 x 199.3 x 279.6
5.4	5.4	5.4
0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
250W, 100-240V	250W, 100-240V	250W, 100-240V
37.32	37.32	37.32
System fan: 1 x 120mm, 12VDC CPU fan: 2 x 60mm blower fan	System fan: 1 x 120mm, 12VDC CPU fan: 2 x 60mm blower fan	System fan: 1 x 120mm, 12VDC CPU fan: 2 x 60mm blower fan
Yes	Yes	Yes






TVS-672XT



Model	TVS-672XT-i5-8G	TVS-672XT-i3-8G
CPU	Intel® Core™ i5-8400T 6-core/6-thread Processor, burst up to 3.3 GHz	
CPU Architecture	64-bit x86	
Graphic Processors	Intel® UHD Graphics 630	
Floating Point Unit	Yes	
Encryption Engine	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	
System Memory	8 GB SODIMM DDR4 (2 x 4 GB)	
Maximum Memory	64 GB (2 x 32 GB)	
Memory Slot	2 x SO-DIMM DDR4	
Drive Bay	6 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	
M.2 Slot	2 x M.2 2280 PCIe Gen3 x2 slots	
SSD Cache Acceleration Support	Yes	
Gigabit Ethernet Port (RJ45)	2	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	
10 Gigabit Ethernet Port	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)	
25 Gigabit Ethernet Port	-	
Thunderbolt Port	2 (Thunderbolt™ 3)	
PCIe Slot	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter	
USB 2.0 port	-	
USB 3.2 Gen 1 port	1	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	
HDMI Output	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)	
Form Factor	Tower	
Dimensions (HxWxD)	188.2 x 264.3 x 279.6	
Weight (Net)	6.553	
Operating temperature	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W, 100-240V	
Power Consumption: Operating Mode, Typical	45.6	
Fan	System fan: 2 x 92mm, 12VDC CPU fan: 2 x 60mm blower fan	
Kensington Security Slot	Yes	




	TVS-872XT	TS-453BT3
		
	TVS-872XT-i5-16G	TS-453BT3-8G
	Intel® Core™ i5-8400T 6-core/6-thread Processor, burst up to 3.3 GHz	Intel® Celeron® J3455 4-core/4-thread processor, burst up to 2.3 GHz
	64-bit x86	64-bit x86
	Intel® UHD Graphics 630	Intel® HD Graphics 500
	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)
	Yes	Yes
	16 GB SODIMM DDR4 (2 x 8 GB)	8 GB SO-DIMM DDR3L (2 x 4 GB)
	64 GB (2 x 32 GB)	8 GB (2 x 4 GB)
	2 x SO-DIMM DDR4	2 x SO-DIMM DDR3L
	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	4 x 3.5-inch SATA 6Gb/s, 3Gb/s
	Yes	Yes The following are not hot-swappable: M.2 SSDs, SSD cache drives, SSDs using PCIe expansion slots.
	2 x M.2 2280 PCIe Gen3 x2 slots	2 x M.2 2280 SATA 6Gb/s SSD slots (pre-installed QM2 PCIe card) The M.2 SSD is not included as standard.
	Yes	Yes
	2	2
	-	-
	-	-
	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)	1 x 10GBASE-T (10G/5G/2.5G/1G/100M) Pre-installed QM2 PCIe card
	-	-
	2 (Thunderbolt™ 3)	2 (Thunderbolt™ 3)
	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) Slot 1 is preinstalled with a Thunderbolt 3 adapter	1 x PCIe Gen 2 (x2), pre-installed with a QM2 expansion card (QM2-2S10G1TB) that includes a 10GbE 10GBASE-T port and two M.2 SATA SSD slots. The M.2 SATA SSD slots on this QM2 card only support M.2 2280 SATA 6Gb/s SSD, please check the compatibilities before purchase. PCIe bandwidth limitations will restrict the NAS 10GbE performance.
	-	-
	1	5
	2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps	Optional via a PCIe adapter (need to replace the pre-installed QM2 card)
	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)	2, HDMI 1.4b (up to 3840 x 2160 @ 30Hz)
	Tower	Tower
	188.2 x 329.3 x 279.6	168 x 170 x 226
	7.06	2.51
	0 - 40 °C (32°F - 104°F)	0 ~ 40°C (32°F ~ 104°F)
	250W, 100-240V	120W adapter, 100-240V
	65.03	38.101
	System fan: 2 x 120mm, 12VDC CPU fan: 2 x 60mm blower fan	System: 1 x 120mm
	Yes	Yes









Personal Cloud

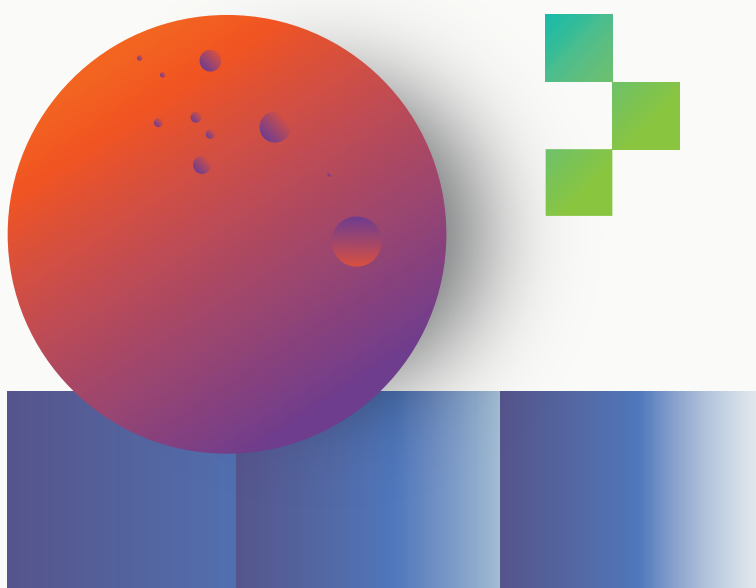

Easily build your
personal cloud
and access anywhere



	TS-131K	TS-231K	TS-431K	
				
Model	TS-131K	TS-231K	TS-431K	
CPU	AnnapurnaLabs, an Amazon company Alpine AL214, 4-core, 1.7GHz			
CPU Architecture	32-bit ARM			
Graphic Processors	-			
Floating Point Unit	Yes			
Encryption Engine	Yes			
Hardware-accelerated Transcoding	-			
System Memory	1GB DDR3			
Maximum Memory	1GB DDR3			
Memory Slot	-			
Drive Bay	1 x 3.5-inch SATA 6Gb/s, 3Gb/s	2 x 3.5-inch SATA 6Gb/s, 3Gb/s	4x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes			
M.2 Slot	-			
SSD Cache Acceleration Support	Yes			
Gigabit Ethernet Port (RJ45)	1	2	2	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-			
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-			
10 Gigabit Ethernet Port	-			
25 Gigabit Ethernet Port	-			
Thunderbolt Port	-			
PCIe Slot	-			
USB 2.0 port	-			
USB 3.2 Gen 1 port	2	2	2	
USB 3.2 Gen 2 (10Gbps) Port	-			
HDMI Output	-			
Form Factor	Tower			
Dimensions (HxWxD)	169 x 73 x 219	169 x 102 x 219	169 x 160 x 219	
Weight (Net)	1.19	1.46	2.01	
Operating temperature	0 - 40 °C (32°F - 104°F)			
Power Supply Unit	36W Adapter, 100-240V	60W/65W Adapter, 100-240V	90W Adapter, 100-240V	
Power Consumption: Operating Mode, Typical	11.62	15.6	26.57	
Fan	1 x 50mm, 12VDC	1 x 7 cm smart fan (12V DC)	1 x 120mm, 12VDC	
Kensington Security Slot	Yes			





	TS-133	TS-233	TS-433
			
	TS-133	TS-233	TS-433-4G
	ARM 4-core Cortex-A55 1.8GHz processor	ARM 4-core Cortex-A55 2.0GHz processor	ARM 4-core Cortex-A55 2.0GHz processor
	64-bit ARM	64-bit ARM	64-bit ARM
	-	-	-
	Yes	Yes	Yes
	Yes	Yes	Yes
	-	-	-
	2 GB on board (non-expandable)	2 GB on board (non-expandable)	4 GB on board (non-expandable)
	2 GB on board (non-expandable)	2 GB on board (non-expandable)	4 GB on board (non-expandable)
	-	-	-
	1 x 3.5-inch SATA 6Gb/s, 3Gb/s	2 x 3.5-inch SATA 6Gb/s, 3Gb/s	4x 3.5-inch SATA 6Gb/s, 3Gb/s
	-	Yes	Yes
	-	-	-
	-	-	-
	1	1	1
	-	-	1 (2.5G/1G/100M)
	-	-	-
	-	-	-
	-	-	-
	-	-	-
	-	-	-
	1	2	2
	1	1	1
	-	-	-
	-	-	-
	Tower	Tower	Tower
	187.5 x 66.1 x 157.6	188.64 x 90.18 x 156.26	169 x 160 x 219
	0.61	1.11	2.07
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	36W Adapter, 100-240V	65W adapter (12VDC), 100-240VAC	90W adapter (12VDC), 100-240VAC
	7.32	10.81	22.54
	1 x 50mm, 12VDC	1 x 80mm, 12VDC	1 x 120mm, 12VDC
	-	-	Yes

	HS-264	HS-453DX	
			
Model	HS-264	HS-453DX-8G	
CPU	Intel Celeron N5105 4 core 2.0GHz, burst up to 2.9GHz	Intel® Celeron® J4115 4-core/4-thread processor, burst up to 2.5 GHz	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	Intel® UHD Graphics	Intel® HD Graphics 600	
Floating Point Unit	Yes	Yes	
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)	
Hardware-accelerated Transcoding	Yes	Yes	
System Memory	8 GB DDR4, not expandable	8 GB SO-DIMM DDR4 (2 x 4 GB)	
Maximum Memory	8 GB DDR4, not expandable	8 GB (2 x 4 GB)	
Memory Slot	-	2 x SO-DIMM DDR4	
Drive Bay	2 x 3.5-inch SATA 6Gb/s, 3Gb/s	2 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 Slot	-	2 x M.2 2280 SATA 6Gb/s slots	
SSD Cache Acceleration Support	Yes	Yes	
Gigabit Ethernet Port (RJ45)	-	1	
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	2 (also support 10M)	-	
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-	
10 Gigabit Ethernet Port	-	1 x 10GBASE-T (10G/5G/2.5G/1G/100M)	
25 Gigabit Ethernet Port	-	-	
Thunderbolt Port	-	-	
PCIe Slot	-	-	
USB 2.0 port	-	2	
USB 3.2 Gen 1 port	2 x Type A	3 (1 x USB-C, 2 x USB-A)	
USB 3.2 Gen 2 (10Gbps) Port	2 x Type A	-	
HDMI Output	2 x HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz)	2, HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz) + HDMI 1.4b (up to 3840 x 2160 @ 30Hz)	
Form Factor	Tower	Set-top design	
Dimensions (HxWxD)	41.3 x 302 x 220	43.8 x 404 x 220	
Weight (Net)	1.56	2.4	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 35 °C (32°F - 95°F)	
Power Supply Unit	60W adapter, 100-240V	External Power Adapter, 90W, 100-240V	
Power Consumption: Operating Mode, Typical	-	22.38	
Fan	-	-	
Kensington Security Slot	Yes	-	



	TS-364	TBS-464
		
	TS-364-4G	TBS-464-8G
	Intel® Celeron® N5105/N5095/N5095A 4-core/4-thread processor, burst up to 2.9 GHz	Intel® Celeron® N5105 4-core/4-thread processor, burst up to 2.9GHz
	64-bit x86	64-bit x86
	Intel® UHD Graphics	Intel® UHD Graphics
	Yes	Yes
	Yes (AES-NI)	Yes (AES-NI)
	Yes	Yes
	4 GB SODIMM DDR4 (1 x 4 GB)	8 GB DDR4, not expandable
	16 GB (2 x 8 GB)	8 GB DDR4, not expandable
	2 x SO-DIMM DDR4	-
	3 x 3.5-inch SATA 6Gb/s, 3Gb/s	-
	Yes	-
	2 x M.2 2280 PCIe Gen 3 x2 slots	4 x M.2 2280 NVMe Gen3 x2 slots
	Yes	Yes
	-	-
	1	2 (also support 10M)
	Optional via an adapter	-
	-	-
	-	-
	-	-
	-	-
	-	-
	-	3
	1	2
	2 x Type-A	-
	1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz)	2, HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz)
	Tower	Set-top design
	142 x 150 x 260	30 x 230 x 165
	1.64	0.8
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	65W adapter, 100 - 240V	External Power Adapter, 65W, 100-240V
	-	16.52
	1 x 92mm, 12VDC	1 x system fan
	Yes	Yes





	TS-262	TS-462
		
Model	TS-262-4G	TS-462-2G
CPU	Intel® Celeron® N4505 2-core/2-thread processor, burst up to 2.9 GHz	Intel® Celeron® N4505 2-core/2-thread processor, burst up to 2.9 GHz
CPU Architecture	64-bit x86	64-bit x86
Graphic Processors	Intel® UHD Graphics	Intel® UHD Graphics
Floating Point Unit	Yes	Yes
Encryption Engine	Yes (AES-NI)	Yes (AES-NI)
Hardware-accelerated Transcoding	Yes	Yes
System Memory	4 GB on board (non-expandable)	2 GB SODIMM DDR4 (1 x 2 GB)
Maximum Memory	4 GB	16 GB (2 x 8GB)
Memory Slot	-	2 x SODIMM DDR4
Drive Bay	2 x 3.5-inch SATA 6Gb/s	4 x 3.5-inch SATA 6Gb/s
Hot-swappable	Yes	Yes
M.2 Slot	2 x M.2 2280 PCIe Gen 3 x1	2 x M.2 2280 PCIe Gen 3 x1
SSD Cache Acceleration Support	Yes	Yes
Gigabit Ethernet Port (RJ45)	-	-
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	1 (2.5G/1G/100M/10M)	1 (2.5G/1G/100M/10M)
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-	-
10 Gigabit Ethernet Port	-	-
25 Gigabit Ethernet Port	-	-
Thunderbolt Port	-	-
PCIe Slot	1 Slot 1: PCIe Gen 3 x2	1 Slot 1: PCIe Gen 3 x2
USB 2.0 port	2	2
USB 3.2 Gen 1 port	-	-
USB 3.2 Gen 2 (10Gbps) Port	2 x Type-A	2 x Type-A
HDMI Output	1, HDMI 2.0	1, HDMI 2.0
Form Factor	Tower	Tower
Dimensions (HxWxD)	168 x 105 x 226	168 x 170 x 226
Weight (Net)	1.55	2.26
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	65W adapter, 100-240V	90W adapter, 100-240V
Power Consumption: Operating Mode, Typical	12.448	25.98
Fan	1 x 70mm, 12VDC	1 x 120mm, 12VDC
Kensington Security Slot	Yes	Yes




Surveillance Solution

Next-generation
intelligent IP surveillance
and remote backup
solution



	QVP-63A	QVP-85A	
			
Model	QVP-63A	QVP-85A	
OS	QVR Pro OS (QVP)	QVR Pro OS (QVP)	
CPU	Intel® Core™ i3-8100T 4-core 3.1 GHz Processor	Intel® Core™ i5-8400T 6-core 1.7 GHz Processor, Max turbo to 3.3 GHz	
CPU Architecture	64-bit x86	64-bit x86	
Graphic Processors	Intel® UHD Graphics 630	Intel® UHD Graphics 630	
System Memory	16 GB SODIMM DDR4 (2 x 8 GB)	16 GB SODIMM DDR4 (2 x 8 GB)	
Maximum Memory	32 GB (2 x 16 GB)	32 GB (2 x 16 GB)	
Memory Slot	2 x SO-DIMM DDR4	2 x SO-DIMM DDR4	
Drive Bay	6 x 3.5-inch SATA 6Gb/s, 3Gb/s	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	Yes	Yes	
M.2 SSD Slot	2 x M.2 2280 PCIe Gen3 x2 slots	2 x M.2 2280 PCIe Gen3 x2 slots	
Max Live Cameras (Local Display)	32ch @ All 720p, H.264, 30FPS 16ch @ All 1080p, H.264, 30FPS	32ch @ All 720p, H.264, 30FPS 16ch @ All 1080p, H.264, 30FPS	
Max Playback Cameras (Local Display)	12	12	
Max Concurrent Connection (Client)	16 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras	16 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras	
Embedded Channel	8	8	
Max Channel	36 H264 / 1920x1080 / 30FPS	48 H264 / 1920x1080 / 30FPS	
Max Throughput	396 Mbps	528 Mbps	
Gigabit Ethernet Port(RJ45)	2	2	
1GbE SFP/RJ45 Combo Ports	-	-	
PoE PSE (802.3af, 15.4W)	-	-	
PoE+ PSE (802.3at, 30W)	-	-	
PoE Power Output	-	-	
Total PoE Power Budget	-	-	
2.5 Gigabit Ethernet Port	-	-	
PCI slot	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH)	2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH)	
USB 3.2 Gen 1 port	1	1	
USB 3.2 Gen 2 (10Gbps)Port	2 x Type-C USB 3.2 Gen2 5V/3A 10Gbps 2 x Type-A USB 3.2 Gen2 5V/1A 10Gbps	2 x Type-C USB 3.2 Gen2 5V/3A 10Gbps 2 x Type-A USB 3.2 Gen2 5V/1A 10Gbps	
HDMI Output	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)	1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)	
Form Factor	Tower	Tower	
Dimensions (HxWxD)	188.2 x 264.3 x 279.6	188.2 x 329.3 x 279.6	
Weight (Net)	6.553	7.06	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W, 100-240V	250W, 100-240V	
Power Consumption: Operating Mode, Typical	45.6	65.03	
Fan	System fan: 2 x 92mm, 12VDC CPU fan: 2 x 60mm blower fan	System fan: 2 x 120mm, 12VDC CPU fan: 2 x 60mm blower fan	
Tray Locker	Yes	Yes	



QVP-41B	
	
	QVP-41B
	QVR Pro OS (QVP)
	Intel Celeron® Processor
	64-bit x86
	Intel® HD Graphics 600
	8 GB SODIMM DDR4 (2 x 4 GB)
	8 GB (2 x 4 GB)
	2 x SO-DIMM DDR4
	4 x 3.5-inch SATA 6Gb/s, 3Gb/s
	Yes
	2 x M.2 2280 SATA x2 slots
	24ch @ All 720p,H.264, 30FPS 12ch @ All 1080p,H.264, 30FPS
	12
	8 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras
	8
	24 H264 / 1920x1080 / 30FPS
	288 Mbps
	14
	2
	port 1-16
	port 1-16
	port 1-16 (Max 30W per port)
	140W
	2
	-
	3
	-
	2, HDMI 2.0 (up to 3840 x 2160 @ 60Hz)
	Tower
	130 x 295 x 224.8
	4.08
	0 - 40 °C (32°F - 104°F)
	250W, 100-240V
	43.584
	System fan: 120 x 120mm, 12VDC
	Yes


TS-i410X





Model	TS-i410X-8G
CPU	Intel® Atom® x6425E 4-core/4-thread processor, burst up to 3.0 GHz
CPU Architecture	64-bit x86
Graphic Processors	Intel® UHD Graphics for 10th Gen Intel® Processors
Floating Point Unit	Yes
Encryption Engine	Yes (AES-NI)
Hardware-accelerated Transcoding	Yes
System Memory	8 GB on board (non-expandable) Note: Reserves some RAM for use as shared graphics memory.
Maximum Memory	8 GB on board (non-expandable)
Memory Slot	-
Drive Bay	4 x 2.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	Yes
M.2 Slot	-
SSD Cache Acceleration Support	Yes
Gigabit Ethernet Port (RJ45)	-
2.5 Gigabit Ethernet Port (2.5G/1G/100M)	-
5 Gigabit Ethernet Port (5G/2.5G/1G/100M)	-
10 Gigabit Ethernet Port	2 x 10GBASE-T (10G/5G/2.5G/1G)
25 Gigabit Ethernet Port	-
Thunderbolt Port	-
PCIe Slot	-
USB 2.0 Port	-
USB 3.2 Gen 1 port	-
USB 3.2 Gen 2 (10Gbps) Port	4
HDMI Output	1, HDMI 1.4b (up to 3840 x 2160 @ 30Hz)
Form Factor	Tower
Dimensions (HxWxD)	65 x 180 x 254
Weight (Net)	2.54
Operating Temperature	-40 - 70 °C (-40°F - 158°F)
Power Supply Unit	1. External Power Adapter, 90W and above, AC 100-240V 2. 9-36V DC input To avoid potential personal injury or component damage, DO NOT plug in two power inputs simultaneously.
Power Consumption: Operating Mode, Typical	-
Fan	-
Kensington Security Slot	Yes
Power Supply Unit	250W, 100-240V
Power Consumption: Operating Mode, Typical	43.584
Power Off (Wake-On-LAN/WOL)	-
Fan	System fan: 120 x 120mm, 12VDC
Tray Locker	Yes
Supported Standards	CE, FCC, VCCI, BSMI
Electromagnetic Compliance	Class A



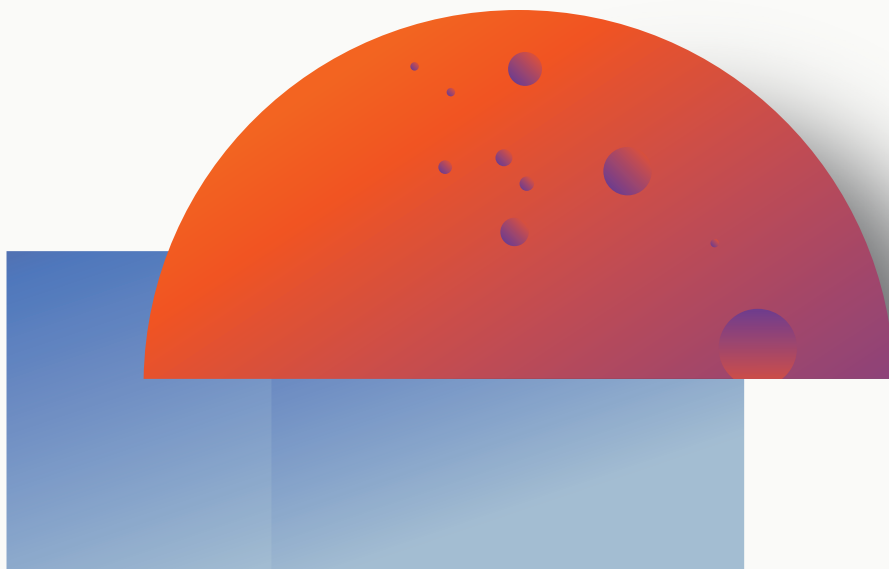


QuWAN SD-WAN solution for resilient IT infrastructure




	QGD-1602P		
			
Model	QGD-1602P-C3758-16G	QGD-1602P-C3558-8G	
Management Type	Web Managed	Web Managed	
PCIe Slot	Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed)	Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed)	
USB 3.2 Gen 1 port	2	2	
USB 2.0 port	-	-	
Management Port	2 x 5GbE ; 2 x 1GbE	2 x 5GbE ; 2 x 1GbE	
USB 3.2 Gen 2 (10Gbps) Port	Optional via PCIe adapter	Optional via PCIe adapter	
HDMI Output	-	-	
Power Supply Description	Internal Power Supply Unit	Internal Power Supply Unit	
Max. Power Consumption	500W	280W	
Input Power Type	AC	AC	
Input Voltage Range	100-240VAC, 50/60 Hz	100-240VAC, 50/60 Hz	
MAC Address Table	32K	32K	
Total Non-Blocking Throughput	48Gbps	48Gbps	
Switching Capacity	96Gbps	96Gbps	
Management Interface	Web	Web	
Energy Efficient Ethernet (IEEE 802.3az complaint)	-	-	
Fan	System: 3 x 4 cm (12V DC)	System: 3 x 4 cm (12V DC)	
Supported Standards	IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5G BASE-T Multi-Gig Ethernet IEEE 802.3an 10GBASE-T 10G Ethernet IEEE 802.3ae 10GBASE-SR IEEE 802.3ae 10GBASE-LR IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization	IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5G BASE-T Multi-Gig Ethernet IEEE 802.3an 10GBASE-T 10G Ethernet IEEE 802.3ae 10GBASE-SR IEEE 802.3ae 10GBASE-LR IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization	
Number of Ports	18	18	
10GbE SFP+	2 10G/1G	2 10G/1G	
2.5GbE (RJ45)	8	8	
1GbE (RJ45)	8	8	
1GbE SFP/RJ45 Combo Ports	-	-	
Total PoE Ports	16	16	
PoE PSE (802.3af, 15.4W)	Ports 1-16	Ports 1-16	
PoE+ PSE (802.3at, 30W)	Ports 1-16	Ports 1-16	
PoE++ PSE (802.3bt, 60W)	-	-	
PoE++ PSE (802.3bt, 90W)	Ports 1-4	Ports 1-4	
PoE Power Output	Ports 1-4 (90W), Ports 5-16 (30W)	Ports 1-4 (90W), Ports 5-16 (30W)	
Total PoE Power Budget	370W	200W	
Form Factor	Rackmount	Rackmount	
Dimensions (HxWxD)	44.2 x 435.2 x 327.7	44.2 x 435.2 x 327.7	
Weight (Net)	4.37	4.37	



QGD-1600P		QGD-3014-16PT
		
QGD-1600P-8G	QGD-1600P-4G	QGD-3014-16PT-8G
Web Managed	Web Managed	Web Managed
Slot 1: PCIe Gen2 (x2) Slot 2: PCIe Gen2 (x2)	Slot 1: PCIe Gen2 (x2) Slot 2: PCIe Gen2 (x2)	-
1	1	3
2	2	-
1 x 1GbE	1 x 1GbE	2 x 2.5GbE
Optional via PCIe adapter	Optional via PCIe adapter	-
1	1	2
Internal Power Supply Unit	Internal Power Supply Unit	Internal Power Supply Unit
418W	418W	250W
AC	AC	AC
100-240VAC, 50/60 Hz	100-240VAC, 50/60 Hz	100-240VAC, 50/60 Hz
8K	8K	8K
16Gbps	16Gbps	16Gbps
32Gbps	32Gbps	32Gbps
Web	Web	Web
Yes	Yes	Yes
System: 2 x 4 cm (12V DC)	System: 2 x 4 cm (12V DC)	System: 12 x 12 cm (12V DC)
IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization	IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization	IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af/at Power-over-Ethernet (PoE)
16	16	16
-	-	-
-	-	-
14	14	14
2	2	2
16	16	16
Ports 1-16	Ports 1-16	Ports 1-16
Ports 1-16	Ports 1-16	Ports 1-16
Ports 1-4	Ports 1-4	-
-	-	-
Ports 1-4 (60W), Ports 5-16 (30W)	Ports 1-4 (60W), Ports 5-16 (30W)	Ports 1-16 (Max 30W)
360W	360W	140W
Rackmount	Rackmount	Desktop
47.2 x 436.2 x 326.2	47.2 x 436.2 x 326.2	130 x 295 x 224.8
4.41	4.41	4.08



	QuCPE-3032	QuCPE-3034	
			
Model	QuCPE-3032-C3558R-8G	QuCPE-3034-C3758R-16G	
CPU	Intel® Atom® C3558R 4-core 2.4 GHz processor	Intel® Atom® C3758R 8-core 2.4 GHz processor	
System Memory	8GB DDR4 2400MHz Non-ECC UDIMM(1 x 8 GB)	16GB DDR4 2400MHz Non-ECC UDIMM(2 x 8 GB)	
Maximum Memory	128GB (2x64GB)	128GB (2x64GB)	
Memory Slot	2 x 288pin DDR4-2400 slots	2 x 288pin DDR4-2400 slots	
Drive Bays	-	-	
PCIe Slot	-	-	
Console Port (RJ45)	1	1	
Fan	2 x 4cm Smart Fan	2 x 4cm Smart Fan	
M.2 SSD Slots	2 x M.2 2280 NVMe	2 x M.2 2280 NVMe	
USB 2.0 port	1 Type-A	1 Type-A	
USB 3.2 Gen 1 port	1 Type-A	1 Type-A	
Power	DC in, 60w	DC in, 60w	
Intel QAT support	Yes	Yes	
SR-IOV support	Yes	Yes	
Intel DPDK support	Yes	Yes	
Dimension W x D x H (mm)	285 x 237 x 46	285 x 237 x 46	
Total number of built-in and Pre-configured Ports	10	12	
10GbE SFP+	2	4	
2.5GbE (RJ45)	8	8	
Network Module Slot	-	-	
Form Factor	Desktop	Desktop	





QuCPE-7012





QuCPE-7012-D2166NT-64G	QuCPE-7012-D2146NT-32G	QuCPE-7012-D2123IT-8G
Intel® Xeon® D-2166NT 12-core/ 24-thread 2.0GHz processor (16.6M Cache; up to 3.0 GHz)	Intel® Xeon® D-2146NT 8-core/ 16-thread 2.3GHz processor (11M Cache; burst up to 3.0GHz)	Intel® Xeon® D-2123IT 4C/8T (11M Cache, 2.20 GHz, up to 3GHz)
64GB DDR4 2666MHz ECC RDIMM (4 x 16GB)	32GB DDR4 2666MHz ECC RDIMM (2 x 16GB)	8GB DDR4 2666MHz ECC RDIMM (1 x 8GB)
128 GB (UDIMM) or 256GB (RDIMM)		
8 x Long-DIMM DDR4 DDR4 2133/2400MHz slots, up to 128 GB (UDIMM) or 256GB (RDIMM)		
2 x 2.5-inch SATA 6Gb/s, 3Gb/s		
1 x PCIe Gen 3 x8		
1		
3 x Cooling fans with smart fan		
-		
1		
1		
Redundant power 300W, 90V~264V AC		
Yes	Yes	
Yes		
Yes		
430 x 426 x 44.2		
12		
4		
8		
1		
Rackmount, 1U		


	QMiroPlus-201W	QMiro-201W	
			
Model	QMiroPlus-201W	QMiro-201W	
Number of Ethernet Ports	5	2	
10GbE BASE-T (RJ45)	-	-	
2.5GbE Host Port(RJ45)	1	-	
1GbE (RJ45)	4	2	
CPU	Router: Qualcomm IPQ4019, Quad 4cores ARM Cortex A7@716.8MHz NAS: Intel Gemini Lake J4125 4cores @2.0Ghz	Qualcomm IPQ4019, Quad 4core ARM Cortex A7@716.8MHz	
Memory	Router: 512MB DDR3 NAS: 4GB DDR4	512MB DDR3	
Flash	Router: 4MB SPI NOR Flash+4GB eMMC NAS:4GB eMMC	4MB SPI NOR Flash 4GB eMMC	
Wireless Antenna	4 Internal Antennas	4 Internal Antennas	
Wireless Antenna Type	2 Internal dual band(2.4G/5G) antennas 2 Internal single band(5G) antennas	2 Internal dual band(2.4G/5G) antennas 2 Internal single band(5G) antennas	
Antenna Gain 2.4 GHz	2.5dBi, 2.6dBi	4.6dBi, 2.7dBi	
Antenna Gain 5 GHz	4.6dBi, 4.4dBi	4.9dBi, 6.0dBi	
Wi-Fi 6 (802.11ax)	-	-	
Wi-Fi 5 (802.11ac)	Yes	Yes	
USB 3.2 Gen 1 port	2	1	
Bluetooth	Version 5	Version 5	
Bluetooth Antenna Gain	3.42dBi	2.3dBi	
Button	Power(for NAS), Reset, WPS	Reset, WPS	
Power	12V DC	12V DC	
Power consumption	60W	24W	
Wireless Standard	802.11a/b/g/n/ac	802.11a/b/g/n/ac	
Wireless Speed Rating	AC2200	AC2200	
Wireless Speed 2.4 GHz	2.4G (400Mbps): 2x2 Dual Band(20/40MHz)	2.4G (400Mbps): 2x2 Dual Band(20/40MHz)	
Wireless Speed 5 GHz	5G (867+867Mbps): 2x2 Dual Band(20/40/80MHz), 2x2 Single Band (20/40/80MHz)	5G (867+867Mbps): 2x2 Dual Band(20/40/80MHz), 2x2 Single Band(20/40/80MHz)	
Frequency Band 2.4 GHz	Yes	Yes	
Frequency Band 5 GHZ	Yes	Yes	
Wireless Bandwidth	20/40/80MHz	20/40/80MHz	
Transmit Output Power	Depends on country code	Depends on country code	
Dimensions	183.5 x 105 x 143.5	68 x 100 x 175.5	
Weight	1.44	0.44	
Operating Temperature	0°C ~ +40°C	0°C ~ +40°C	
Operating Humidity	5% to 95% non-condensing	5% to 95% non-condensing	
Certifications	JATE / CE / FCC / BSMI / NCC / IC / SRRC / CCC / VCCI / RCM / OFCA	JATE / CE / FCC / BSMI / NCC / IC / SRRC / VCCI / RCM / OFCA	
Wi-Fi Mesh	Yes (with Tri-Band)	Yes (with Tri-Band)	
QNAP SD-WAN solution, QuWAN	Yes	Yes	
Drive Bay	2 x 2.5-inch SATA 3Gb/s(Compatible with 6Gb/s SSD/HDD)	-	



		QHora-321	QHora-322
			
	Model	QHora-321	QHora-322
	Number of Ethernet Ports	6	9
	10GbE BASE-T (RJ45)	-	3 x 10GBASE-T (10G/5G/2.5G/1G/100M)
	2.5GbE (RJ45)	6	6
	1GbE (RJ45)	-	-
	CPU	Marvell CN9130 Quad Core Armv8 Cortex-A72	Marvell CN9130 Quad Core Armv8 Cortex-A72
	Memory	4GB DDR4	4GB DDR4
	Flash	4MB SPI NOR Flash 4GB eMMC	4MB SPI NOR Flash 4GB eMMC
	Wireless Antenna	-	-
	Wireless Antenna Type	-	-
	Antenna Gain 2.4 GHz	-	-
	Antenna Gain 5 GHz	-	-
	Transmission Power	-	-
	Wi-Fi 6 (802.11ax)	-	-
	Wi-Fi 5 (802.11ac)	-	-
	USB 3.2 Gen 1 port	-	1
	USB 3.2 Gen 1 port_note	-	Only for connecting USB storage for FTP service on the router
	Button	Reset	Reset
	Power	12V DC	12V DC
	Power consumption	36W	36W
	Wireless Standard	-	-
	Wireless Speed Rating	-	-
	Wireless Speed 2.4 GHz	-	-
	Wireless Speed 5 GHz	-	-
	Frequency Band 2.4 GHz	-	-
	Frequency Band 5 GHz	-	-
	Wireless Bandwidth	-	-
	Transmit Output Power	-	-
	Dimensions (HxWxD)	166.4 x 145.7 x 29.85	226 x 140 x 44.4
	Weight	0.81Kg	1.08Kg
	Packing weight	1.35Kg	1.61Kg
	Operating Temperature	0°C ~ +40°C	0°C ~ +40°C
	Operating Humidity	5% to 95% non-condensing	5% to 95% non-condensing
	Certifications	CE / FCC / VCCI / BSMI / RCM / CCC / UKCA	CE / FCC / VCCI / BSMI / RCM / CCC / UKCA
	QNAP SD-WAN solution, QuWAN	Yes	Yes






	QHora-301W
	
Model	QHora-301W
Number of Ethernet Ports	6
10GbE BASE-T (RJ45)	2 x 10GBASE-T (10G/5G/2.5G/1G/100M)
2.5GbE (RJ45)	-
1GbE (RJ45)	4
CPU	Qualcomm IPQ8072A Hawkeye 2 Quad-core 2.2 GHz 64-bit CPU
Memory	1GB
Flash	4GB eMMC
Wireless Antenna	8 Internal Antennas
Wireless Antenna Type	8 Internal 5dBi Antennas
Antenna Gain 2.4 GHz	4.5dBi
Antenna Gain 5 GHz	5.2dBi
Transmission Power	24dBm
Wi-Fi 6 (802.11ax)	Yes
Wi-Fi 5 (802.11ac)	Yes
USB 3.2 Gen 1 port	2
USB 3.2 Gen 1 port_note	Only for connecting USB storage for FTP service on the router
Button	Power, WPS, Reset
Power	12V DC
Power consumption	24W
Wireless Standard	802.11a/b/g/n/ac/ax
Wireless Speed Rating	AX3600
Wireless Speed 2.4 GHz	2.4G (1182Mbps): 4x4 (40MHz)
Wireless Speed 5 GHz	5G (2475Mbps): 4x4 (80MHz), 2x2 (160MHz)
Frequency Band 2.4 GHz	Yes , dual band
Frequency Band 5 GHZ	Yes , dual band
Wireless Bandwidth	20/40/80/160 MHz
Transmit Output Power	Depends on country code
Dimensions (HxWxD)	250×180×48
Weight	1.9kg
Packing weight	2.2kg
Operating Temperature	0°C ~ +40°C
Operating Humidity	5% to 95% non-condensing
Certifications	JATE / CE / FCC / BSMI / NCC / IC / SRRC / CCC / VCCI / RCM
QNAP SD-WAN solution, QuWAN	Yes





Secure communication with remote devices



	QHora-321	QHora-322	
			
Model	QHora-321	QHora-322	
Number of Ethernet Ports	6	9	
10GbE BASE-T (RJ45)	-	3 x 10GBASE-T (10G/5G/2.5G/1G/100M)	
2.5GbE (RJ45)	6	6	
1GbE (RJ45)	-	-	
CPU	Marvell CN9130 Quad Core Armv8 Cortex-A72	Marvell CN9130 Quad Core Armv8 Cortex-A72	
Memory	4GB DDR4	4GB DDR4	
Flash	4MB SPI NOR Flash 4GB eMMC	4MB SPI NOR Flash 4GB eMMC	
Wireless Antenna	-	-	
Wireless Antenna Type	-	-	
Antenna Gain 2.4 GHz	-	-	
Antenna Gain 5 GHz	-	-	
Transmission Power	-	-	
Wi-Fi 6 (802.11ax)	-	-	
Wi-Fi 5 (802.11ac)	-	-	
USB 3.2 Gen 1 port	-	1	
USB 3.2 Gen 1 port_note	-	Only for connecting USB storage for FTP service on the router	
Button	Reset	Reset	
Power	12V DC	12V DC	
Power consumption	36W	36W	
Wireless Standard	-	-	
Wireless Speed Rating	-	-	
Wireless Speed 2.4 GHz	-	-	
Wireless Speed 5 GHz	-	-	
Frequency Band 2.4 GHz	-	-	
Frequency Band 5 GHZ	-	-	
Wireless Bandwidth	-	-	
Transmit Output Power	-	-	
Dimensions (HxWxD)	166.4 x 145.7 x 29.85	226 x 140 x 44.4	
Weight	0.81Kg	1.08Kg	
Packing weight	1.35Kg	1.61Kg	
Operating Temperature	0°C ~ +40°C	0°C ~ +40°C	
Operating Humidity	5% to 95% non-condensing	5% to 95% non-condensing	
Certifications	CE / FCC / VCCI / BSMI / RCM / CCC / UKCA	CE / FCC / VCCI / BSMI / RCM / CCC / UKCA	
QNAP SD-WAN solution, QuWAN	Yes	Yes	



QHora-301W



QHora-301W

6

2 x 10GBASE-T (10G/5G/2.5G/1G/100M)

-

4

Qualcomm IPQ8072A Hawkeye 2 Quad-core 2.2 GHz 64-bit CPU

1GB

4GB eMMC

8 Internal Antennas

8 Internal 5dBi Antennas

4.5dBi

5.2dBi

24dBm

Yes

Yes

2

Only for connecting USB storage for FTP service on the router

Power, WPS, Reset

12V DC

24W

802.11a/b/g/n/ac/ax

AX3600

2.4G (1182Mbps): 4x4 (40MHz)

5G (2475Mbps): 4x4 (80MHz), 2x2 (160MHz)

Yes , dual band

Yes , dual band

20/40/80/160 MHz

Depends on country code

250×180×48

1.9kg





2.2kg

0°C ~ +40°C

5% to 95% non-condensing

JATE / CE / FCC / BSMI / NCC / IC / SRRC / CCC / VCCI / RCM

Yes








Home Wifi Mesh Solution

Enjoy a high-coverage
Mesh Wi-Fi experience




	QMiroPlus-201W	QMiro-201W
		
Model	QMiroPlus-201W	QMiro-201W
Number of Ethernet Ports	5	2
10GbE BASE-T (RJ45)	-	-
2.5GbE Host Port(RJ45)	1	-
1GbE (RJ45)	4	2
CPU	Router: Qualcomm IPQ4019, Quad 4cores ARM Cortex A7@716.8MHz NAS: Intel Gemini Lake J4125 4cores @2.0Ghz	Qualcomm IPQ4019, Quad 4core ARM Cortex A7@716.8MHz
Memory	Router: 512MB DDR3 NAS: 4GB DDR4	512MB DDR3
Flash	Router: 4MB SPI NOR Flash+4GB eMMC NAS:4GB eMMC	4MB SPI NOR Flash 4GB eMMC
Wireless Antenna	4 Internal Antennas	4 Internal Antennas
Wireless Antenna Type	2 Internal dual band(2.4G/5G) antennas 2 Internal single band(5G) antennas	2 Internal dual band(2.4G/5G) antennas 2 Internal single band(5G) antennas
Antenna Gain 2.4 GHz	2.5dBi, 2.6dBi	4.6dBi, 2.7dBi
Antenna Gain 5 GHz	4.6dBi, 4.4dBi	4.9dBi, 6.0dBi
Wi-Fi 6 (802.11ax)	-	-
Wi-Fi 5 (802.11ac)	Yes	Yes
USB 3.2 Gen 1 port	2	1
Bluetooth	Version 5	Version 5
Bluetooth Antenna Gain	3.42dBi	2.3dBi
Button	Power(for NAS), Reset, WPS	Reset, WPS
Power	12V DC	12V DC
Power consumption	60W	24W
Wireless Standard	802.11a/b/g/n/ac	802.11a/b/g/n/ac
Wireless Speed Rating	AC2200	AC2200
Wireless Speed 2.4 GHz	2.4G (400Mbps): 2x2 Dual Band(20/40MHz)	2.4G (400Mbps): 2x2 Dual Band(20/40MHz)
Wireless Speed 5 GHz	5G (867+867Mbps): 2x2 Dual Band(20/40/80MHz), 2x2 Single Band (20/40/80MHz)	5G (867+867Mbps): 2x2 Dual Band(20/40/80MHz), 2x2 Single Band(20/40/80MHz)
Frequency Band 2.4 GHz	Yes	Yes
Frequency Band 5 GHz	Yes	Yes
Wireless Bandwidth	20/40/80MHz	20/40/80MHz
Transmit Output Power	Depends on country code	Depends on country code
Dimensions	183.5 x 105 x 143.5	68 x 100 x 175.5
Weight	1.44	0.44
Operating Temperature	0°C ~ +40°C	0°C ~ +40°C
Operating Humidity	5% to 95% non-condensing	5% to 95% non-condensing
Certifications	JATE / CE / FCC / BSMI / NCC / IC / SRRC / CCC / VCCI / RCM / OFCA	JATE / CE / FCC / BSMI / NCC / IC / SRRC / VCCI / RCM / OFCA
Wi-Fi Mesh	Yes (with Tri-Band)	Yes (with Tri-Band)
QNAP SD-WAN solution, QuWAN	Yes	Yes
Drive Bay	2 x 2.5-inch SATA 3Gb/s(Compatible with 6Gb/s SSD/HDD)	-




External Enclosures (DAS)

Flexible and economical
storage expansion

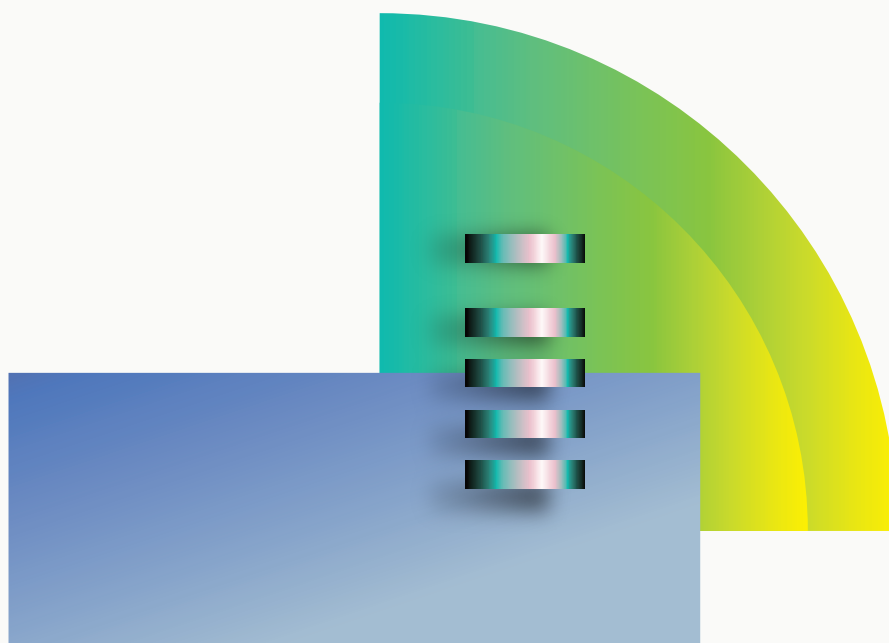

	TL-D800C	TL-R1200C-RP
		
Model	TL-D800C	TL-R1200C-RP
CPU	-	-
Drive Bay	8 x 3.5-inch SATA 6Gb/s, 3Gb/s	12 x 3.5-inch SATA 6Gb/s, 3Gb/s
Hot-swappable	-	-
Gigabit Ethernet Port (RJ45)	-	-
Audio Alert On/Off Switch	Yes	Yes
Form Factor	Tower	2U Rackmount
Host Interface	1 x USB 3.2 Gen 2 Type-C	1 x USB 3.2 Gen 2 Type-C
Dimensions (HxWxD)	188.2 x 329.3 x 281.4	88.6 x 482 x 562.5
Weight (Net)	6.18	11.03
Max. number of HDDs/SSDs supported	8	12
Hard Drive Type	3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives	3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	250W PSU, 100 - 240V	250W(x2) PSU, 100 - 240V
Power Consumption: Operating Mode, Typical	48.4	82.26
Fan Mode Switch	Yes (Auto, high, medium, low)	Yes (Auto, high, medium, low)
Fan	2 x 120mm, 12VDC	2 x 70mm, 12VDC
Kensington Security Slot	Yes	-
Management	-	-





TL-D400S		TL-D800S	
			
TL-D400S		TL-D800S	
-		-	
4 x 3.5-inch SATA 6Gb/s, 3Gb/s		8 x 3.5-inch SATA 6Gb/s, 3Gb/s	
-		-	
-		-	
Yes		Yes	
Tower		Tower	
1 x SFF-8088		2 x SFF-8088	
168.5 x 160.2 x 219		188.2 x 329.3 x 279.6	
3.66		6.17	
4		8	
3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives		3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives	
0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)	
65W adapter, 100 - 240V		250W PSU, 100 - 240V	
22.985		51.606	
Yes (Auto, high, medium, low)		Yes (Auto, high, medium, low)	
1 x 120mm, 12VDC		2 x 120mm, 12VDC	
Yes		Yes	
-		-	

	TL-D1600S	TL-R400S	
			
Model	TL-D1600S	TL-R400S	
CPU	-	-	
Drive Bay	12 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s	4 x 3.5-inch SATA 6Gb/s, 3Gb/s	
Hot-swappable	-	-	
Gigabit Ethernet Port (RJ45)	-	-	
Audio Alert On/Off Switch	Yes	Yes	
Form Factor	Tower	1U Rackmount	
Host Interface	4 x SFF-8088	1 x SFF-8088	
Dimensions (HxWxD)	303.84 x 369.89 x 319.8	43.9 x 438.9 x 291.1	
Weight (Net)	11.59	3.98	
Max. number of HDDs/SSDs supported	16	4	
Hard Drive Type	3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives (for 3.5-inch tray slots only) 2.5-inch SATA solid state drives	3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives	
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)	
Power Supply Unit	250W PSU, 100 - 240V	100W PSU, 100 - 240V	
Power Consumption: Operating Mode, Typical	93.66	25.07	
Fan Mode Switch	Yes (Auto, high, medium, low)	Yes (Auto, high, medium, low)	
Fan	3 x 92mm, 12VDC	2 x 40mm, 12VDC	
Kensington Security Slot	Yes	Yes	
Management	-	-	





	TL-R1200S-RP	TL-R1220Sep-RP
		
	TL-R1200S-RP	TL-R1220Sep-RP
	-	-
	12 x 3.5-inch SATA 6Gb/s, 3Gb/s	12 x 3.5-inch SAS 12Gb/s, SAS/SATA 6Gb/s
	-	Yes
	-	-
	Yes	-
	2U Rackmount	2U Rackmount
	3 x SFF-8088	4 x 12Gb/s SAS 3.0 wide ports (4-wide port) Mini-SAS HD (SFF-8644)
	88.6 x 482 x 562.5	88.65 x 482.2 x 423.8
	9.49	9.19
	12	12
	3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives	3.5" or 2.5" SAS 12Gb/s, SAS/SATA 6Gb/s and 3Gb/s drives
	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
	250W(x2) PSU, 100 - 240V	300W (x2), 100 - 240V
	73.7	163.38
	Yes (Auto, high, medium, low)	-
	2 x 70mm, 12VDC	2 x 80mm, 12VDC
	Yes	-
	-	Managed via QNAP QTS / QuTS hero OS 1. Supports disk S.M.A.R.T. information 2. RAID expansion enclosure identifier 3. Locate RAID expansion enclosures 4. Locate hard disks on RAID expansion enclosure 5. Smart fan control by detecting system and hard drive temperature 6. In-band SAS firmware update

	TL-R1620Sep-RP	TL-R1620Sdc
		
Model	TL-R1620Sep-RP	TL-R1620Sdc
CPU	-	-
Drive Bay	16 x 3.5-inch SAS 12Gb/s, SAS/SATA 6Gb/s	16 x 3.5-inch SAS 12Gb/s, SAS/SATA 6Gb/s
Hot-swappable	Yes	Yes
Gigabit Ethernet Port (RJ45)	-	1 For console access and CLI.
USB 3.2 Gen 1 port	-	-
USB 3.2 Gen 2 (10Gbps) Port	-	-
Audio Alert On/Off Switch	-	-
Form Factor	3U Rackmount	3U Rackmount
Host Interface	4 x 12Gb/s SAS 3.0 wide ports (4-wide port) Mini-SAS HD (SFF-8644)	3 x 12Gb/s SAS 3.0 wide ports (4-wide port) Mini-SAS HD (SFF-8644) for each controller
Dimensions (HxWxD)	131.3 x 482.2 x 425.3	131.3 x 482.2 x 425.3
Weight (Net)	11.48	12.26
Max. number of HDDs/SSDs supported	16	16
Hard Drive Type	3.5" or 2.5" SAS 12Gb/s, SAS/SATA 6Gb/s and 3Gb/s drives	3.5" or 2.5" SAS 12Gb/s 6Gb/s drives
Operating temperature	0 - 40 °C (32°F - 104°F)	0 - 40 °C (32°F - 104°F)
Power Supply Unit	550W(x2), 100-240V	550W(x2), 100-240V
Power Consumption: Operating Mode, Typical	207.13	212.24
Fan Mode Switch	-	-
Fan	3 x 80mm, 12VDC	3 x 80mm, 12VDC
Kensington Security Slot	-	-
Management	Managed via QNAP QTS / QuTS hero OS 1. Supports disk S.M.A.R.T. information 2. RAID expansion enclosure identifier 3. Locate RAID expansion enclosures 4. Locate hard disks on RAID expansion enclosure 5. Smart fan control by detecting system and hard drive temperature 6. In-band SAS firmware update	Managed via NAS QES OS and JBOD Manager for Windows



TR-002		TR-004	
			
	TR-002		TR-004
	Micro processor with hardware RAID		Micro processor with hardware RAID
	2 x 3.5-inch SATA 6Gb/s, 3Gb/s		4 x 3.5-inch SATA 3Gb/s
	Yes		Yes
	-		-
	-		1 x Type-C USB 3.0 (USB 3.2 Gen 1)
	1 x Type-C USB 3.2 Gen 2 10Gbps		-
	-		-
	Tower		Tower
	-		-
	168.5 x 102 x 219		168.5 x 160.2 x 219
	1.37		1.85
	2		4
	2 x 2.5-inch or 3.5-inch SATA 6Gb/s		4 x 2.5-inch or 3.5-inch SATA 3Gb/s
	0 - 40 °C (32°F - 104°F)		0 - 40 °C (32°F - 104°F)
	External Power Adapter, 36W, 100-240V		External Power Adapter, 65W, 100-240V
	10.15		18.21
	-		-
	1 x 70mm, 12VDC		1 x 120mm, 12VDC
	Yes		Yes
	-		-






	TR-004U
	
Model	TR-004U
CPU	Micro processor with hardware RAID
Drive Bay	4 x 3.5-inch SATA 3Gb/s
Hot-swappable	Yes
Gigabit Ethernet Port (RJ45)	-
USB 3.2 Gen 1 port	1 x Type-C USB 3.0 (USB 3.2 Gen 1)
USB 3.2 Gen 2 (10Gbps) Port	-
Audio Alert On/Off Switch	-
Form Factor	1U Rackmount
Host Interface	-
Dimensions (HxWxD)	44 x 439 x 291
Weight (Net)	4.03
Max. number of HDDs/ SSDs supported	4
Hard Drive Type	4 x 2.5-inch or 3.5-inch SATA 3Gb/s
Operating temperature	0 - 40 °C (32°F - 104°F)
Power Supply Unit	Open-frame 100W, Input: 100V-240V ~ / 3.5A, 50Hz-60Hz
Power Consumption: Operating Mode, Typical	18.9
Fan Mode Switch	-
Fan	2 x 40mm, 12VDC
Kensington Security Slot	Yes
Management	-







Accessories


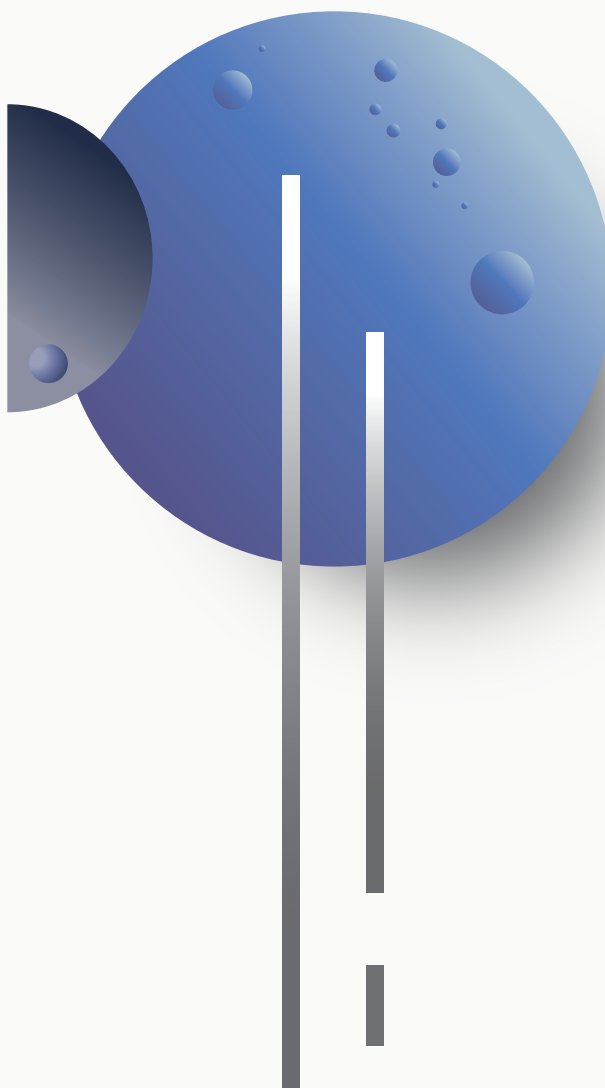
Versatile feature-rich
accessories to enhance
the performance
of your system





	QM2-2P2G2T	QM2-2P10G1TB	
			
Model	QM2-2P2G2T	QM2-2P10G1TB	
description	Dual M.2 2280 SATA SSD & dual-port 2.5GbE expansion card	Dual M.2 2280 PCIe NVMe SSD & single-port 10GbE expansion card	



	QDA-UMP4	QDA-U2MP	
			
Model	QDA-UMP4	QDA-U2MP	
description	Use an M.2 PCIe NVMe SSD in a U.2 PCIe NVMe SSD drive bay for PC and NAS	Use two M.2 PCIe NVMe SSD in a U.2 PCIe NVMe SSD drive bay for PC and NAS	



	QXP-1600eS-A1164	QXP-10G2U3A	
			
Model	QXP-1600eS-A1164	QXP-10G2U3A	
description	16-port SATA expansion card	USB 3.2 Gen 2 dual-port PCIe expansion card	



	QXP-T32P	QXP-820S-B3408	
			
Model	QXP-T32P	QXP-820S-B3408	
description	Dual-port Thunderbolt™ 3 Expansion Card	Dual-port External SAS 12Gb/s storage expansion card	



	QXP-1620S-B3616W	
		
Model	QXP-1620S-B3616W	
description	Quad-port External SAS 12Gb/s storage expansion card	







	QM2-2P410G1T	QM2-2P410G2T
		
	QM2-2P410G1T	QM2-2P410G2T
	Dual M.2 2280 PCIe Gen4 NVMe SSD & single-port 10GbE expansion card	Dual M.2 2280 PCI Express 4.0 NVMe SSD & dual-port 10GbE expansion card



	QDA-A2AR	QDA-A2MAR
		
	QDA-A2AR	QDA-A2MAR
	Use two 2.5-inch SATA drives in a single 3.5-inch SATA drive bay with RAID support for PC and NAS	Use two M.2 SATA SSDs in a single 2.5-inch SATA drive bay with RAID support for PC and NAS



	QXP-400eS-A1164	QXP-800eS-A1164
		
	QXP-400eS-A1164	QXP-800eS-A1164
	Quad-port SATA expansion card (1 x SFF-8088)	8-port SATA expansion card (2 x SFF-8088)


	QXP-16G2FC	QXP-32G2FC
		
	QXP-16G2FC	QXP-32G2FC
	Dual-port 16Gb Enhanced Gen 5 Fibre Channel expansion card with SFP+ transceivers	Dual-port 32Gb Gen 6 Fibre Channel expansion card with SFP+ transceivers


	QXG-10G1TB	QXG-10G2TB	
			
Model	QXG-10G1TB	QXG-10G2TB	
description	Single-port, 5-speed 10 GbE network expansion card	Dual-port, 5-speed 10 GbE network expansion card	



	QXG-2G1T-I225	QXG-2G2T-I225	
			
Model	QXG-2G1T-I225	QXG-2G2T-I225	
description	Single-port 2.5 GbE network expansion card	Dual-port 2.5 GbE network expansion card	



	QXG-5G2T-111C	QXG-5G4T-111C	
			
Model	QXG-5G2T-111C	QXG-5G4T-111C	
description	Dual-port, 4-speed 5 GbE network expansion card	Quad-port, 4-speed 5 GbE network expansion card	


	QNA-UC5G1T	QXG-100G2SF-E810	
			
Model	QNA-UC5G1T	QXG-100G2SF-E810	
description	USB 3.2 Gen 1 to 5GbE Adapter	Dual-port 100 GbE network expansion card	






	QXG-25G2SF-CX6	QXG-10G2T-X710
		
	QXG-25G2SF-CX6	QXG-10G2T-X710
	Dual-port 25 GbE network expansion card	Dual-port, 5-speed 10 GbE network expansion card

	QXG-2G4T-I225	QXG-5G1T-111C
		
	QXG-2G4T-I225	QXG-5G1T-111C
	Quad-port 2.5 GbE network expansion card	Single-port, 4-speed 5 GbE network expansion card

	QNA-T310G1S	QNA-T310G1T
		
	QNA-T310G1S	QNA-T310G1T
	Single-port Thunderbolt 3 to single-port 10GbE SFP+	Single-port Thunderbolt 3 to single-port 10GbE NBASE-T RJ-45

	QXG-100G2SF-CX6
	
	QXG-100G2SF-CX6
	Dual-port 100 GbE network expansion card



*All specifications are subject to change without notice







Smart Video Conferencing Solution

All-in-one: video call,
wireless presentation
and meeting recordings

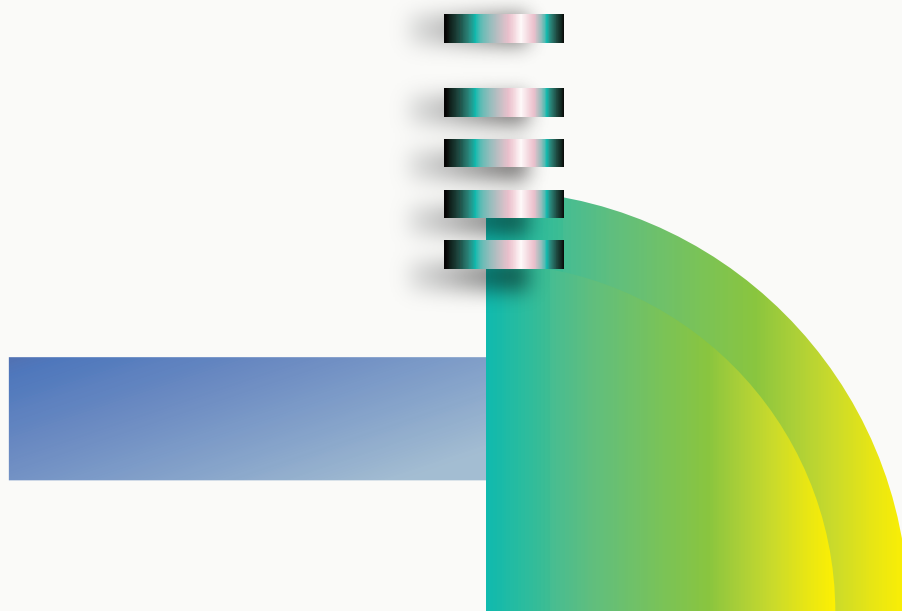






	KoiBox-100W
	
Model	koibox-100w
CPU	Intel® Celeron® dual-core 1.8GHz
System Memory	4GB DDR4
Flash Memory	M.2 2242 SSD 30GB
Drive Bay	1 x 2.5-inch SATA (HDD/SSD not included)
Gigabit Ethernet Port	1 x 1GbE RJ45
Wi-Fi / Bluetooth	Intel Wi-Fi 6 AX201, 802.11ax, Bluetooth 5.2
HDMI Output	1 x HDMI 1.4b output
USB Port	4 x USB 3.2 Gen 2 Type-A
IR sensor	Yes, supports remote controller (RM-IR004)
Buttons	1 x Power button
LED Indicators	Power status (On: blue, Standby: blue breathing light, Off: red)
Power Supply Unit	36W, 100-240V DC, 50/60Hz
Security Slot	1x Kensington security slot
Dimensions (H x W x D)	45 x 232 x 152
Net Weight	1.09 kg (2.4lbs)
Operating Temperature & Relative Humidity	0 ~ 40°C (32°F ~ 104°F) · 5 - 95% RH non-condensing



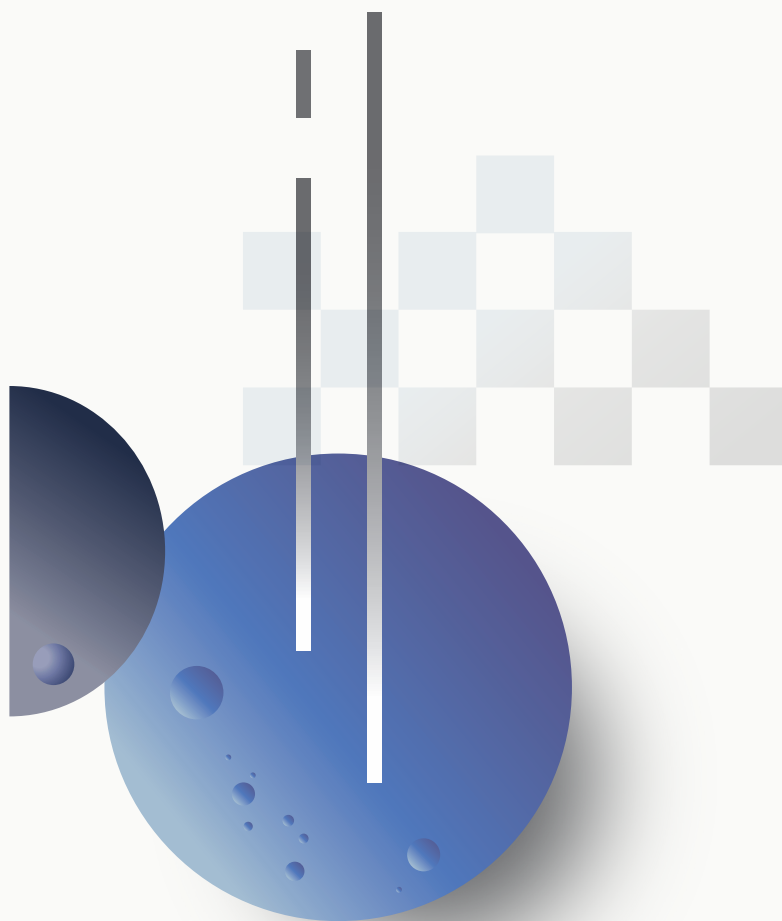

Rapid identification and early warning of targeted ransomware




	QGD-1602P		
			
Model	QGD-1602P-C3758-16G	QGD-1602P-C3558-8G	
Management Type	Web Managed	Web Managed	
PCIe Slot	Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed)	Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed)	
USB 3.2 Gen 1 port	2	2	
USB 2.0 port	-	-	
Management Port	2 x 5GbE ; 2 x 1GbE	2 x 5GbE ; 2 x 1GbE	
USB 3.2 Gen 2 (10Gbps) Port	Optional via PCIe adapter	Optional via PCIe adapter	
HDMI Output	-	-	
Power Supply Description	Internal Power Supply Unit	Internal Power Supply Unit	
Max. Power Consumption	500W	280W	
Input Power Type	AC	AC	
Input Voltage Range	100-240VAC, 50/60 Hz	100-240VAC, 50/60 Hz	
MAC Address Table	32K	32K	
Total Non-Blocking Throughput	48Gbps	48Gbps	
Switching Capacity	96Gbps	96Gbps	
Management Interface	Web	Web	
Energy Efficient Ethernet (IEEE 802.3az complaint)	-	-	
Fan	System: 3 x 4 cm (12V DC)	System: 3 x 4 cm (12V DC)	
Supported Standards	IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5G BASE-T Multi-Gig Ethernet IEEE 802.3an 10GBASE-T 10G Ethernet IEEE 802.3ae 10GBASE-SR IEEE 802.3ae 10GBASE-LR IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization	IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bz 2.5G/5G BASE-T Multi-Gig Ethernet IEEE 802.3an 10GBASE-T 10G Ethernet IEEE 802.3ae 10GBASE-SR IEEE 802.3ae 10GBASE-LR IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization	
Number of Ports	18	18	
10GbE SFP+	2 10G/1G	2 10G/1G	
2.5GbE (RJ45)	8	8	
1GbE (RJ45)	8	8	
1GbE SFP/RJ45 Combo Ports	-	-	
Total PoE Ports	16	16	
PoE PSE (802.3af, 15.4W)	Ports 1-16	Ports 1-16	
PoE+ PSE (802.3at, 30W)	Ports 1-16	Ports 1-16	
PoE++ PSE (802.3bt, 60W)	-	-	
PoE++ PSE (802.3bt, 90W)	Ports 1-4	Ports 1-4	
PoE Power Output	Ports 1-4 (90W), Ports 5-16 (30W)	Ports 1-4 (90W), Ports 5-16 (30W)	
Total PoE Power Budget	370W	200W	
Form Factor	Rackmount	Rackmount	
Dimensions (HxWxD)	44.2 x 435.2 x 327.7	44.2 x 435.2 x 327.7	
Weight (Net)	4.37	4.37	



QGD-1600P



QGD-1600P-8G	QGD-1600P-4G
Web Managed	Web Managed
Slot 1: PCIe Gen2 (x2) Slot 2: PCIe Gen2 (x2)	Slot 1: PCIe Gen2 (x2) Slot 2: PCIe Gen2 (x2)
1	1
2	2
1 x 1GbE	1 x 1GbE
Optional via PCIe adapter	Optional via PCIe adapter
1	1
Internal Power Supply Unit	Internal Power Supply Unit
418W	418W
AC	AC
100-240VAC, 50/60 Hz	100-240VAC, 50/60 Hz
8K	8K
16Gbps	16Gbps
32Gbps	32Gbps
Web	Web
Yes	Yes
System: 2 x 4 cm (12V DC)	System: 2 x 4 cm (12V DC)
IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization	IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3z 1000Base-X IEEE 802.3x Full-duplex flow control IEEE 802.3af/at/bt Power-over-Ethernet (PoE) IEEE 802.1q Virtual LANs (VLAN) IEEE 802.1p QoS Protocol for Traffic Prioritization
16	16
-	-
-	-
14	14
2	2
16	16
Ports 1-16	Ports 1-16
Ports 1-16	Ports 1-16
Ports 1-4	Ports 1-4
-	-
Ports 1-4 (60W), Ports 5-16 (30W)	Ports 1-4 (60W), Ports 5-16 (30W)
360W	360W
Rackmount	Rackmount
47.2 x 436.2 x 326.2	47.2 x 436.2 x 326.2
4.41	4.41



QNAP

QNAP SYSTEMS, INC.

TEL : +886-2-2641-2000 FAX: +886-2-2641-0555
Email: qnapsales@qnap.com
Address : 3F, No.22, Zhongxing Rd., Xizhi Dist., New Taipei City, 221, Taiwan

www.qnap.com

Netherlands (Warehouse Services)

Email: nlsales@qnap.com
TEL: +31(0)107600830

China

Email: cnsales@qnap.com
TEL: +86-400-028-0079

Thailand

Email: thsales@qnap.com
TEL: +66-2-5415988

Japan

Email: jpsales@qnap.com
FAX: 03-6435-9686

US

Email: usasales@qnap.com
TEL: +1-909-595-2782

India

Email: indiasales@qnap.com

Germany

Email: desales@qnap.com

France

Email: frsales@qnap.com



P/N: 51000-025108-RS
202209 (EN)A

QNAP may make changes to specification and product descriptions at any time, without notice. Copyright © 2022 QNAP Systems, Inc. All rights reserved.

QNAP® and other names of QNAP Products are proprietary marks or registered trademarks of QNAP Systems, Inc. Other products and company names mentioned herein are trademarks of their respective holders.