



**Stay
one
step
ahead**

Product Selection Guide
2024

High-performance ZFS-based OS with greater reliability

QNAP's "QuTS hero" operating system combines the app-based QTS with a 128-bit ZFS file system to provide flexible storage management, comprehensive data protection and optimized performance to meet the needs of business-critical applications.

ZFS Efficient data reduction technology

Inline data deduplication is block-based and runs before data is written to storage. This greatly optimizes storage usage while significantly decreasing storage capacity requirements. Coupled with inline compression and inline compaction technologies, ZFS significantly reduces the overall storage footprint - especially helpful for increasing SSD storage efficiency when highly-repetitive data or massive small files are generated.

Near-limitless, instant snapshots

ZFS supports up to 65,535 snapshots for iSCSI LUN and shared folders to accomplish well-rounded snapshot versioning. If 1 snapshot is created every hour, 24 snapshots per day, then up to 7 years of snapshots can be created without needing to delete any!

Up to petabyte capacity per shared folder

The 128-bit ZFS filesystem has huge capacity potential and supports native handling of standard RAID levels and additional ZFS RAID layouts (RAID Z). ZFS-based QNAP storage solutions provide up to 5 PB capacity for individual shared folders, enabling enterprises to tackle storage-demanding applications



QuTS hero



Real-time SnapSync

The advanced block-based real-time SnapSync ensures that the primary NAS and the secondary NAS always keep the same data, providing the strongest support for nonstop business operations and helping users remove the risk of data loss!

Embrace the ultra-high-speed 100GbE network generation

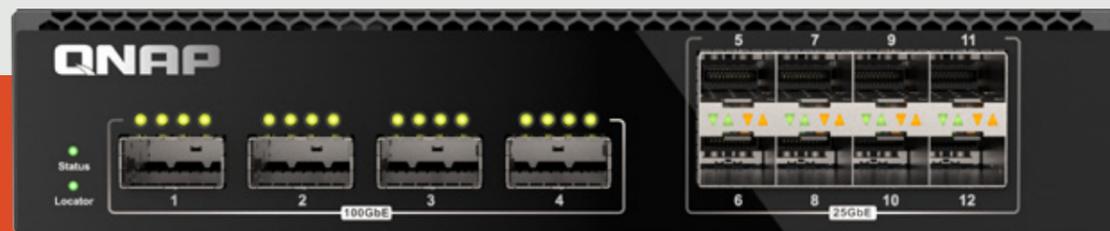
According to market research, the demand for 100GbE switches has taken off in 2023. Enterprises, hyperscalers, and service providers worldwide continue to invest in higher-speed network infrastructure to support higher-speed servers and higher bandwidth demands of new applications such as Generative AI workloads.

Half-width rackmount 100GbE managed switch

The QSW-M7308R-4X is a 100GbE L2 Managed Switch with four 100GbE QSFP28 and eight 25GbE SFP28 ports. Offering up to 1200Gbps of switching capacity in a compact half-width rackmount case, the QSW-M7308R-4X satisfies the high-bandwidth demands of big data storage, video editing, virtualization, and AI applications to accelerate deploying high-speed data storage centers, smart medicine, and professional multimedia studios.

100GbE network expansion card

The QNAP dual-port 100GbE network expansion card is designed to support PCIe 4.0 and delivers an impressive 100Gbps bandwidth to overcome performance bottlenecks. Its low latency makes it ideal for bandwidth-demanding applications such as data centers, virtualization, multimedia streaming, and transfer, as well as mission-critical backup and restore tasks.



High-speed 25GbE networking

Enable lightning-fast throughput for bandwidth-demanding tasks such as virtualization, massive data transmission, and fast backup/restoration



25GbE-ready All-flash NAS


The TS-h2490FU provides a built-in dual-port 25GbE SFP28 SmartNIC with the NVIDIA® Mellanox ConnectX-6 Lx SmartNIC controller that supports iSCSI Extensions for RDMA (iSER) to increase performance of data transfer between NAS and ESXi server and offload CPU workloads.

Affordable 25GbE managed switch

The QSW-M5216-1T is a 25GbE Layer 2 web managed switch that provides flexible network interfaces for high compatibility at an affordable price, enabling small businesses to quickly upgrade to a high-speed backbone network by integrating to existing network infrastructure.

10GbE connectivity: The future is now!

10GbE connectivity improves overall network performance and everyday tasks with ten times the bandwidth of 1GbE. By offering 10GbE-ready NAS, network adapters and switches, QNAP is a one-stop provider for everything you need to create your own 10GbE environment.



10GbE NAS solutions

QNAP provides a range of NAS with integrated hardware and software solutions that can make the most of the incredible bandwidth provided by 10GbE networks.



10GbE switches

QNAP's QSW Series 10GbE switches supports 10GBASE-T and NBASE-T standards, allowing you to take advantage of higher network speeds with existing Cat 5e and 6a cables. Both SFP+ (fiber) and RJ45 (copper) ports are available for servicing a range of network needs.



10GbE Expansion Cards & Adapters

Upgrading NAS, laptop/PC, and workstation network speeds has never been easier. Simply use a 10GbE expansion card, Thunderbolt™ to 10GbE adapter, or QM2 expansion card to empower your device with faster network connectivity.

2.5GbE is not just for offices, but also for homes

The lack of consumer-grade switches has made it hard for home and personal users to adopt 2.5GbE/5GbE networking. QNAP now offers cost-effective multi-port switches that support 10G/5G/2.5G/1G/100M Ethernet, helping you to transform your home network at a wallet-friendly price.



2.5GbE switches

QNAP offers a 10GbE switch series supporting five speeds (10G / 5G / 2.5G / 1G / 100M) and a 2.5GbE switch series. With 2.5GbE ports, the QNAP switch can instantly upgrade your network to take advantage of 2.5GbE-enabled devices and NAS.



Works with existing cables

No special cables or connectors are required to take advantage of 2.5GbE. Simply use your existing CAT5e cables as normal with your new 2.5GbE infrastructure.



2.5 times faster

2.5GbE is 2.5 times faster than standard Ethernet (1GbE), increasing network performance to boost productivity.



More affordable

If you can't budget a 10GbE upgrade at this time, the more affordable 2.5GbE provides a notable improvement in current Ethernet speeds.



Breakthrough performance and outstanding connectivity with Thunderbolt™ NAS



QNAP offers the very best in connectivity with Thunderbolt™ NAS. Thunderbolt™ NAS is far superior in providing both the best in speed and versatility that non-Thunderbolt™ NAS cannot offer, video production professionals using QNAP Thunderbolt™ NAS enjoy efficient workflows, unprecedented speed, and incredible versatility.

Ultra-high speed transfer

Edit right off your NAS with blazing fast Thunderbolt™ 4 connectivity. With potential speeds of up to 40Gbps, connect your compatible Macs and other Thunderbolt™ 4 devices directly to the NAS and work unaffected by other network traffic.

High-efficiency collaboration

Connect the Thunderbolt NAS to multiple Thunderbolt™-enabled Mac® and Windows® workstations to optimize your 4K media workflows, file storage and sharing.

High availability with USB Type-C

The usage of USB Type-C by Thunderbolt™ 4 provides a universal connection from QNAP NAS to Thunderbolt™ devices as well as countless USB Type-C devices through a single cable, allowing file sharing and centralized data storage without the hassle of stringing multiple cables.

Daisy chain multiple Thunderbolt™ accessories

Not having enough USB ports on your Windows/Mac computer is now a thing of the past. Thunderbolt™ docking and USB devices, such as your keyboard and mouse, can be connected to a USB-C port on one of the five daisy-chained Thunderbolt™ NAS and passed through to your computer.

myQNAPcloud Storage

Back up your NAS data to a trusted cloud hosted by QNAP. myQNAPcloud Storage is designed for QNAP users to easily carry out off-site backup to meet disaster recovery requirements.

Works perfectly with QNAP backup solutions

myQNAPcloud Storage is supported by QNAP NAS hybrid cloud solutions, such as Hybrid Backup Sync and HybridMount, allowing you to easily perform backup, recovery, mount, and sync tasks.

Worldwide coverage with 12 data centers

myQNAPcloud Storage provides users with a faster service experience. For multinational enterprises, these data centers can be used for effective data utilization between headquarters and branches.

myQNAPcloud Storage as a file drive

myQNAPcloud Storage supports most file types, including Microsoft Office, iWork, Adobe, and RAW image formats. Images and videos are not compressed or processed, making myQNAPcloud Storage suitable for storing high-resolution media content.

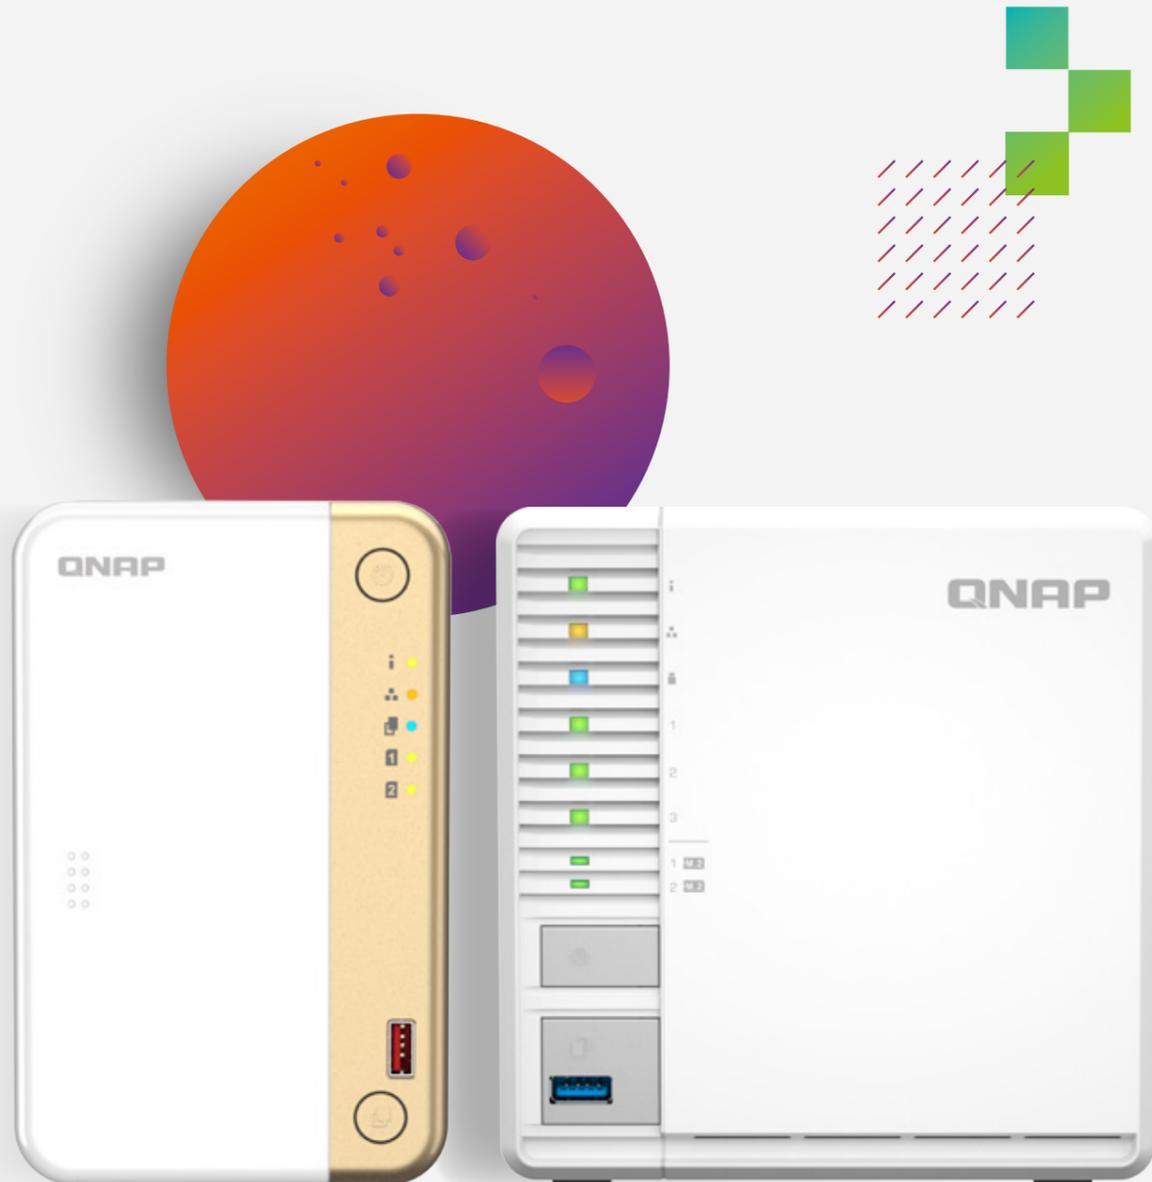
No costs for data transmission

myQNAPcloud Storage is remarkably cheaper than Amazon S3, Microsoft Azure, and Google Cloud. We only charge for storage space, with transmitting data being completely free. myQNAPcloud Storage is the ideal solution for multinational enterprises which are handling large amounts of data.



Easily build your personal cloud and access anywhere

In contrast to the limited storage space and potential security issues with public cloud services, the QNAP NAS is advantageous for establishing a secure and large-capacity personal cloud.



An easy-to-use, all-in-one backup solution

The QNAP NAS can do many things, but at its heart is a complete backup solution to protect your files and data. By regularly backing up your files and device content, you can make data loss a thing of the past.



Greater multimedia enjoyment

The QNAP NAS comes with a wide range of media applications, including Photo Station, Video Station and Music Station, allowing you to easily manage and view your media files.



Easy and secure remote connection with myQNAPcloud

myQNAPcloud allows you to remain connected to your QNAP NAS using a unique domain name. No complex routing or configuration is required, and myQNAPcloud strengthens SSL Certificate keys to 2048-bits to enable secure remote access, management, and sharing files and check your system status from anywhere.



A secure backup center with snapshot protection

Snapshots are essential for NAS data protection, and their block-level feature makes it a dependable data protection method in the face of growing ransomware threats.



Connect to a TV or monitor with HDMI

With HDMI output, the QNAP NAS allows you to directly enjoy multimedia content, use web browsers, manage your NAS, or watch recorded surveillance footage or live feeds on your NAS.





ADRA Network Detection and Response (NDR) appliances

The QNAP ADRA series Network Detection and Response (NDR) appliances selectively screen network traffic and detect malware lateral movement, stopping hostile activities before data leakage and encryption can occur.



ADRA The rapid-screening ADRA NDR cybersecurity appliances

The ADRA NDR precisely pinpoint malware activities on your local network without impacting performance. The proprietary rapid-screening mechanism employed in the ADRA NDR detects potentially malicious activities based on a set of criteria and responds to these anomalies according to defined policies. This greatly improves the security of your network without impacting performance.



Threat detection

The ADRA NDR is equipped with deep analysis features that allow in-depth inspections for malware and vulnerability exploits. The ADRA NDR is also capable of simulating a threat trap for malware to initiate attacks. Once the malware becomes active, hostile behaviors will be detected by the cybersecurity appliance and actions will be taken.



Threat analysis

Once suspicious activities are captured by Threat Detection, network traffic packets are analyzed against a collection of rules to determine the attack type. Different detection events over time will be evaluated against each other to determine their relations as an additional criterion for evaluating associated risk levels.



Threat response

Automatically isolate affected devices only to contain the malware attack to a smaller range, without shutting down the entire network. IT administrators can take a series of actions (such as isolating or temporarily allowing) to flexibly tackle operational needs.

QuWAN SD-WAN solution for resilient IT infrastructure

QNAP's QuWAN SD-WAN solution features Auto Mesh VPN, SAML SSO, IPsec encryption, cloud-centric management and QVPN Service for multi-site network. Compatible with a wide range of QNAP products and Hypervisor Platforms such as VMware ESXi, QuWAN enables SMBs to efficiently build a dependable network at a cost-effective price, and to facilitate digital transformation, multi-site expansion and remote working.



SSO Convenient SSO login

QuWAN supports Authentication Server and SAML SSO to allow users to join VPN with a single company email login easily and conveniently.



WAN optimization

QuWAN adopts load balancing technologies to combine the bandwidth of different ISPs and to prioritize bandwidth utilization.

QuWAN Cloud management

The QuWAN Orchestrator provides powerful and convenient central network management.



Cost optimization

Optimizes fiber/network transmission to lower the cost of VPN equipment and bandwidth expenses.



Network security

Adopts Deep Packet Inspection to analyze L7-Payloads for content information from websites and devices.



Auto mesh VPN

Automatically establishes a mesh VPN and removes the need for manual static VPN settings.

Next-generation intelligent IP surveillance and remote backup solution

With the subscription-based QVR Elite smart surveillance solution you only pay for the channel licenses you need, allowing you to affordably safeguard your property. You can arrange a dedicated, independent storage space for surveillance data on the QNAP NAS and enjoy simplified camera management, storage space allocation, camera live viewing and playback. Recordings are saved as MP4 files for playback on nearly every device.

Direct monitoring on an HDMI display

Easily play recordings with a connected HDMI display using the QVR Smart Client. Search for event recordings within a time period and detection area specified in the user interface.



Leverage AI-based applications for value-added services

QVR Elite's surveillance footage can be processed by multiple QNAP AI-based video analytics applications (e.g. QVR Face, QVR Human, QVR DoorAccess) to empower your surveillance systems with smart door access, facial recognition, human counting capabilities and more.



QVR Pro Client: Centralized monitoring and management

QVR Pro Client enables you to monitor multiple channels simultaneously. Flexibly switch between live view and playback mode to easily fulfill centralized monitoring and management.



Records using the MP4 video format

QVR Elite records video files in the universally-supported MP4 format, allowing for smooth playback on all your devices. In addition, you can conveniently back up recordings to other QTS / QuTS hero NAS or Cloud storage space using Hybrid Backup Sync or HybridMount.



Easy capacity expansion

You can create multiple recording spaces for QVR Elite recordings. If you run out of storage space, you can easily expand your NAS storage by connecting to QNAP expansion enclosures.



Low cost: flexible subscription plan

QVR Elite is subscription-based, with monthly, yearly, and 3-year subscription plans. You can build a robust surveillance system with a low-cost monthly price of US \$1.99 per channel. You can alter the subscription based on your needs to reach higher cost efficiency.



QNAP Product Lineup

Dual Controller



ES1686dc

ES2486dc

All flash NAS



TS-h1090FU

TS-h3077AFU

TS-h2490FU

TDS-h2489FU

TS-h1290FX

25GbE NAS Solution



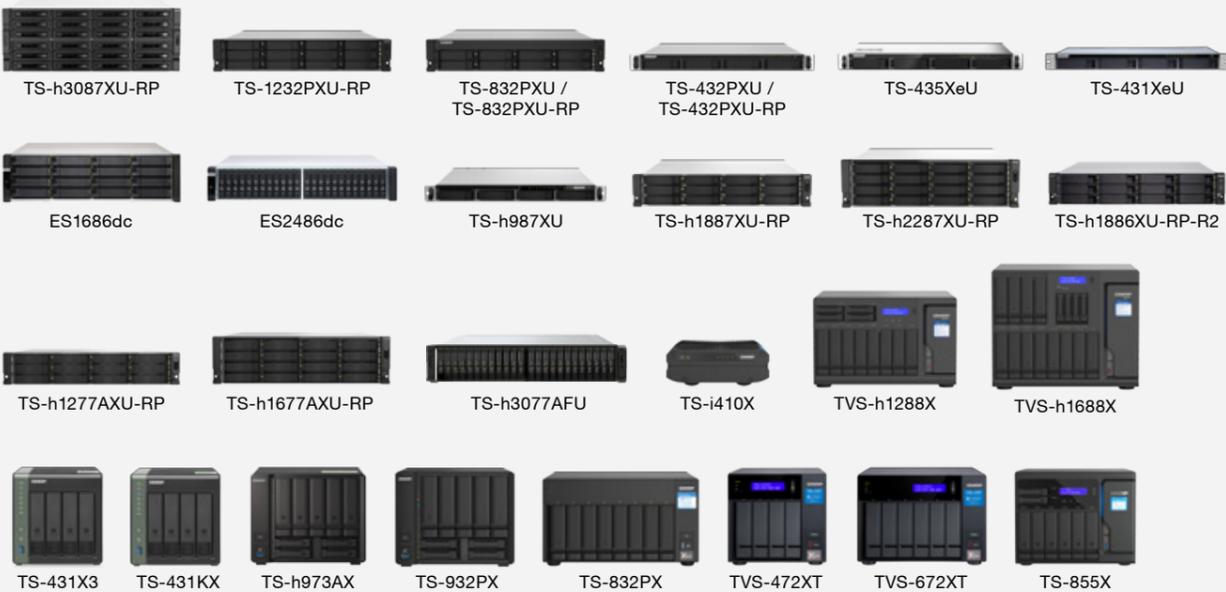
TS-h1090FU

TS-h2490FU

TDS-h2489FU

TS-h1290FX

10GbE NAS Solution



TS-h3087XU-RP

TS-1232PXU-RP

TS-832PXU / TS-832PXU-RP

TS-432PXU / TS-432PXU-RP

TS-435XeU

TS-431XeU

ES1686dc

ES2486dc

TS-h987XU

TS-h1887XU-RP

TS-h2287XU-RP

TS-h1886XU-RP-R2

TS-h1277AXU-RP

TS-h1677AXU-RP

TS-h3077AFU

TS-i410X

TVS-h1288X

TVS-h1688X

TS-431X3

TS-431KX

TS-h973AX

TS-932PX

TS-832PX

TVS-472XT

TVS-672XT

TS-855X

2.5GbE NAS Solution



TS-h1277AXU-RP

TS-h1677AXU-RP

TS-h3077AFU

TS-464eU

TS-864eU / TS-864eU-RP

TS-464U / TS-464U-RP

TS-873AeU / TS-873AeU-RP

TS-855eU / TS-855eU-RP

TS-1273AU-RP

TS-1264U-RP

TS-1673AU-RP

HS-264

TBS-464

TS-216G

TS-433

TS-364-8G

TS-262

TS-462

TS-264

TS-464

TS-664

TS-A1642

TS-253E

TS-453E

TS-h686

TS-h886

TVS-h474

TVS-h674

TVS-h874

TVS-h674T

TVS-h874T

TS-473A

TS-673A

TS-873A

TVS-675

TS-1655

TS-410E

Thunderbolt NAS Solution



TVS-h1288X

TVS-h1688X

TVS-472XT

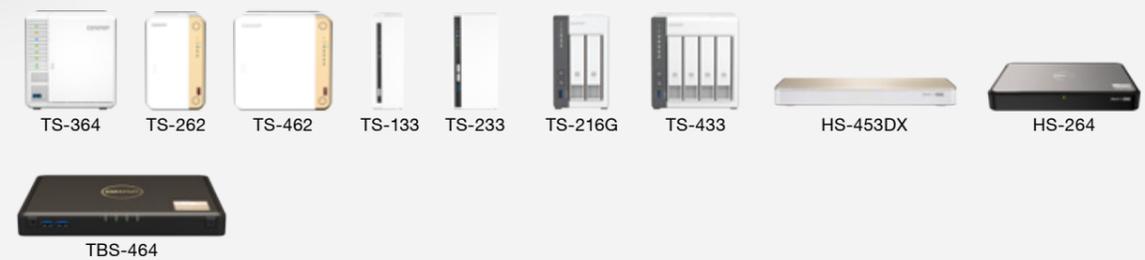
TVS-672XT

TVS-h674T

TVS-h874T

TBS-h574TX

Personal Cloud



TS-364

TS-262

TS-462

TS-133

TS-233

TS-216G

TS-433

HS-453DX

HS-264

TBS-464

External Enclosures (DAS)



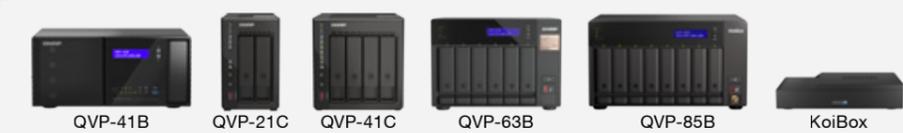
Managed & Unmanaged Switch Series




Router



Surveillance & Smart Video



SD-WAN & ADRA Solution

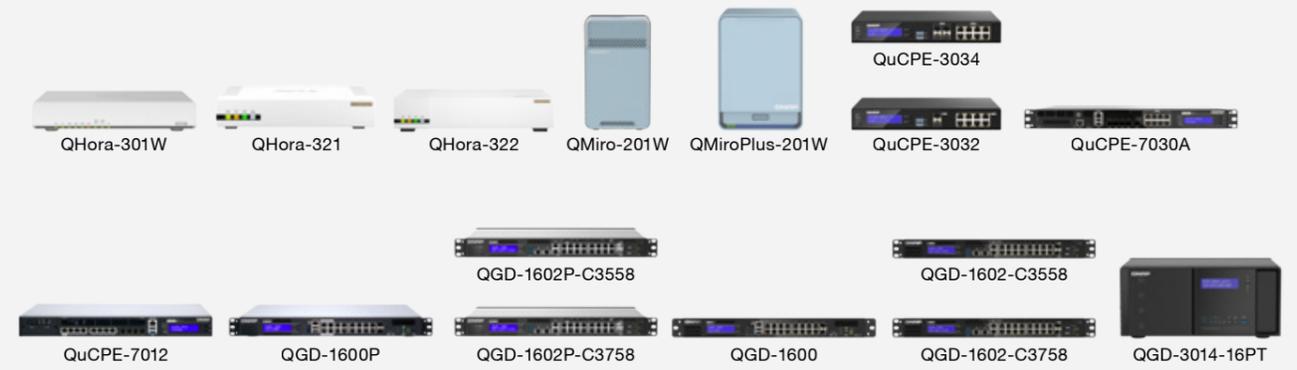

Accessories



High-performance
ZFS-based OS
with greater reliability

ES1686dc



| Model | ES1686dc-2142IT-128G | ES1686dc-2142IT-96G | ES1686dc-2123IT-64G |
|---|--|---|--|
| Operating System | QES | | |
| CPU | Intel® Xeon® D-2142IT 8-core 1.90 GHz processor (burst up to 3.0 GHz) per controller | | Intel® Xeon® D-2123IT 4-core 2.20 GHz processor (burst up to 3.0 GHz) per controller |
| System Memory | 64 GB RDIMM DDR4 ECC (4 x 16 GB) per controller max 512 GB | 48 GB RDIMM DDR4 ECC (4 x 4 GB+4 x 8GB) per controller max 512 GB | 32 GB RDIMM DDR4 ECC (4x 8 GB) per controller max 512 GB |
| Drive Bay | 16 x 3.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s | | |
| M.2 Slot | - | | |
| Gigabit Ethernet Port (RJ45) | 3 for each controller (one for remote management) | | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | - | | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | | |
| 10 Gigabit Ethernet Port | 4 x 10GbE SFP+ for each controller | | |
| 25 Gigabit Ethernet Port | - | | |
| PCIe Slot | 2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU) | | |
| USB 3.2 Gen 1 port | 2 per each controller | | |
| HDMI Output | - | | |
| Dimensions (HxWxD mm) | 132 x 483.05 x 630.62 | | |

ES2486dc



| Model | ES2486dc-2142IT-128G | ES2486dc-2142IT-96G |
|---|---|---|
| Operating System | QES | |
| CPU | Intel® Xeon® D-2142IT 8-core 1.90 GHz processor, up to 3.0 GHz | |
| System Memory | 64 GB RDIMM DDR4 ECC (4 x 16 GB) per controller max 512 GB | 48 GB RDIMM DDR4 ECC (4 x 4 GB+4 x 8GB) per controller max 512 GB |
| Drive Bay | 24 x 2.5-inch SAS 12Gb/s, backward-compatible to SAS 6Gb/s | |
| M.2 Slot | - | |
| Gigabit Ethernet Port (RJ45) | 3 for each controller (one for remote management) | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | - | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | |
| 10 Gigabit Ethernet Port | 4 x 10GbE SFP+ for each controller | |
| 25 Gigabit Ethernet Port | - | |
| PCIe Slot | 2 Slot 1: PCIe Gen 3 x8 (CPU) Slot 2: PCIe Gen 3 x8 (CPU) | |
| USB 3.2 Gen 1 port | 2 per each controller | |
| HDMI Output | - | |
| Dimensions (HxWxD mm) | 88.3 x 483 x 545.1 | |

All flash storage.
ultimate performance




| TDS-h2489FU | | | |
|---|---|--|---|
|  | | | |
| Model | TDS-h2489FU-4314-1TB (By Request) | TDS-h2489FU-4314-512G (By Request) | TDS-h2489FU-4314-256G |
| Operating System | QTS / QuTS hero | | |
| CPU | 2 x Intel® Xeon® Silver 4314 16-core/32-thread processor, up to 3.4 GHz | | 2 x Intel® Xeon® Silver 4314 16-core/32-thread processor, up to 3.4 GHz |
| System Memory | 1 TB RDIMM DDR4 ECC (32 x 32 GB) max 1 TB | 512 GB RDIMM DDR4 ECC (16 x 32 GB) max 1 TB | 256 GB RDIMM DDR4 ECC (8 x 32 GB) max 1 TB |
| Memory Slot | 32 x RDIMM DDR4 ECC (16 x slots per socket) | | |
| Drive Bay | 24 x 2.5-inch | | |
| M.2 Slot | 2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s | | |
| Gigabit Ethernet Port (RJ45) | - | | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 4 (2.5G/1G/100M/10M) | | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | | |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | | |
| 25 Gigabit Ethernet Port | 2 x 25GbE SFP28 SmartNIC port | | |
| PCIe Slot | 2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 | | |
| USB | 4 x USB 3.2 Gen 1 | | |
| HDMI Output | - | | |
| Dimensions (HxWxD mm) | 88.3 x 446.2 x 713.2 | | |

| TDS-h2489FU | | | |
|---|---|---|--|
|  | | | |
| Model | TDS-h2489FU-4314-128G | TDS-h2489FU-4309Y-64G | |
| Operating System | QTS / QuTS hero | | |
| CPU | 2 x Intel® Xeon® Silver 4314 16-core/32-thread processor, up to 3.4 GHz | 2 x Intel® Xeon® Silver 4309Y 8-core/16-thread processor, up to 3.6 GHz | |
| System Memory | 128 GB RDIMM DDR4 ECC (8 x 16 GB) max 1 TB | 64 GB RDIMM DDR4 ECC (8 x 8 GB) max 1 TB | |
| Memory Slot | 32 x RDIMM DDR4 ECC (16 x slots per socket) | | |
| Drive Bay | 24 x 2.5-inch | | |
| M.2 Slot | 2 Slot 1: M.2 2280 NVMe PCIe Gen 3 x4 or SATA 6Gb/s Slot 2: M.2 2280 NVMe PCIe Gen 3 x2 or SATA 6Gb/s | | |
| Gigabit Ethernet Port (RJ45) | - | | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 4 (2.5G/1G/100M/10M) | | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | | |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | | |
| 25 Gigabit Ethernet Port | 2 x 25GbE SFP28 SmartNIC port | | |
| PCIe Slot | 2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x8 | | |
| USB | 4 x USB 3.2 Gen 1 | | |
| HDMI Output | - | | |
| Dimensions (HxWxD mm) | 88.3 x 446.2 x 713.2 | | |

| | TS-h3077AFU | | | TS-h2490FU | |
|---|--|--|--|--|--|
| |  | | |  | |
| Model | TS-h3077AFU-7700-64G | TS-h3077AFU-7600-32G | | TS-h2490FU-7302P-128G | TS-h2490FU-7232P-64G |
| Operating System | QuTS hero | | | QTS / QuTS hero | |
| CPU | AMD Ryzen™ 7 7700 8-core/16-thread processor, burst up to 5.3 GHz AMD Radeon Graphics | AMD Ryzen™ 5 7600 6-core/12-thread processor, burst up to 5.1 GHz AMD Radeon Graphics | | AMD EPYC™ 7302P 16-core/32-thread processor, up to 3.3 GHz | AMD EPYC™ 7232P 8-core/16-thread processor, up to 3.2 GHz |
| System Memory | 64 GB UDIMM DDR5 (2x 32 GB) max 128 GB | 32 GB UDIMM DDR5 (1x 32 GB) max 128 GB | | 128 GB RDIMM DDR4 ECC (8 x 16 GB) max 1 TB | 64 GB RDIMM DDR4 ECC (8 x 8 GB) max 1 TB |
| Drive Bay | 30 x 2.5-inch SATA 6Gb/s, 3Gb/s | | | 24 x 2.5-inch U.2 PCIe NVMe | |
| M.2 Slot | - | | | - | |
| Gigabit Ethernet Port (RJ45) | - | | | - | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | | | 2 (also support 10M) | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | | | - | |
| 10 Gigabit Ethernet Port | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) | | | - | |
| 25 Gigabit Ethernet Port | - | | | 4 x 25GbE SFP28 SmartNIC port | 2 x 25GbE SFP28 SmartNIC port |
| PCIe Slot | 3 Slot 1: Gen 4 x 4 Slot 2: Gen 4 x 8 or Gen 4 x 4 Slot 3: Gen4 x 4 | | | 5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 | 5 Slot 1: PCIe Gen4 x4 Slot 2: PCIe Gen4 x8 or x4 Slot 3: PCIe Gen4 x4 Slot 4: PCIe Gen4 x8 Slot 5: PCIe Gen4 x16 or x8 |
| USB | 2 x Type-A USB 3.2 Gen 2 10Gbps | | | 2 x USB 3.2 Gen 1 port | |
| HDMI Output | - | | | - | |
| Dimensions (HxWxD mm) | 88.3 x 482 x 549.7 | | | 88.3 x 480.97 x 510.23 | |

| | TS-h1090FU | | | | TS-h1290FX | | |
|---|---|---|--|--|--|---|--|
| |  | | | |  | | |
| Model | TS-h1090FU-7302P-256G (By Request) | TS-h1090FU-7302P-128G | TS-h1090FU-7232P-64G | | TS-h1290FX-7302P-256G (By Request) | TS-h1290FX-7302P-128G | TS-h1290FX-7232P-64G |
| Operating System | QTS / QuTS hero | | | | QTS / QuTS hero | | |
| CPU | AMD EPYC™ 7302P 16-core/32-thread processor, up to 3.3 GHz | | AMD EPYC™ 7232P/7252 8-core/16-thread processor, up to 3.2 GHz | | AMD EPYC™ 7302P 16-core/32-thread processor, up to 3.3 GHz | | AMD EPYC™ 7232P/7252 8-core/16-thread processor, up to 3.2 GHz |
| System Memory | 256 GB RDIMM DDR4 ECC (8 x 32 GB) max 1 TB | 128 GB RDIMM DDR4 ECC (8 x 16 GB) max 1 TB | 64 GB RDIMM DDR4 ECC (8 x 8 GB) max 1 TB | | 256 GB RDIMM DDR4 ECC (8 x 32 GB) max 1 TB | 128 GB RDIMM DDR4 ECC (8 x 16 GB) max 1 TB | 64 GB RDIMM DDR4 ECC (8 x 8 GB) max 1 TB |
| Drive Bay | 10 x 2.5-inch U.2 PCIe NVMe / SATA 6Gbps | | | | 12 x 2.5-inch | | |
| M.2 Slot | - | | | | - | | |
| Gigabit Ethernet Port (RJ45) | - | | | | - | | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | | | | 2 (2.5G/1G/100M/10M) | | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | | | | Optional via a PCIe adapter | | |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | | | | Optional via a PCIe adapter | | |
| 25 Gigabit Ethernet Port | 2 x 25GbE SFP28 SmartNIC port | | | | 2 x 25GbE SFP28 SmartNIC port | | |
| PCIe Slot | 2 Slot 1: PCIe Gen4 x16 Slot 2: PCIe Gen4 x16 For low profile PCIe cards only. | | | | 4 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x16 Slot 3: PCIe Gen 4 x8 Slot 4: PCIe Gen 4 x16 | | |
| USB | 3 x USB 3.2 Gen 1 | | | | 3 x USB 3.2 Gen 1 | | |
| HDMI Output | - | | | | - | | |
| Dimensions (HxWxD mm) | 44 x 430 x 580 | | | | 150 x 368 x 362 | | |

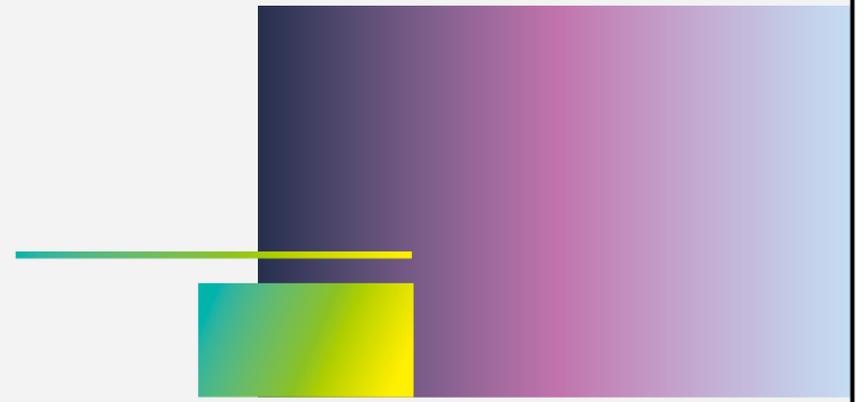10GbE connectivity:
The future is now!



| | TS-h1277AXU-RP | | TS-h1677AXU-RP | TS-i410X | TS-1232PXU-RP |
|---|--|--|--|---|---|
| |  | |  |  |  |
| Model | TS-h1277AXU-RP-7700-32G | TS-h1277AXU-RP-7600-16G | TS-h1677AXU-RP-7700-32G | TS-i410X-8G | TS-1232PXU-RP-4G |
| Operating System | QTS / QuTS hero | | QTS / QuTS hero | QTS | QTS |
| CPU | AMD Ryzen™ 7 7700 8-core/16-thread processor, burst up to 5.3 GHz AMD Radeon Graphics | AMD Ryzen™ 5 7600 6-core/12-thread processor, burst up to 5.1 GHz AMD Radeon Graphics | AMD Ryzen™ 7 7700 8-core/16-thread processor, burst up to 5.3 GHz AMD Radeon Graphics | Intel® Atom® x6425E 4-core/4-thread processor, burst up to 3.0 GHz | AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor |
| System Memory | 32 GB UDIMM DDR5 (1x 32 GB) max 128 GB | 16 GB UDIMM DDR5 (1x 16 GB) max 128 GB | 32 GB UDIMM DDR5 (1x 32 GB) max 128 GB | 8 GB on board (non-expandable) | 4 GB UDIMM DDR4 (1 x 4 GB) max 16 GB |
| Drive Bay | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s | | 16 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4 x 2.5-inch SATA 6Gb/s, 3Gb/s | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 slot | 2 x M.2 2280 PCIe Gen5 x2 slots | | 2 x M.2 2280 PCIe Gen5 x2 slots | - | Optional via a PCIe adapter |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | | 2 (2.5G/1G/100M/10M) | - | 2 (also support 10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | | - | - | - |
| 10 Gigabit Ethernet Port | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) | | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) | 2 x 10GBASE-T (10G/5G/2.5G/1G) | 2 x 10GbE SFP+ |
| 25 Gigabit Ethernet Port | - | | - | - | - |
| 100 Gigabit Ethernet Port | Optional via a PCIe adapter | | Optional via a PCIe adapter | - | - |
| PCIe Slot | 3 Slot 1: Gen 4 x 4 Slot 2: Gen 4 x 8 or Gen 4 x 4 Slot 3: Gen4 x 4 | | 3 Slot 1: Gen 4 x 4 Slot 2: Gen 4 x 8 or Gen 4 x 4 Slot 3: Gen4 x 4 | - | 1 Slot 1: PCIe Gen 2 x2 |
| USB port | 2 x Type-A USB 3.2 Gen 2 10Gbps | | 2 x Type-A USB 3.2 Gen 2 10Gbps | USB 3.2 Gen 2 | 4 x USB 3.2 Gen 1 |
| HDMI Output | - | | - | 1, HDMI™ 1.4b (up to 3840 x 2160 @ 30Hz) | - |
| Dimensions (HxWxD mm) | 88.6 x 432 x 511.2 | | 131.3 x 482.2 x 550.8 | 62 x 180 x 244 | 88.6 x 432 x 511 |

| | TS-832PXU-RP | TS-832PXU | TS-432PXU-RP | TS-432PXU |
|---|---|---|---|---|
| |  |  |  |  |
| Model | TS-832PXU-RP-4G | TS-832PXU-4G | TS-432PXU-RP-2G | TS-432PXU-2G |
| Operating System | QTS | QTS | QTS | QTS |
| CPU | AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor | AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor | AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor | AnnapurnaLabs Alpine AL324 64-bit ARM® Cortex-A57 quad-core 1.7GHz processor |
| System Memory | 4 GB UDIMM DDR4 (1 x 4 GB) max 16 GB | 4 GB UDIMM DDR4 (1 x 4 GB) max 16 GB | 2 GB UDIMM DDR4 (1 x 2 GB) max 16 GB | 2 GB UDIMM DDR4 (1 x 2 GB) max 16 GB |
| Drive Bay | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4 x 3.5" SATA 6Gb/s, 3Gb/s | 4 x 3.5" SATA 6Gb/s, 3Gb/s |
| M.2 slot | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter |
| Gigabit Ethernet Port (RJ45) | - | | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (also support 10M) | | 2 (also support 10M) | 2 (also support 10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | | - | - |
| 10 Gigabit Ethernet Port | 2 x 10GbE SFP+ | | 2 x 10GbE SFP+ | 2 x 10GbE SFP+ |
| 25 Gigabit Ethernet Port | - | | - | - |
| PCIe Slot | 1 Slot 1: PCIe Gen 2 x2 | | 1 Slot 1: PCIe Gen 2 x2 | 1 Slot 1: PCIe Gen 2 x2 |
| USB port | 4 x USB 3.2 Gen 1 | | 4 x USB 3.2 Gen 1 | 4 x USB 3.2 Gen 1 |
| HDMI Output | - | | - | - |
| Dimensions (HxWxD mm) | 88.6 x 432 x 511 | | 43.3 x 430 x 479 | 43.3 x 430 x 479 |


| | TS-877XU-RP | TS-h1886XU-RP R2 | | TVS-h1288X | TVS-h1688X | TS-855X |
|---|---|--|--|---|---|---|
| |  |  | |  |  |  |
| Model | TS-877XU-RP-3600-8G | TS-h1886XU-RP-R2-D1622-32G | | TVS-h1288X-W1250-16G | TVS-h1688X-W1250-32G | TS-855X-8G |
| Operating System | QTS | QTS / QuTS hero | | QTS / QuTS hero | QTS / QuTS hero | QTS / QuTS hero |
| CPU | AMD Ryzen™ 5 3600 6-core/12-thread processor, burst up to 4.2 GHz | Intel® Xeon® D-1622 4-core processor, burst up to 3.2 GHz | | Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz | Intel® Xeon® W-1250 6-core/12-thread processor, up to 4.7 GHz | Intel® Atom® C5125 8-core processor, 2.8GHz |
| System Memory | 8 GB UDIMM DDR4 (2 x 4GB) max 128 GB | 32 GB UDIMM DDR4 ECC (2 x 16GB) | | 16 GB ECC UDIMM DDR4 (2 x 8 GB) max 128 GB | 32GB ECC UDIMM DDR4 (2 x 16 GB) max 128 GB | 8 GB non-ECC UDIMM DDR4 (1 x 8 GB) max 128 GB |
| Drive Bay | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | Front: 12 x 3.5-inch SATA 6Gb/s, 3Gb/s Rear: 6 x 2.5-inch SATA 6Gb/s, 3Gb/s | | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s | 6 x 3.5-inch + 2 x 2.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 slot | - | - | | 2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots | 2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots | 2 x M.2 2280 PCIe Gen 3 x4 slots |
| Gigabit Ethernet Port (RJ45) | 2 | - | | - | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | Optional via a PCIe adapter | 4 (2.5G/1G/100M) | | 4 (also support 10M) | 4 (also support 10M) | 2 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter | - |
| 10 Gigabit Ethernet Port | 2 x 10GbE SFP+ SmartNIC port | 2 x 10GbE SFP+ SmartNIC port Pre-installed with a 10GbE PCIe adapter | | 2 x 10GBASE-T (10G/1G) | 2 x 10GBASE-T (10G/1G) | 1 x 10GBASE-T |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter | Optional via PCIe expansion card |
| Thunderbolt Port | - | - | | Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter | Optional via the QXP-T32P 2-port Thunderbolt 3 PCIe adapter | - |
| PCIe Slot | 4 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x8 or PCIe Gen 3 x4 Slot 3: PCIe Gen 3 x4 Slot 4: PCIe Gen 3 x8 or PCIe Gen 3 x4 | 3 Slot 1: PCIe Gen 2 x4 (x8 Slot) Slot 2: PCIe Gen 3 x4 Slot 3: PCIe Gen 3 x8 or x4 (x8 Slot) | | 3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 | 3 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x4 Slot 3: PCIe Gen3 x4 | 2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4 |
| USB Port | 4 x USB 3.2 Gen 1 1 x Type-C USB 3.2 Gen 2 10Gbps 1 x Type-A USB 3.2 Gen 2 10Gbps | 2 x USB 3.2 Gen 1 | | 2 x Type-C 3 x USB 3.2 Gen 1 3 x Type-A 3 x USB 3.2 Gen 1 | 2 x Type-C 3 x USB 3.2 Gen 1 4 x Type-A 3 x USB 3.2 Gen 1 | 1 x USB 2.0 3 x USB 3.2 Gen 1 |
| HDMI Output | Optional via a PCIe adapter | - | | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | - |
| Dimensions (HxWxD mm) | 88.3 x 482 x 562 | 88.6 x 432 x 511.2 | | 234.6 x 369.9 x 319.8 | 303.84 x 369.89 x 319.8 | 231.9 x 292.9 x 319.8 |

| | TS-431KX | TS-431X3 | | TS-932PX | TS-832PX |
|---|---|---|--|---|---|
| |  |  | |  |  |
| Model | TS-431KX-2G | TS-431X3-4G | | TS-932PX-4G | TS-832PX-4G |
| Operating System | QTS | QTS | | QTS | QTS |
| CPU | AnnapurnaLabs, an Amazon company Alpine AL214, 4-core, 1.7GHz | AnnapurnaLabs, an Amazon company Alpine AL314, 4-core, 1.7GHz | | AnnapurnaLabs Alpine AL324 ARM® Cortex-A57 quad-core 1.7GHz processor | AnnapurnaLabs Alpine AL324 ARM® Cortex-A57 quad-core 1.7GHz processor |
| System Memory | 2 GB SODIMM DDR3 (1 x 2 GB) max 8 GB | 4 GB SODIMM DDR3 (1 x 4 GB) max 8 GB | | 4 GB SODIMM DDR4 (1 x 4 GB) max 16 GB | 4 GB SODIMM DDR4(1 x 4 GB) max 16 GB |
| Drive Bay | 4x 3.5-inch SATA 6Gb/s, 3Gb/s | 4x 3.5-inch SATA 6Gb/s, 3Gb/s | | 5x 3.5-inch+ 4 x 2.5-inch SATA 6Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 slot | - | - | | - | Optional via a PCIe adapter |
| Gigabit Ethernet Port (RJ45) | 2 | 1 | | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | - | 1 | | 2 (also support 10M) | 2 (also support 10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | - | | - | - |
| 10 Gigabit Ethernet Port | 1 x 10GbE SFP+ | 1 x 10GbE SFP+ | | 2 x 10GbE SFP+ | 2 x 10GbE SFP+ |
| 25 Gigabit Ethernet Port | - | - | | - | - |
| PCIe Slot | - | - | | - | 1 Slot 1: PCIe Gen 2 x2 |
| USB port | 3 x USB 3.2 Gen 1 | 3 x USB 3.2 Gen 1 | | 3 x USB 3.2 Gen 1 | 3 x USB 3.2 Gen 1 |
| HDMI Output | - | - | | - | - |
| Dimensions (HxWxD mm) | 165 x 160.2 x 220.5 | 165 x 160.2 x 220.5 | | 176.5 x 224.6 x 224.1 | 180.2 x 329.3 x 280.8 |

| | TS-h987XU-RP | | TS-h1887XU-RP | | TS-h2287XU-RP | | TS-h3087XU-RP |
|---|---|--|--|---|---|---|---|
| |  | |  | |  | |  |
| Model | TS-h987XU-RP-E2334-16G | | TS-h1887XU-RP-E2334-16G | TS-h1887XU-RP-E2336-32G | TS-h2287XU-RP-E2336-32G | TS-h2287XU-RP-E2378-64G | TS-h3087XU-RP-E2378-64G |
| Operating System | QTS / QuTS hero | | QTS / QuTS hero | | QTS / QuTS hero | | QTS / QuTS hero |
| CPU | Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz | | Intel® Xeon® E-2334 4C 8T 3.4GHz, up to 4.8GHz | Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz | Intel® Xeon® E-2336 6C 12T 2.9GHz, up to 4.8GHz | Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz | Intel® Xeon® E-2378 8C 16T 2.6GHz, up to 4.8GHz |
| System Memory | 16 GB ECC DDR4 (1 x 16 GB) max 128 GB | | 16 GB ECC DDR4 (1 x 16 GB) max 128 GB | 32 GB ECC DDR4 (2 x 16 GB) max 128 GB | 32 GB ECC DDR4 (2 x 16 GB) max 128 GB | 64 GB ECC DDR4 (4 x 16 GB) max 128 GB | 64 GB ECC DDR4 (4 x 16 GB) max 128 GB |
| Memory Slot | 4 x Long-DIMM DDR4 | | 4 x Long-DIMM DDR4 | | 4 x Long-DIMM DDR4 | | 4 x Long-DIMM DDR4 |
| Drive Bay | 9 (4 x 3.5-inch SATA + 5 x 2.5-inch U.2 PCIe / SATA) 2.5-inch bays: | | 18 (12 x 3.5-inch SATA + 6 x 2.5-inch SATA) | | 22 (16 x 3.5-inch SATA + 6 x 2.5-inch SATA) | | 30 (24 x 3.5-inch SATA + 6 x 2.5-inch SATA) |
| M.2 Slot | Optional via a QM2 PCIe adapter | | Optional via a QM2 PCIe adapter | Optional via a QM2 PCIe adapter | Optional via a QM2 PCIe adapter | | Optional via a QM2 PCIe adapter |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M) | | 2 (2.5G/1G/100M) | | 2 (2.5G/1G/100M) | | 2 (2.5G/1G/100M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) | | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) | | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) | | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter |
| 100 Gigabit Ethernet Port | - | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter |
| PCIe Slot | 1 x Gen4 x8 | | 3 (2 x Gen4 x4 + 1 x Gen 4 x8) | | 3 (2 x Gen4 x4 + 1 x Gen 4 x8) | | 3 (2 x Gen4 x4 + 1 x Gen 4 x8) |
| USB | 4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps | | 4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps | | 4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps | | 4 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps |
| HDMI Output | - | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter |
| Dimensions (HxWxD mm) | 43.3 x 430 x 479 | | 88.6 x 432 x 511.2 | | 131.3 x 482.2 x 550.8 | | 176.2 x 441.6 x 630.2 |

| | TS-431XeU | | TS-435XeU | TS-h973AX | |
|---|---|--------------------------------------|---|---|--|
| |  | |  |  | |
| Model | TS-431XeU-2G | TS-431XeU-8G | TS-435XeU-4G | TS-h973AX-32G | TS-h973AX-8G |
| Operating System | QTS | | QTS | QTS / QuTS hero | |
| CPU | AnnapurnaLabs Alpine AL314 32-bit ARM® Cortex-A15 quad-core 1.7GHz processor | | Marvell OCTEON TX2™ CN9130 / CN9131 ARMv8 Cortex-A72 4-core 2.2GHz processor | AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor | |
| System Memory | 2 GB SODIMM DDR3 (1 x 2 GB) max 8 GB | 8 GB SODIMM DDR3 (1 x 8 GB) max 8 GB | 4 GB SODIMM DDR4 (1 x 4GB) max 32 GB | 32 GB SO-DIMM DDR4 (2 x 16 GB) max 64 GB | 8 GB SO-DIMM DDR4 (1 x 8 GB) max 64 GB |
| Drive Bay | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | 5 x 3.5-inch SATA + 4 x 2.5-inch SATA | |
| M.2 slot | - | | 2 x M.2 2280 PCIe Gen 3 x1 slots | - | |
| Gigabit Ethernet Port (RJ45) | 2 | | - | - | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | - | | 2 (2.5G/1G/100M) | 2 | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | | - | Optional via the QNA-UC5G1T USB to 5GbE network adapter | |
| 10 Gigabit Ethernet Port | 1 x 10GbE SFP+ | | 2 x 10GbE SFP+ | 1 x 10GBASE-T (10G/5G/2.5G/1G/100M) | |
| 25 Gigabit Ethernet Port | - | | - | - | |
| Thunderbolt Port | - | | - | - | |
| PCIe Slot | - | | 2 | 1 x Type-C USB 3.2 Gen 2 3 x Type-A USB 3.2 Gen 2 | |
| USB | 4 x USB 3.2 Gen 1 | | 2 x USB 2.0 2 x USB 3.2 Gen1 | - | |
| HDMI Output | - | | - | - | |
| Dimensions (HxWxD mm) | 43.3 x 430 x 291 | | 43.3 x 430 x 292.12 | 176.5 x 224.6 x 224.1 | |

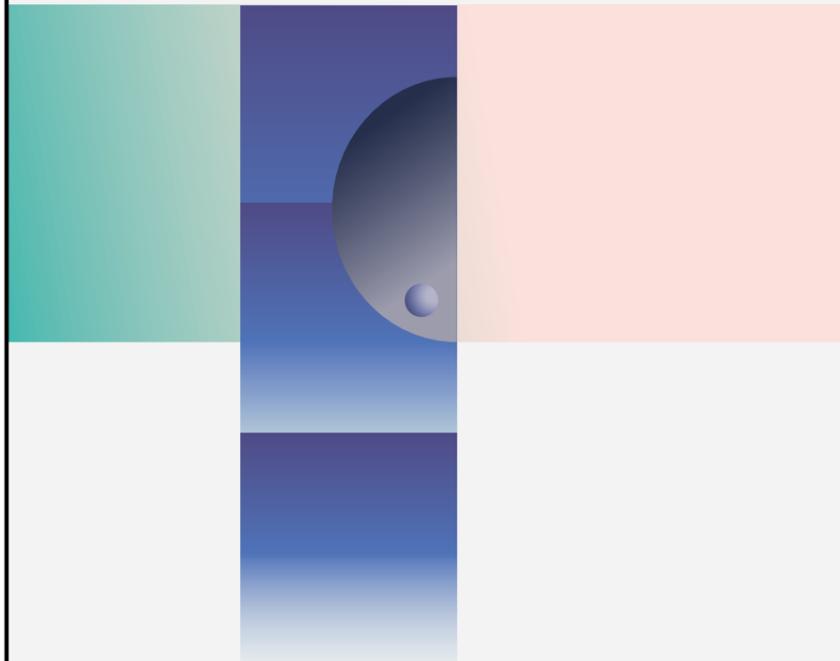2.5GbE is not just for offices, but also for homes



| | TS-1273AU-RP | TS-1673AU-RP |
|---|---|---|
| |  |  |
| Model | TS-1273AU-RP-8G | TS-1673AU-RP-16G |
| Operating System | QTS / QuTS hero | QTS / QuTS hero |
| CPU | AMD Ryzen™ Embedded V1500B 4-core/ 8-thread 2.2 GHz processor | AMD Ryzen™ Embedded V1500B 4-core/ 8-thread 2.2 GHz processor |
| System Memory | 8 GB UDIMM DDR4 (1 x 8 GB) max 64 GB | 16 GB UDIMM DDR4 (1 x 16 GB) |
| Drive Bay | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s | 16 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 slot | Optional via a QNAP QM2 PCIe card | Optional via a QNAP QM2 PCIe card |
| Gigabit Ethernet Port (RJ45) | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | - | - |
| PCIe Slot | 2 x PCIe Gen3 x4 | 2 x PCIe Gen3 x4 |
| USB Port | 1 x USB 3.2 Gen 1 Type-A 2 x USB 3.2 Gen 2 Type-C 1 x USB 3.2 Gen 2 Type-A | 1 x USB 3.2 Gen 1 Type-A 2 x USB 3.2 Gen 2 Type-C 1 x USB 3.2 Gen 2 Type-A |
| HDMI Output | Optional via a PCIe graphics card | Optional via a PCIe graphics card |
| Dimensions (HxWxD mm) | 88.6 x 432 x 370.7 | 131.3 x 432 x 370.9 |

| | TS-873AeU | TS-873AeU-RP |
|---|---|---|
| |  |  |
| Model | TS-873AeU-4G | TS-873AeU-RP-4G |
| Operating System | QTS / QuTS hero | QTS / QuTS hero |
| CPU | AMD Ryzen™ Embedded V1500B 4-core/ 8-thread 2.2 GHz processor | AMD Ryzen™ Embedded V1500B 4-core/ 8-thread 2.2 GHz processor |
| System Memory | 4 GB SODIMM DDR4 (1 x 4 GB) max 64 GB | 4 GB SODIMM DDR4 (1 x 4 GB) max 64 GB |
| Drive Bay | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 slot | 2 x M2 2280 (PCIe Gen3 x 1) | 2 x M2 2280 (PCIe Gen3 x 1) |
| Gigabit Ethernet Port (RJ45) | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter |
| PCIe Slot | 1 x PCIe Gen3 x8 | 1 x PCIe Gen3 x8 |
| USB Port | 2 x USB 3.2 Gen 2 Type-C 2 x USB 3.2 Gen 2 Type-A | 2 x USB 3.2 Gen 2 Type-C 2 x USB 3.2 Gen 2 Type-A |
| HDMI Output | Optional via a PCIe graphics card | Optional via a PCIe graphics card |
| Dimensions (HxWxD mm) | 88.6 x 432 x 297.4 | 88.6 x 432 x 297.4 |

| | TS-464U | | TS-464U-RP | | TS-864eU | | TS-864eU-RP | |
|---|---|------------|--|--|---|-------------|---|----------------|
| |  | |  | |  | |  | |
| Model | TS-464U-8G | TS-464U-4G | TS-464U-RP-8G | | TS-864eU-4G | TS-864eU-8G | TS-864eU-RP-4G | TS-864eU-RP-8G |
| Operating System | QTS | | QTS | | QTS | | QTS | |
| CPU | Intel® Celeron® N5095 4-core/ 4-thread processor, burst up to 2.9 GHz | | Intel® Celeron® N5095 4-core/ 4-thread processor, burst up to 2.9 GHz | | Intel® Celeron® N5095 4-core/ 4-thread processor, burst up to 2.9 GHz | | Intel® Celeron® N5095 4-core/ 4-thread processor, burst up to 2.9 GHz | |
| System Memory | 8 GB RAM | 4 GB RAM | 8 GB RAM | | 4 GB RAM | 8 GB RAM | 4 GB RAM | 8 GB RAM |
| Drive Bay | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | |
| M.2 Slot | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | |
| Gigabit Ethernet Port (RJ45) | - | | - | | - | | - | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | | 2 (2.5G/1G/100M/10M) | | 2 (2.5G/1G/100M/10M) | | 2 (2.5G/1G/100M/10M) | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter | |
| PCIe Slot | 1 Slot 1: PCIe Gen 3 x2 | | 1 Slot 1: PCIe Gen 3 x2 | | 1 Slot 1: PCIe Gen 3 x2 | | 1 Slot 1: PCIe Gen 3 x2 | |
| USB port | 2 x USB 2.0 2 x Type A USB3.2 Gen2 | | 2 x USB 2.0 2 x Type A USB3.2 Gen2 | | 2 x USB 2.0 2 x Type A USB3.2 Gen2 | | 2 x USB 2.0 2 x Type A USB3.2 Gen2 | |
| HDMI Output | 1, HDMI 1.4b | | 1, HDMI 1.4b | | 1, HDMI 1.4b | | 1, HDMI 1.4b | |
| Dimensions (HxWxD mm) | 43.3 x 482.6 x 483.9 | | 43.3 x 430 x 479 | | 88.6 x 482.14 x 318.13 | | 88.6 x 482.14 x 318.13 | |

| | TS-464eU | | | TS-1264U-RP | |
|---|--|-------------|--|---|----------------|
| |  | | |  | |
| Model | TS-464eU-4G | TS-464eU-8G | | TS-1264U-RP-4G | TS-1264U-RP-8G |
| Operating System | QTS | | | QTS | |
| CPU | Intel® Celeron® N5095 4-core/ 4-thread processor, burst up to 2.9 GHz | | | Intel® Celeron® N5095 4-core/ 4-thread processor, burst up to 2.9 GHz | |
| System Memory | 4 GB RAM | 8 GB RAM | | 4 GB RAM | 8 GB RAM |
| Drive Bay | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | | | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s | |
| M.2 Slot | 2 x M.2 2280 PCIe Gen 3 x1 | | | Optional via a PCIe adapter | |
| Gigabit Ethernet Port (RJ45) | - | | | - | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | | | 2 (2.5G/1G/100M/10M) | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | | | Optional via a PCIe adapter | |
| 10 Gigabit Ethernet Port | - | | | Optional via a PCIe adapter | |
| 25 Gigabit Ethernet Port | - | | | Optional via a PCIe adapter | |
| PCIe Slot | - | | | 1 Slot 1: PCIe Gen 3 x2 | |
| USB port | 2 x USB 2.0 2 x Type A USB3.2 Gen2 | | | 2 x USB 2.0 2 x Type A USB3.2 Gen2 | |
| HDMI Output | 1, HDMI 1.4b | | | 1, HDMI 1.4b | |
| Dimensions (HxWxD mm) | 43.3 x 482.6 x 321.33 | | | 88.7 x 482.2 x 423.8 | |

| | TS-855eU | TS-855eU-RP | | TS-216G | TS-410E | TVS-675 |
|---|---|---|--|---|---|---|
| |  |  | |  |  |  |
| Model | TS-855eU-8G | TS-855eU-RP-8G | | TS-216G | TS-410E-8G | TVS-675-8G |
| Operating System | QTS | QTS | | QTS | QTS | QTS / QuTS hero |
| CPU | Intel® Atom® C5125 8-core processor, up to 2.8GHz | Intel® Atom® C5125 8-core processor, up to 2.8GHz | | ARM 4-core Cortex-A55 2.0GHz processor | Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz | ZhaoXin KX-U6580 8-core 2.5GHz processor |
| System Memory | 8 GB SODIMM DDR4 (1 x 8 GB) max 64 GB | 8 GB SODIMM DDR4 (1 x 8 GB) max 64 GB | | 4 GB on board (non-expandable) | 8 GB on board (non-expandable) | 8 GB SODIMM DDR4 (1 x 8 GB) max 64 GB |
| Drive Bay | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | | 2 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4 x 2.5-inch SATA 6Gb/s, 3Gb/s | 6 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | 2 x M.2 2280 (PCIe Gen3 x 4) | 2 x M.2 2280 (PCIe Gen3 x 4) | | - | - | 2 x M.2 2280 PCIe Gen 3 x1 or SATA 6Gb/s slots |
| Gigabit Ethernet Port (RJ45) | - | - | | 1 | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) | | 1 (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter | | - | - | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter | | - | - | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter | | - | - | - |
| PCIe Slot | 2 x PCIe Gen3 (x4) Slot 1: PCIe Gen 3 (x4) Slot 2: PCIe Gen 3 (x4) | 2 x PCIe Gen3 (x4) Slot 1: PCIe Gen 3 (x4) Slot 2: PCIe Gen 3 (x4) | | - | - | 2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4 |
| USB port | 4 x USB 3.2 Gen 1 | 4 x USB 3.2 Gen 1 | | 2 x USB 2.0 port 1 x USB 3.2 Gen 1 port | 4 x USB 3.2 Gen 2 | 2 x USB 3.2 Gen 1 2 x USB 3.2 Gen 2 Type-A |
| HDMI Output | Optional via a PCIe graphics card | Optional via a PCIe graphics card | | - | 1, HDMI 1.4b (up to 3840 x 2160 @ 30Hz) | 1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz) |
| Dimensions (HxWxD mm) | 89 x 482 x 297.4 | 89 x 482 x 297.4 | | 165 x 102 x 220.6 | 180 x 59.1 x 244 | 188.2 x 263.9 x 280.8 |

| | TS-1655 | TS-AI642 | | TS-h686 | TS-h886 |
|---|---|---|--|---|---|
| |  |  | |  |  |
| Model | TS-1655-8G | TS-AI642-8G | | TS-h686-D1602-8G | TS-h886-D1602-8G |
| Operating System | QTS | QTS | | QTS / QuTS hero | QuTS hero / QTS |
| CPU | Intel® Atom® C5125 8-core processor, 2.8 GHz | 8-core ARM Cortex 64-bit Processor (4-core Cortex-A76 2.2 GHz + 4-core Cortex-A55 1.8 GHz) | | Intel® Xeon® D-1602 2-core/ 4-thread processor, up to 3.2 GHz | Intel® Xeon® D-1602 2-core/ 4-thread processor, up to 3.2 GHz |
| System Memory | 8 GB UDIMM DDR4 (1 x 8 GB) max 128 GB | 8 GB on board (non-expandable) | | 8 GB UDIMM DDR4 ECC (2 x 4 GB) max 128 GB | 8 GB UDIMM DDR4 ECC (2 x 4 GB) max 128 GB |
| Drive Bay | 12 x 3.5-inch + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s | 6 x 3.5-inch SATA 6Gb/s | | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s + 2 x 2.5-inch SATA 6Gb/s, 3Gb/s | 6 x 3.5-inch SATA 6Gb/s, 3Gb/s + 2 x 2.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | 2 x M.2 2280 PCIe Gen3 x2 slots | Optional via a PCIe adapter | | 2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots | 2 x M.2 22110/2280 NVMe PCIe Gen3 x4 slots |
| Gigabit Ethernet Port (RJ45) | - | 2 | | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 1 (2.5G/1G/100M/10M) | | 4 (also support 10M) | 4 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | - | | Optional via a PCIe adapter | Optional via a PCIe adapter |
| PCIe Slot | 3 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4 Slot 3: PCIe Gen 3 x4 | 1 Slot 1: PCIe Gen 3 x2 | | 2 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x8 | 2 Slot 1: PCIe Gen3 x8 Slot 2: PCIe Gen3 x8 |
| USB port | 4 x USB 3.2 Gen 1 | 2 x USB 2.0 2 x USB Gen3 x 1 | | 3 x USB 3.2 Gen 1 | 3 x USB 3.2 Gen 1 |
| HDMI Output | - | 1, HDMI 1.4b | | - | - |
| Dimensions (HxWxD mm) | 303.84 x 369.89 x 319.8 | 165 x 235 x 226.5 | | 225 x 224.9 x 319.8 | 225 x 292.9 x 319.8 |


| | TVS-h474 | TVS-h674 | | TVS-h874 | | |
|---|---|--|--|---|--|---|
| |  |  | |  | | |
| Model | TVS-h474-PT-8G | TVS-h674-i5-32G | TVS-h674-i3-16G | TVS-h874X-i9-64G | TVS-h874-i7-32G | TVS-h874-i5-32G |
| Operating System | QTS / QuTS hero | QTS / QuTS hero | | QuTS hero / QTS | QuTS hero / QTS | QuTS hero / QTS |
| CPU | Intel® Pentium™ Gold G7400 2-core/ 4-thread 3.7 GHz Processor | Intel® Core™ i5-12400 6-core/ 12-thread Processor, burst up to 4.4 GHz | Intel® Core™ i3-12100 4-core/ 8-thread Processor, burst up to 4.3 GHz | Intel® Core™ i9 16-core (8P+8E) / 24-thread Processor | Intel® Core™ i7 12-core (8P+4E) / 20-thread Processor | Intel® Core™ i5-12400 6-core/ 12-thread Processor, burst up to 4.4 GHz |
| System Memory | 8 GB SODIMM DDR4 (1 x 8 GB) max 64 GB | 32 GB SODIMM DDR4 (2 x 16 GB) max 64 GB | 16 GB SODIMM DDR4 (1 x 16 GB) max 64 GB | 64 GB SODIMM DDR4 (2 x 32 GB) max 64 GB | 32 GB SODIMM DDR4 (2 x 16 GB) max 64 GB | 32 GB SODIMM DDR4 (2 x 16 GB) max 64 GB |
| Drive Bay | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | 6 x 3.5-inch SATA 6Gb/s, 3Gb/s | | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | 2 x M.2 2280 PCIe Gen3 x2 slots | 2 x M.2 2280 PCIe Gen4 x4 slots | | 2 x M.2 2280 PCIe Gen4 x4 slots | 2 x M.2 2280 PCIe Gen4 x4 slots | 2 x M.2 2280 PCIe Gen4 x4 slots |
| Gigabit Ethernet Port (RJ45) | - | - | | - | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) | | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter | | 2 x 10GBASE-T | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter | Optional via a PCIe adapter |
| PCIe Slot | 2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 3 x2 (PCH) | 2 Slot 1: PCIe Gen 4 x16 (CPU) Slot 2: PCIe Gen 4 x4 (PCH) | | 2 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x4 | 2 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x4 | 2 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x4 |
| USB port | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps | | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps |
| HDMI Output | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) |
| Dimensions (HxWxD mm) | 188.2 x 199.3 x 279.6 | 188.2 x 264.3 x 279.6 | | 188.2 x 329.3 x 280.8 | 188.2 x 329.3 x 280.8 | 188.2 x 329.3 x 280.8 |

| | TS-253E | TS-453E | TS-364 | HS-264 |
|---|---|---|---|---|
| |  |  |  |  |
| Model | TS-253E-8G | TS-453E-8G | TS-364-8G | HS-264-8G |
| Operating System | QTS | QTS | QTS | QTS |
| CPU | Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz | Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz | Intel® Celeron® N5095 4-core/ 4-thread processor, burst up to 2.9 GHz | Intel Celeron N5105 4 core 2.0GHz, burst up to 2.9GHz |
| System Memory | 8 GB RAM | 8 GB RAM | 8 GB RAM | 8 GB DDR4, not expandable |
| Drive Bay | 2 x 3.5-inch SATA 6Gb/s | 4 x 3.5-inch SATA 6Gb/s | 3 x 3.5-inch SATA 6Gb/s, 3Gb/s | 2 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 slot | 2 x M.2 2280 PCIe Gen 3 x2 | 2 x M.2 2280 PCIe Gen 3 x2 | 2 x M.2 2280 PCIe Gen 3 x2 slots | - |
| Gigabit Ethernet Port (RJ45) | - | - | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) | 1 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | - | - | - |
| 10 Gigabit Ethernet Port | - | - | - | - |
| 25 Gigabit Ethernet Port | - | - | - | - |
| PCIe Slot | - | - | - | - |
| USB port | 2 x USB 2.0 2 x USB 3.2 Gen 2 Type A | 2 x USB 2.0 2 x USB 3.2 Gen 2 Type A | 1 x USB 3.2 Gen 1 2 x USB 3.2 Gen 2 Type A | 2 x USB 3.2 Gen 2 Type A |
| HDMI Output | 2 x HDMI 1.4b (up to 3840 x 2160 @ 30Hz) | 2 x HDMI 1.4b (up to 3840 x 2160 @ 30Hz) | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 2 x HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz) |
| Dimensions (HxWxD mm) | 168.5 x 102 x 225 | 177 x 180 x 235 | 142 x 150 x 260 | 41.3 x 302 x 220 |

| | TBS-464 | TS-264 | | TS-464 | | TS-664 |
|---|---|---|--|---|--|---|
| |  |  | |  | |  |
| Model | TBS-464-8G | TS-264-8G | | TS-464-8G TS-464-4G | | TS-664-8G TS-664-4G |
| Operating System | QTS | QTS | | QTS | | QTS |
| CPU | Intel® Celeron® N5105 4-core/4-thread processor, burst up to 2.9GHz | Intel® Celeron® N5095 4-core/4-thread processor, burst up to 2.9 GHz | | Intel® Celeron® N5095 4-core/4-thread processor, burst up to 2.9 GHz | | Intel® Celeron® N5095 4-core/4-thread processor, burst up to 2.9 GHz |
| System Memory | 8 GB DDR4, not expandable | 8 GB RAM | | 8 GB RAM 4 GB RAM | | 8 GB RAM 4 GB RAM |
| Drive Bay | - | 2 x 3.5-inch SATA 6Gb/s | | 4 x 3.5-inch SATA 6Gb/s | | 6 x 3.5-inch SATA 6Gb/s |
| M.2 slot | 4 x M.2 2280 NVMe Gen3 x2 slots | 2 x M.2 2280 PCIe Gen 3 x1 | | 2 x M.2 2280 PCIe Gen 3 x1 | | 2 x M.2 2280 PCIe Gen 3 x1 |
| Gigabit Ethernet Port (RJ45) | - | - | | - | | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) | | 2 (2.5G/1G/100M/10M) | | 2 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | - | Optional via a PCIe adapter | | Optional via a PCIe adapter | | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | - | - | | - | | - |
| PCIe Slot | - | 1 Slot 1: PCIe Gen 3 x2 | | 1 Slot 1: PCIe Gen 3 x2 | | 1 Slot 1: PCIe Gen 3 x2 |
| USB port | 3 x USB 2.0 2 x USB 3.2 Gen 1 | 2 x USB 2.0 2 x USB 3.2 Gen 2 Type-A | | 2 x USB 2.0 2 x USB 3.2 Gen 2 Type-A | | 2 x USB 2.0 2 x USB 3.2 Gen 2 Type-A |
| HDMI Output | 2, HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz) | 1, HDMI 2.1 | | 1, HDMI 2.1 | | 1, HDMI 2.1 |
| Dimensions (HxWxD mm) | 30 x 230 x 165 | 168 x 105 x 226 | | 168 x 170 x 226 | | 168 x 235 x 226 |

| | TS-262 | TS-462 | | TS-873A | TS-673A | TS-473A |
|---|---|--|--|---|---|---|
| |  |  | |  |  |  |
| Model | TS-262-4G | TS-462-2G TS-462-4G | | TS-873A-8G | TS-673A-8G | TS-473A-8G |
| Operating System | QTS | QTS | | QTS / QuTS hero | QTS / QuTS hero | QTS / QuTS hero |
| CPU | Intel® Celeron® N4505 2-core/2-thread processor, burst up to 2.9 GHz | Intel® Celeron® N4505 2-core/2-thread processor, burst up to 2.9 GHz | | AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor | AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor | AMD Ryzen™ Embedded V1500B 4-core/8-thread 2.2 GHz processor |
| System Memory | 4 GB RAM | 2 GB RAM 4 GB RAM | | 8 GB SO-DIMM DDR4 (1 x 8 GB) max 64 GB | 8 GB SO-DIMM DDR4 (1 x 8 GB) max 64 GB | 8 GB SO-DIMM DDR4 (1 x 8 GB) max 64 GB |
| Drive Bay | 2 x 3.5-inch SATA 6Gb/s | 4 x 3.5-inch SATA 6Gb/s | | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 6 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | 2 x M.2 2280 PCIe Gen 3 x1 | 2 x M.2 2280 PCIe Gen 3 x1 | | 2 x M.2 2280 PCIe Gen3 x1 slots | 2 x M.2 2280 PCIe Gen3 x1 slots | 2 x M.2 2280 PCIe Gen3 x1 slots |
| Gigabit Ethernet Port (RJ45) | - | - | | - | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 1 (2.5G/1G/100M/10M) | 1 (2.5G/1G/100M/10M) | | 2 | 2 | 2 |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter | | Optional via a PCIe adapter | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | - | - | | - | - | - |
| PCIe Slot | 1 Slot 1: PCIe Gen 3 x2 | 1 Slot 1: PCIe Gen 3 x2 | | 2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4 | 2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4 | 2 Slot 1: PCIe Gen 3 x4 Slot 2: PCIe Gen 3 x4 |
| USB port | 2 x USB 2.0 2 x Type-A USB 3.2 Gen 2 (10Gbps) | 2 x USB 2.0 2 x Type-A USB 3.2 Gen 2 (10Gbps) | | 3 x Type-A USB 3.2 Gen 2 10Gbps 1 x Type-C USB 3.2 Gen 1 5Gbps | 3 x Type-A USB 3.2 Gen 2 10Gbps 1 x Type-C USB 3.2 Gen 1 5Gbps | 3 x Type-A USB 3.2 Gen 2 5V/1A 10Gbps 1 x Type-C USB 3.2 Gen 1 5V/1A 5Gbps |
| HDMI Output | 1, HDMI 2.1 | 1, HDMI 2.1 | | Optional via a PCIe adapter | Optional via a PCIe adapter | Optional via a PCIe adapter |
| Dimensions (HxWxD mm) | 168 x 105 x 226 | 168 x 170 x 226 | | 180.2 x 329.3 x 279.6 | 180.2 x 264.3 x 279.6 | 180.2 x 199.3 x 279.6 |

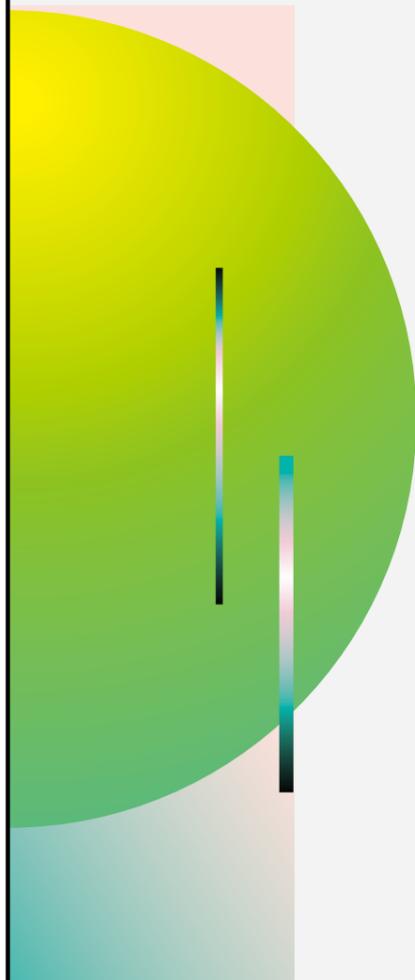Breakthrough performance and outstanding connectivity with Thunderbolt NAS



| | TVS-472XT | TVS-672XT |
|---|---|---|
| |  |  |
| Model | TVS-472XT-i3-4G | TVS-672XT-i3-8G |
| Operating System | QTS / QuTS hero | QTS / QuTS hero |
| CPU | Intel® Core™ i3 Processor | Intel® Core™ i3 Processor |
| System Memory | 4 GB SODIMM DDR4 (1 x 4 GB) max 64 GB | 8 GB SODIMM DDR4 (2 x 4 GB) max 64 GB |
| Drive Bay | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | 6 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | 2 x M.2 2280 PCIe Gen3 x2 slots | 2 x M.2 2280 PCIe Gen3 x2 slots |
| Gigabit Ethernet Port (RJ45) | 2 | 2 |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | 1 x 10GBASE-T (10G/5G/2.5G/1G/100M) | 1 x 10GBASE-T (10G/5G/2.5G/1G/100M) |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter |
| Thunderbolt Port | 2 (Thunderbolt™ 3) | 2 (Thunderbolt™ 3) |
| PCIe Slot | 2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) | 2 Slot 1: PCIe Gen 3 x16 (CPU) Slot 2: PCIe Gen 3 x4 (PCH) |
| USB port | 1 x USB 3.2 Gen 1 2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps | 1 x USB 3.2 Gen 1 2 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps |
| HDMI Output | 1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz) | 1, HDMI 2.0 (up to 3840 x 2160 @ 60Hz) |
| Dimensions (HxWxD mm) | 188.2 x 199.3 x 279.6 | 188.2 x 264.3 x 279.6 |


| | TVS-h674T | TVS-h874T |
|---|---|--|
| |  |  |
| Model | TVS-h674T-i5-32G | TVS-h874T-i9-64G TVS-h874T-i7-32G |
| Operating System | QTS / QuTS hero | QTS / QuTS hero |
| CPU | Intel® Core™ i5-12400 6-core/ 12-thread Processor, burst up to 4.4 GHz | Intel® Core™ i9 16-core (8P+8E) / 24-thread Processor Intel® Core™ i7 12-core (8P+4E) / 20-thread Processor |
| System Memory | 32 GB SODIMM DDR4 (2 x 16 GB) max 64 GB | 64 GB SODIMM DDR4 (2 x 32 GB) max 64 GB 32 GB SODIMM DDR4 (2 x 16 GB) max 64 GB |
| Drive Bay | 6 x 3.5-inch SATA 6Gb/s, 3Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | 2 x M.2 2280 PCIe Gen 4 x4 slots | 2 x M.2 2280 PCIe Gen 4 x4 slots |
| Gigabit Ethernet Port (RJ45) | - | - |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 2 (2.5G/1G/100M/10M) | 2 (2.5G/1G/100M/10M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 10 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter |
| 25 Gigabit Ethernet Port | Optional via a PCIe adapter | Optional via a PCIe adapter |
| Thunderbolt Port | 2 (Thunderbolt™ 4) | 2 (Thunderbolt™ 4) |
| PCIe Slot | 2 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x4 | 2 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x4 |
| USB port | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps |
| HDMI Output | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) |
| Dimensions (HxWxD mm) | 188.2 x 264.3 x 280.8 | 188.2 x 329.3 x 280.8 |

TBS-h574TX



| Model | TBS-h574TX-i5-16G | TBS-h574TX-i3-12G |
|---|--|--|
| Operating System | QTS / QuTS hero | QTS / QuTS hero |
| CPU | Intel® Core™ i5-1340PE 12C(4P+8E)/16T up to 4.50GHz | Intel® Core™ i3-1320PE 8C(4P+4E)/12T up to 4.50GHz |
| System Memory | 16 GB on board (non-expandable) | 12 GB on board (non-expandable) |
| Drive Bay | 5 x E1.S up to 15mm (5x PCIe Gen3 x2) Pre-install QDA support M.2 2280 for each slots | |
| M.2 Slot | - | |
| Gigabit Ethernet Port (RJ45) | - | |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | 1 | |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | |
| 10 Gigabit Ethernet Port | 1 x 10GBASE-T (10G/5G/2.5G/1G/100M) | |
| 25 Gigabit Ethernet Port | - | |
| Thunderbolt Port | 2 (Thunderbolt™ 4) | |
| PCIe Slot | - | |
| USB port | 1 x USB 2.0 2 x USB 3.2 Gen 2 | |
| HDMI Output | 1, HDMI 1.4b | |
| Dimensions (HxWxD mm) | 215 x 199 x 60 | |

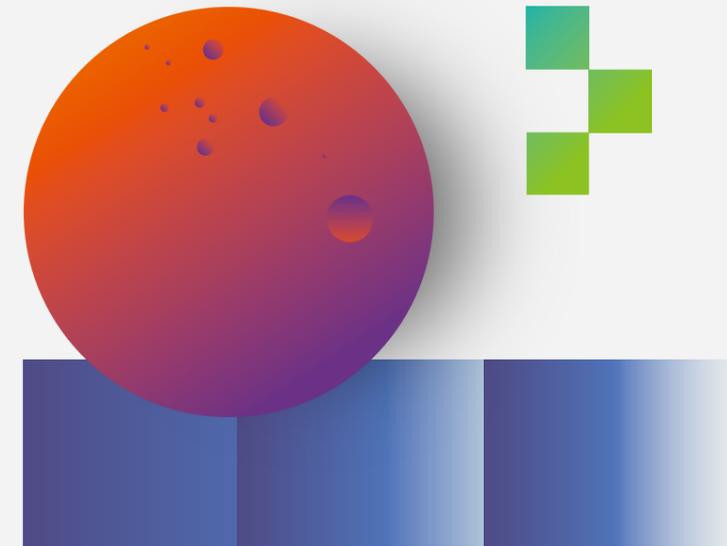
Easily build your personal cloud and access anywhere



| | TS-133 | TS-233 | TS-433 |
|---|---|---|---|
| |  |  |  |
| Model | TS-133 | TS-233 | TS-433-4G |
| Operating System | QTS | QTS | QTS |
| CPU | ARM 4-core Cortex-A55 1.8GHz processor | ARM 4-core Cortex-A55 2.0GHz processor | ARM 4-core Cortex-A55 2.0GHz processor |
| System Memory | 2 GB on board (non-expandable) | 2 GB on board (non-expandable) | 4 GB on board (non-expandable) |
| Drive Bay | 1 x 3.5-inch SATA 6Gb/s, 3Gb/s | 2 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | - | - | - |
| Gigabit Ethernet Port (RJ45) | 1 | 1 | 1 |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | - | - | 1 (2.5G/1G/100M) |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | - | - |
| 10 Gigabit Ethernet Port | - | - | - |
| 25 Gigabit Ethernet Port | - | - | - |
| PCIe Slot | - | - | - |
| USB port | 1 x USB 2.0 1 x USB 3.2 Gen 1 | 2 x USB 2.0 1 x USB 3.2 Gen 1 | 2 x USB 2.0 1 x USB 3.2 Gen 1 |
| HDMI Output | - | - | - |
| Dimensions (HxWxD mm) | 186 × 66.1 × 157.6 | 186 × 91.7 × 157.6 | 165 × 160.2 × 220.5 |

| | TS-431K | HS-453DX |
|---|---|--|
| |  |  |
| Model | TS-431K | HS-453DX-8G |
| Operating System | QTS | QTS |
| CPU | AnnapurnaLabs, an Amazon company Alpine AL214, 4-core, 1.7GHz | Intel® Celeron® J4115 4-core/4-thread processor, burst up to 2.5 GHz |
| System Memory | 1GB DDR3 | 8 GB SO-DIMM DDR4 (2 x 4 GB) |
| Drive Bay | 4x 3.5-inch SATA 6Gb/s, 3Gb/s | 2 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| M.2 Slot | - | 2 x M.2 2280 SATA 6Gb/s slots |
| Gigabit Ethernet Port (RJ45) | 2 | 1 |
| 2.5 Gigabit Ethernet Port (2.5G/1G/100M) | - | - |
| 5 Gigabit Ethernet Port (5G/2.5G/1G/100M) | - | - |
| 10 Gigabit Ethernet Port | - | 1 x 10GBASE-T (10G/5G/2.5G/1G/100M) |
| 25 Gigabit Ethernet Port | - | - |
| PCIe Slot | - | - |
| USB port | 2 x USB 3.2 Gen 1 | 2 x USB 2.0 1 x USB 3.2 Gen 1 USB-C 2 x USB 3.2 Gen 1 USB-A |
| HDMI Output | - | 2, HDMI 2.0 (up to resolution 3840 x 2160 @ 60Hz) + HDMI 1.4b (up to 3840 x 2160 @ 30Hz) |
| Dimensions (HxWxD mm) | 165 × 160.2 × 220.5 | 43.8 x 404 x 220 |

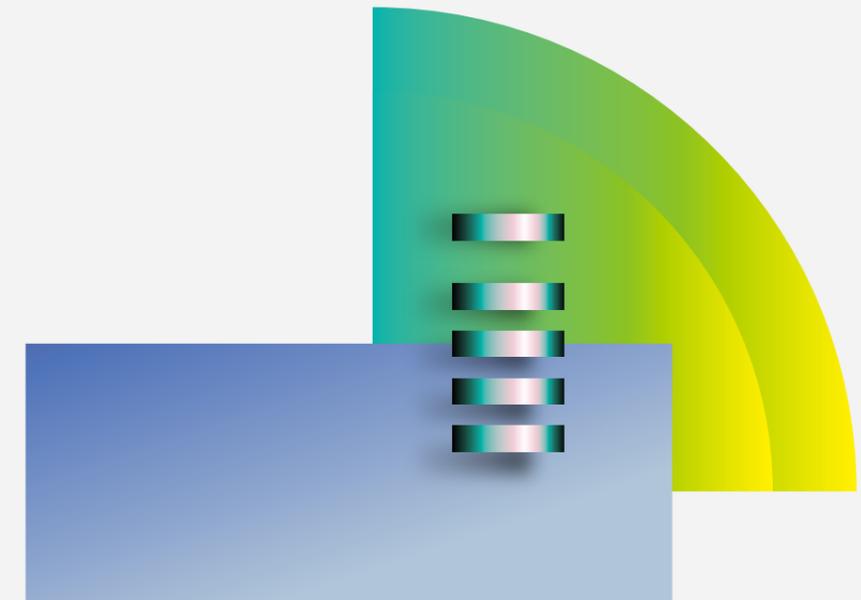Flexible and economical storage expansion



| | TL-R1200C-RP | TL-R400S |
|------------------------------------|--|--|
| |  |  |
| Model | TL-R1200C-RP | TL-R400S |
| Supported O.S. | QNAP QTS / QuTS hero, Windows, Ubuntu | QNAP QTS / QuTS hero, Windows, Ubuntu |
| Drive Bay | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| Gigabit Ethernet Port (RJ45) | - | - |
| Host Interface | 1 x USB 3.2 Gen 2 Type-C | 1 x SFF-8088 |
| Dimensions (HxWxD mm) | 88.6 x 482 x 562.5 | 43.9 x 438.9 x 291.1 |
| Max. number of HDDs/SSDs supported | 12 | 4 |
| Hard Drive Type | 3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives | 3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives |

| | TL-D800C | TL-D400S |
|------------------------------------|--|--|
| |  |  |
| Model | TL-D800C | TL-D400S |
| Supported O.S. | QNAP QTS / QuTS hero, Windows, Ubuntu | QNAP QTS / QuTS hero, Windows, Ubuntu |
| Drive Bay | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| Gigabit Ethernet Port (RJ45) | - | - |
| Host Interface | 1 x USB 3.2 Gen 2 Type-C | 1 x SFF-8088 |
| Dimensions (HxWxD mm) | 188.2 x 329.3 x 281.4 | 168.5 x 160.2 x 219 |
| Max. number of HDDs/SSDs supported | 8 | 4 |
| Hard Drive Type | 3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives | 3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives |

| | TL-D800S | TL-D1600S |
|------------------------------------|--|---|
| |  |  |
| Model | TL-D800S | TL-D1600S |
| Supported O.S. | QNAP QTS / QuTS hero, Windows, Ubuntu | QNAP QTS / QuTS hero, Windows, Ubuntu |
| Drive Bay | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s + 4 x 2.5-inch SATA 6Gb/s, 3Gb/s |
| Gigabit Ethernet Port (RJ45) | - | - |
| Host Interface | 2 x SFF-8088 | 4 x SFF-8088 |
| Dimensions (HxWxD mm) | 188.2 x 329.3 x 279.6 | 303.84 x 369.89 x 319.8 |
| Max. number of HDDs/SSDs supported | 8 | 16 |
| Hard Drive Type | 3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives | 3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives (for 3.5-inch tray slots only) 2.5-inch SATA solid state drives |

| | TR-002 | TR-004 | TR-004U |
|------------------------------------|---|---|---|
| |  |  |  |
| Model | TR-002 | TR-004 | TR-004U |
| Supported O.S. | QNAP QTS / QuTS hero, Windows, Mac, Linux | QNAP QTS / QuTS hero, Windows, Mac, Linux | QNAP QTS / QuTS hero, Windows, Mac, Linux |
| CPU | Micro processor with hardware RAID | Micro processor with hardware RAID | Micro processor with hardware RAID |
| Drive Bay | 2 x 3.5-inch SATA 6Gb/s, 3Gb/s | 4 x 3.5-inch SATA 3Gb/s | 4 x 3.5-inch SATA 3Gb/s |
| Gigabit Ethernet Port (RJ45) | - | - | - |
| USB port | 1 x Type-C USB 3.2 Gen 2 10Gbps | 1 x Type-C USB 3.0 (USB 3.2 Gen 1) | 1 x Type-C USB 3.0 (USB 3.2 Gen 1) |
| Host Interface | - | - | - |
| Dimensions (HxWxD mm) | 168.5 x 102 x 219 | 168.5 x 160.2 x 219 | 44 x 439 x 291 |
| Max. number of HDDs/SSDs supported | 2 | 4 | 4 |
| Hard Drive Type | 2 x 2.5-inch or 3.5-inch SATA 6Gb/s | 4 x 2.5-inch or 3.5-inch SATA 3Gb/s | 4 x 2.5-inch or 3.5-inch SATA 3Gb/s |

| | TL-R1200S-RP | TL-R1220Sep-RP |
|------------------------------------|--|---|
| |  |  |
| Model | TL-R1200S-RP | TL-R1220Sep-RP |
| Supported O.S. | QNAP QTS / QuTS hero, Windows, Ubuntu | QNAP QTS / QuTS hero, Windows |
| Drive Bay | 12 x 3.5-inch SATA 6Gb/s, 3Gb/s | 12 x 3.5-inch SAS 12Gb/s, SAS/SATA 6Gb/s |
| Gigabit Ethernet Port (RJ45) | - | - |
| Host Interface | 3 x SFF-8088 | 4 x 12Gb/s SAS 3.0 wide ports (4-wide port) Mini-SAS HD (SFF-8644) |
| Dimensions (HxWxD mm) | 88.6 x 482 x 562.5 | 88.65 x 482.2 x 423.8 |
| Max. number of HDDs/SSDs supported | 12 | 12 |
| Hard Drive Type | 3.5-inch SATA hard disk drives 2.5-inch SATA hard disk drives 2.5-inch SATA solid state drives | 3.5" or 2.5" SAS 12Gb/s, SAS/SATA 6Gb/s and 3Gb/s drives |

| | TL-R1620Sep-RP | TL-R1620Sdc |
|------------------------------------|---|---|
| |  |  |
| Model | TL-R1620Sep-RP | TL-R1620Sdc |
| Supported O.S. | QNAP QTS / QuTS hero, Windows | QNAP QES, Windows |
| CPU | - | - |
| Drive Bay | 16 x 3.5-inch SAS 12Gb/s, SAS/SATA 6Gb/s | 16 x 3.5-inch SAS 12Gb/s, SAS/SATA 6Gb/s |
| Gigabit Ethernet Port (RJ45) | - | 1 For console access and CLI. |
| USB port | - | - |
| Host Interface | 4 x 12Gb/s SAS 3.0 wide ports (4-wide port) Mini-SAS HD (SFF-8644) | 3 x 12Gb/s SAS 3.0 wide ports (4-wide port) Mini-SAS HD (SFF-8644) for each controller |
| Dimensions (HxWxD mm) | 131.3 x 482.2 x 425.3 | 131.3 x 482.2 x 425.3 |
| Max. number of HDDs/SSDs supported | 16 | 16 |
| Hard Drive Type | 3.5" or 2.5" SAS 12Gb/s, SAS/SATA 6Gb/s and 3Gb/s drives | 3.5" or 2.5" SAS 12Gb/s 6Gb/s drives |

| | TL-R1200PES-RP | TL-R1600PES-RP |
|------------------------------------|---|--|
| |  |  |
| Model | TL-R1200PES-RP | TL-R1600PES-RP |
| Supported O.S. | QNAP QTS / QuTS hero | QNAP QTS / QuTS hero |
| Drive Bay | 12 x 3.5-inch SATA 6Gb/s | 16 x 3.5-inch SATA 6Gb/s |
| Host Interface | PCIe Gen3 x8, 1 x IN (dual SFF-8644), 1 x OUT (dual SFF-8644) | PCIe Gen3 x8, 1 x IN (dual SFF-8644), 1 x OUT (dual SFF-8644) |
| Dimensions (HxWxD mm) | 88.65x482.2x423.8 | 131.3x482.2x423.3 |
| Max. number of HDDs/SSDs supported | 12 | 16 |
| Hard Drive Type | 3.5" or 2.5" SATA 6Gb/s and 3Gb/s drives | 3.5" or 2.5" SATA 6Gb/s and 3Gb/s drives |

| | TL-R2400PES-RP |
|------------------------------------|---|
| |  |
| Model | TL-R2400PES-RP |
| Supported O.S. | QNAP QTS / QuTS hero |
| Drive Bay | 24 x 3.5-inch SATA 6Gb/s |
| Host Interface | PCIe Gen3 x8, 1 x IN (dual SFF-8644), 1 x OUT (dual SFF-8644) |
| Dimensions (HxWxD mm) | 176.15 x 480.74 x 672.05 |
| Max. number of HDDs/SSDs supported | 24 |
| Hard Drive Type | 3.5" or 2.5" SATA 6Gb/s and 3Gb/s drives |



Bolster IT infrastructure with high-speed networking solutions



| | QSW-M7308R-4X | QSW-M5216-1T |
|------------------------|---|--|
| |  |  |
| Model | QSW-M7308R-4X | QSW-M5216-1T |
| Management Type | Web Managed | Web Managed |
| Number of Ports | 12 | 17 |
| Gigabit Ethernet Port | 4 x 100GbE QSFP28 8 x 25GbE SFP28 | 16 x 25GbE SFP28 1 x 10GbE BASE-T (RJ45) |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Half-width rackmount | Rackmount |
| Dimensions (HxWxD mm) | 43.3 x 207 x 248.8 | 43.5 x 285 x 237.7 |

| | QSW-3216R-8S8T | QSW-M3212R-8S4T |
|------------------------|---|--|
| |  |  |
| Model | QSW-3216R-8S8T | QSW-M3212R-8S4T |
| Management Type | Unmanaged | Web Managed |
| Number of Ports | 16 | 12 |
| Gigabit Ethernet Port | 8 x 10GbE BASE-T (RJ45) 8 x 10GbE SFP | 4 x 10GbE BASE-T (RJ45) 8 x 10GbE SFP |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Half-width rackmount | Half-width rackmount |
| Dimensions (HxWxD mm) | 43.3 x 207 x 199.5 | 43.3 x 207 x 199.5 |

| | QSW-M2116P-2T2S | QSW-1105-5T |
|------------------------|---|--|
| |  |  |
| Model | QSW-M2116P-2T2S | QSW-1105-5T |
| Management Type | Web Managed | Unmanaged |
| Number of Ports | 20 | 5 |
| Gigabit Ethernet Port | 2 x 10GbE SFP+ 2 x 10GbE BASE-T (RJ45) 16 x 2.5GbE (RJ45) | 5 x 2.5GbE (RJ45) |
| Total PoE Ports | 18 | - |
| PoE Power Output | Port 1-16 (30W), Port 19-20 (90W) | - |
| Total PoE Power Budget | 280W | - |
| Form Factor | Rackmount | Desktop |
| Dimensions (HxWxD mm) | 43.5 x 285 x 234.8 | 34 x 180 x 145 |

| | QSW-M2108-2C | QSW-M2108-2S |
|------------------------|---|---|
| |  |  |
| Model | QSW-M2108-2C | QSW-M2108-2S |
| Management Type | Web Managed | Web Managed |
| Number of Ports | 10 | 10 |
| Gigabit Ethernet Port | 2 x 10GbE SFP+/RJ45 Combo Ports 8 x 2.5GbE (RJ45) | 2 x 10GbE SFP+ 8 x 2.5GbE (RJ45) |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Desktop | Desktop |
| Dimensions (HxWxD mm) | 42.5 x 290 x 127 | 42.5 x 290 x 127 |

| | QSW-M2108R-2C | QSW-308S |
|------------------------|---|---|
| |  |  |
| Model | QSW-M2108R-2C | QSW-308S |
| Management Type | Web Managed | Unmanaged |
| Number of Ports | 10 | 11 |
| Gigabit Ethernet Port | 2 x 10GbE SFP+/RJ45 Combo Ports 8 x 2.5GbE (RJ45) | 3 x 10GbE SFP+ 8 x 1GbE (RJ45) |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Half-width rackmount | Desktop |
| Dimensions (HxWxD mm) | 43.3 x 207 x 199.5 | 42.5 x 290 x 127 |

| | QSW-308-1C | QSW-IM1200-8C |
|-----------------------|---|---|
| |  |  |
| Model | QSW-308-1C | QSW-IM1200-8C |
| Management Type | Unmanaged | Web Managed |
| Number of Ports | 11 | 12 |
| Gigabit Ethernet Port | 2 x 10GbE SFP+ 1 x 10GbE SFP+/RJ45 Combo Ports 8 x 1GbE (RJ45) | 4 x 10GbE SFP+ 8 x 10GbE SFP+/RJ45 Combo Ports |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Operating Temperature | - | -30°C-65°C (-22°F -149°F) |
| Form Factor | Desktop | Rackmount |
| Dimensions (HxWxD mm) | 42.5 x 290 x 127 | 43.5 x 285 x 238 |

| | QSW-M2106-4C | QSW-M2106-4S |
|------------------------|---|--|
| |  |  |
| Model | QSW-M2106-4C | QSW-M2106-4S |
| Management Type | Web Managed | Web Managed |
| Number of Ports | 10 | 10 |
| Gigabit Ethernet Port | 4 x 10GbE SFP+/RJ45 Combo Ports 6 x 2.5GbE (RJ45) | 4 x 10GbE SFP+ 6 x 2.5GbE (RJ45) |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Desktop | Desktop |
| Dimensions (HxWxD mm) | 42.5 x 290 x 127 | 42.5 x 290 x 127 |

| | QSW-M3216R-8S8T | QSW-M1204-4C |
|------------------------|---|--|
| |  |  |
| Model | QSW-M3216R-8S8T | QSW-M1204-4C |
| Management Type | Web Managed | Web Managed |
| Number of Ports | 16 | 12 |
| Gigabit Ethernet Port | 8 x 10GbE BASE-T (RJ45) 8 x 10GbE SFP+/RJ45 Combo Ports | 8 x 10GbE SFP+ 4 x 10GbE SFP+/RJ45 Combo Ports |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Half-width rackmount | Rackmount |
| Dimensions (HxWxD mm) | 207 x 199.5 x 43.3 | 46.65 x 285 x 236.6 |


| | QSW-2104-2S | QSW-M408-4C |
|------------------------|---|--|
| |  |  |
| Model | QSW-2104-2S | QSW-M408-4C |
| Management Type | Unmanaged | Web Managed |
| Number of Ports | 6 | 12 |
| Gigabit Ethernet Port | 2 x 10GbE SFP+ 4 x 2.5GbE (RJ45) | 4 x 10GbE SFP+/RJ45 Combo Ports 8 x 1GbE (RJ45) |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Desktop | Desktop |
| Dimensions (HxWxD mm) | 34 x 180 x 145 | 42.5 x 290 x 127 |

| | QSW-M2106R-2S2T | QSW-M2106PR-2S2T |
|------------------------|---|---|
| |  |  |
| Model | QSW-M2106R-2S2T | QSW-M2106PR-2S2T |
| Management Type | Web Managed | Web Managed |
| Number of Ports | 10 | 10 |
| Gigabit Ethernet Port | 2 x 10GbE SFP+ 2 x 10GbE BASE-T (RJ45) 6 x 2.5GbE (RJ45) | 2 x 10GbE SFP+ 2 x 10GbE BASE-T (RJ45) 6 x 2.5GbE (RJ45) |
| Total PoE Ports | - | 8 |
| PoE Power Output | - | Port 1-8 (90W) |
| Total PoE Power Budget | - | 310W |
| Form Factor | Half-width rackmount | Half-width rackmount |
| Dimensions (HxWxD mm) | 43.3 x 207 x 248.8 | 43.3 x 207 x 248.8 |

| | QSW-M804-4C | QSW-2104-2T |
|------------------------|---|---|
| |  |  |
| Model | QSW-M804-4C | QSW-2104-2T |
| Management Type | Web Managed | Unmanaged |
| Number of Ports | 8 | 6 |
| Gigabit Ethernet Port | 4 x 10GbE SFP+ 4 x 10GbE SFP+/RJ45 Combo Ports | 2 x 10GbE BASE-T (RJ45) |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Rackmount | Desktop |
| Dimensions (HxWxD mm) | 46.65 x 285 x 236.6 | 34 x 180 x 145 |

| | QSW-M408-2C | QSW-M408-2S |
|------------------------|---|---|
| |  |  |
| Model | QSW-M408-2C | QSW-M408-2S |
| Management Type | Web Managed | Web Managed |
| Number of Ports | 12 | 12 |
| Gigabit Ethernet Port | 2 x 10GbE SFP+ 2 x 10GbE SFP + /RJ45 Combo Ports 8 x 1GbE (RJ45) | 4 x 10GbE SFP+ 8 x 1GbE (RJ45) |
| Total PoE Ports | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Form Factor | Desktop | Desktop |
| Dimensions (HxWxD mm) | 42.5 x 290 x 127 | 42.5 x 290 x 127 |

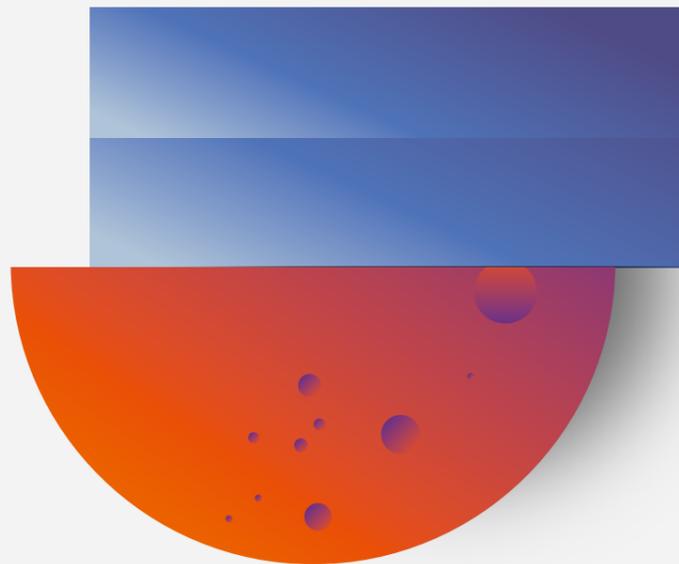
Secure remote multi-site VPN,
providing a high-speed
on-premises solution covering
wired and wireless connections



| | QHora-321 | QHora-322 | QHora-301W |
|-----------------------------|---|---|---|
| |  |  |  |
| Model | QHora-321 | QHora-322 | QHora-301W |
| Number of Ethernet Ports | 6 | 9 | 6 |
| 10GbE BASE-T (RJ45) | - | 3 x 10GBASE-T (10G/5G/2.5G/1G/100M) | 2 x 10GBASE-T (10G/5G/2.5G/1G/100M) |
| 2.5GbE (RJ45) | 6 | 6 | - |
| 1GbE (RJ45) | - | - | 4 |
| Wireless Antenna | - | - | 8 Internal Antennas |
| Wi-Fi 6 (802.11ax) | - | - | Yes |
| Wi-Fi 5 (802.11ac) | - | - | Yes |
| USB 3.2 Gen 1 port | - | 1 | 2 |
| Wireless Standard | - | - | 802.11a/b/g/n/ac/ax |
| Wireless Speed Rating | - | - | AX3600 |
| Wireless Bandwidth | - | - | 20/40/80/160 MHz |
| Transmit Output Power | - | - | Depends on country code |
| Dimensions (HxWxD mm) | 166.4 x 145.7 x 29.85 | 226 x 140 x 44.4 | 250x180x48 |
| QNAP SD-WAN solution, QuWAN | Yes | Yes | Yes |

| | QMiroPlus-201W | QMiro-201W |
|-----------------------------|---|---|
| |  |  |
| Model | QMiroPlus-201W | QMiro-201W |
| Number of Ethernet Ports | 5 | 2 |
| 10GbE BASE-T (RJ45) | - | - |
| 2.5GbE Host Port(RJ45) | 1 | - |
| 1GbE (RJ45) | 4 | 2 |
| Wireless Antenna | 4 Internal Antennas | 4 Internal Antennas |
| Wi-Fi 5 (802.11ac) | Yes | Yes |
| USB 3.2 Gen 1 port | 2 | 1 |
| Bluetooth | Version 5 | Version 5 |
| Wireless Standard | 802.11a/b/g/n/ac | 802.11a/b/g/n/ac |
| Wireless Speed Rating | AC2200 | AC2200 |
| Wireless Bandwidth | 20/40/80MHz | 20/40/80MHz |
| Dimensions | 183.5 x 105 x 143.5 | 68 x 100 x 175.5 |
| Wi-Fi Mesh | Yes (with Tri-Band) | Yes (with Tri-Band) |
| QNAP SD-WAN solution, QuWAN | Yes | Yes |
| Drive Bay | 2 x 2.5-inch SATA 3Gb/s(Compatible with 6Gb/s SSD/HDD) | - |

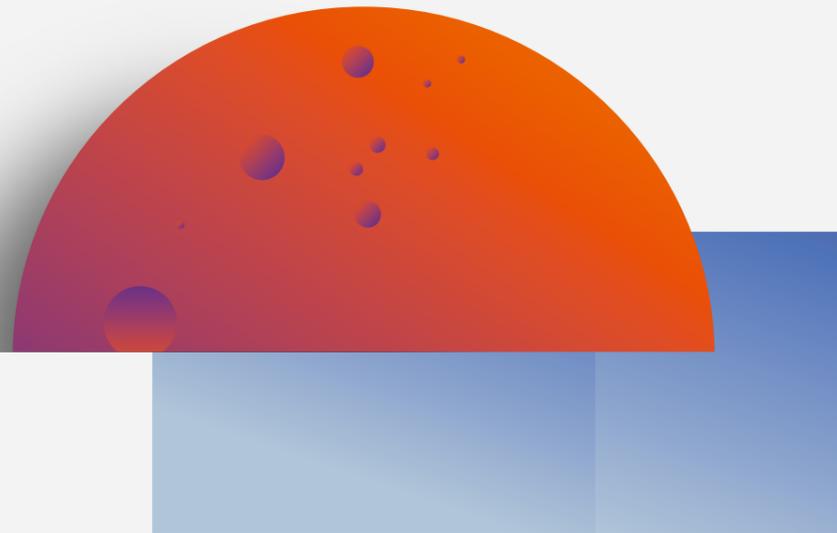Highly Efficient, Economic and Secure



| QGD-1602 | | |
|---------------------------|---|---|
| |  |  |
| Model | QGD-1602-C3558-8G | QGD-1602-C3758-16G |
| Management Type | Web Managed | Web Managed |
| PCIe Slot | Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed) | Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed) |
| USB port | 2 x USB 3.2 Gen 1 | 2 x USB 3.2 Gen 1 |
| Management Port | 2 x 5GbE ; 2 x 1GbE | 2 x 5GbE ; 2 x 1GbE |
| HDMI Output | - | - |
| Number of Ports | 18 | 18 |
| 10GbE SFP+ | 2 | 2 |
| 2.5GbE (RJ45) | 8 | 8 |
| 1GbE (RJ45) | 8 | 8 |
| 1GbE SFP/RJ45 Combo Ports | - | - |
| Total PoE Ports | - | - |
| PoE PSE (802.3af, 15.4W) | - | - |
| PoE+ PSE (802.3at, 30W) | - | - |
| PoE++ PSE (802.3bt, 60W) | - | - |
| PoE++ PSE (802.3bt, 90W) | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Dimensions (HxWxD mm) | 44.2 x 435.2 x 327.7 | 44.2 x 435.2 x 327.7 |

| QGD-1600 | | |
|---------------------------|---|--|
| |  | |
| Model | QGD-1600-4G | QGD-1600-8G |
| Management Type | Web Managed | Web Managed |
| PCIe Slot | Slot 1: PCIe Gen2 (x2) Slot 2: PCIe Gen2 (x2) | Slot 1: PCIe Gen2 (x2) Slot 2: PCIe Gen2 (x2) |
| USB port | 1 x USB 3.2 Gen 1 2 x USB 2.0 | 1 x USB 3.2 Gen 1 2 x USB 2.0 |
| Management Port | 1 x 1GbE | 1 x 1GbE |
| HDMI Output | 1 | 1 |
| Number of Ports | 16 | 16 |
| 10GbE SFP+ | - | - |
| 2.5GbE (RJ45) | - | - |
| 1GbE (RJ45) | 14 | 14 |
| 1GbE SFP/RJ45 Combo Ports | 2 | 2 |
| Total PoE Ports | - | - |
| PoE PSE (802.3af, 15.4W) | - | - |
| PoE+ PSE (802.3at, 30W) | - | - |
| PoE++ PSE (802.3bt, 60W) | - | - |
| PoE++ PSE (802.3bt, 90W) | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| Dimensions (HxWxD mm) | 47.2 x 436.2 x 326.2 | 47.2 x 436.2 x 326.2 |

| | QuCPE-3032 | QuCPE-3034 | QuCPE-7012 | QuCPE-7012 | | QuCPE-7030A | |
|--------------------------|---|--|---|---|---|---|--|
| |  |  |  |  | |  | |
| Model | QuCPE-3032-C3558R-8G | QuCPE-3034-C3758R-16G | QuCPE-7012-D2166NT-64G | QuCPE-7012-D2146NT-32G | QuCPE-7012-D2123IT-8G | QuCPE-7030A-D1736NT-32G | QuCPE-7030A-D1749NT-32G |
| System | QNE Network | QNE Network | QNE Network | QNE Network | | QNE Network | QNE Network |
| CPU | Intel® Atom® C3558R 4-core 2.4 GHz processor | Intel® Atom® C3758R 8-core 2.4 GHz processor | Intel® Xeon® D-2166NT 12-core/24-thread 2.0GHz processor (16.6M Cache; up to 3.0 GHz) | Intel® Xeon® D-2146NT 8-core/16-thread 2.3GHz processor (11M Cache; burst up to 3.0GHz) | Intel® Xeon® D-2123IT 4C/8T (11M Cache, 2.20 GHz, up to 3GHz) | Intel® Xeon® D-1736NT 8C/16T 2.70GHz (up to 3.50 GHz) | Intel® Xeon® D-1749NT 10C/20T 3.00GHz (up to 3.50 GHz) |
| System Memory | 8GB DDR4 2400MHz Non-ECC UDIMM (1 x 8 GB) | 16GB DDR4 2400MHz Non-ECC UDIMM (2 x 8 GB) | 64GB DDR4 2666MHz ECC RDIMM (4 x 16GB) | 32GB DDR4 2666MHz ECC RDIMM (2 x 16GB) | 8GB DDR4 2666MHz ECC RDIMM (1 x 8GB) | 32GB DDR4 2666MHz ECC RDIMM (2 x 16GB) | 32GB DDR4 2666MHz ECC RDIMM (2 x 16GB) |
| Drive Bays | - | - | 2 x 2.5-inch SATA 6Gb/s, 3Gb/s | 2 x 2.5-inch SATA 6Gb/s, 3Gb/s | | 2 x 2.5-inch SATA 6Gb/s, 3Gb/s | 2 x 2.5-inch SATA 6Gb/s, 3Gb/s |
| PCIe Slot | - | - | 1 x PCIe Gen 3 x8 | 1 x PCIe Gen 3 x8 | | 1 x PCIe Gen4 x 8 (FH) Or 2 x PCIe Gen4 x 4 (FH) | 1 x PCIe Gen4 x 8 (FH) Or 2 x PCIe Gen4 x 4 (FH) |
| Console Port (RJ45) | 1 | 1 | 1 | 1 | | 1 | 1 |
| M.2 SSD Slots | 2 x M.2 2280 NVMe | 2 x M.2 2280 NVMe | - | - | | 3 | 3 |
| USB 2.0 port | 1 Type-A | 1 Type-A | 1 | 1 | | - | - |
| USB 3.2 Gen 1 port | 1 Type-A | 1 Type-A | 1 | 1 | | 2 | 2 |
| Dimension W x D x H (mm) | 285 x 237 x 46 | 285 x 237 x 46 | 430 x 426 x 44.2 | 430 x 426 x 44.2 | | 436.2 x 454.3 x 44.2 | 436.2 x 454.3 x 44.2 |
| 10GbE SFP+ | 2 | 4 | 4 | 4 | | 5 | 5 |
| 2.5GbE (RJ45) | 8 | 8 | 8 | 8 | | 8 | 8 |

| | QGD-1602P | | QGD-1600P | | QGD-3014-16PT |
|---------------------------|---|--|---|--|---|
| |  | |  | |  |
| Model | QGD-1602P-C3758-16G | | QGD-1602P-C3558-8G | | QGD-3014-16PT-8G |
| Management Type | Web Managed | | Web Managed | | Web Managed |
| PCIe Slot | Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed) | | Slot 1: PCIe Gen3 (x4 slot, x2 speed) Slot 2: PCIe Gen3 (x4 slot, x2 speed) | | - |
| USB port | 2 x USB 3.2 Gen 1 | | 2 x USB 3.2 Gen 1 | | 3 x USB 3.2 Gen 1 |
| Management Port | 2 x 5GbE ; 2 x 1GbE | | 2 x 5GbE ; 2 x 1GbE | | 2 x 2.5GbE |
| HDMI Output | - | | - | | 2 |
| Number of Ports | 18 | | 18 | | 16 |
| 10GbE SFP+ | 2 | | 2 | | - |
| 2.5GbE (RJ45) | 8 | | 8 | | - |
| 1GbE (RJ45) | 8 | | 8 | | 14 |
| 1GbE SFP/RJ45 Combo Ports | - | | - | | 2 |
| Total PoE Ports | 16 | | 16 | | 16 |
| PoE PSE (802.3af, 15.4W) | Ports 1-16 | | Ports 1-16 | | Ports 1-16 |
| PoE+ PSE (802.3at, 30W) | Ports 1-16 | | Ports 1-16 | | Ports 1-16 |
| PoE++ PSE (802.3bt, 60W) | - | | - | | - |
| PoE++ PSE (802.3bt, 90W) | Ports 1-4 | | Ports 1-4 | | - |
| PoE Power Output | Ports 1-4 (90W), Ports 5-16 (30W) | | Ports 1-4 (90W), Ports 5-16 (30W) | | Ports 1-16 (Max 30W) |
| Total PoE Power Budget | 370W | | 200W | | 140W |
| Dimensions (HxWxD mm) | 44.2 x 435.2 x 327.7 | | 44.2 x 435.2 x 327.7 | | 130 x 295 x 224.8 |

Secure surveillance system & Smart Video Conferencing Solution








| KoiBox-100W | |
|---|--|
|  | |
| Model | koibox-100w |
| Operating System | KoiMeeter |
| CPU | Intel® Celeron® dual-core 1.8GHz |
| System Memory | 4GB DDR4 |
| Drive Bay | 1 x 2.5-inch SATA (HDD/SSD not included) |
| Gigabit Ethernet Port | 1 x 1GbE RJ45 |
| Wi-Fi / Bluetooth | Intel Wi-Fi 6 AX201, 802.11ax, Bluetooth 5.2 |
| HDMI Output | 1 x HDMI 1.4b output |
| USB Port | 4 x USB 3.2 Gen 2 Type-A |
| Dimensions (H x W x D) | 45 x 232 x 152 |




| | QVP-63B | QVP-85B |
|---|---|---|
|   | | |
| Model | QVP-63B | QVP-85B |
| Operating System | QVR Pro OS (QVP) | QVR Pro OS (QVP) |
| CPU | Intel® Core™ i3 Processor | Intel® Core™ i5 Processor |
| System Memory | 16 GB SODIMM DDR4 (1 x 16 GB) | 32 GB SODIMM DDR4 (2 x 16 GB) |
| Drive Bay | 6 x 3.5-inch SATA 6Gb/s, 3Gb/s | 8 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| Max Live Cameras (Local Display) | 50ch @ All 720p, H.264, 30FPS 30ch @ All 1080p, H.264, 30FPS | 56ch @ All 720p, H.264, 30FPS 34ch @ All 1080p, H.264, 30FPS |
| Max Playback Cameras (Local Display) | 16 | 16 |
| Max Concurrent Connection (Client) | 16 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras | 16 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras |
| Embedded Channel | 8 | 8 |
| Max Channel | 36 H264 / 1920x1080 / 30FPS | 64 H264 / 1920x1080 / 30FPS |
| Gigabit Ethernet Port | 2 x 2.5GbE | 2 x 2.5GbE |
| PoE PSE (802.3af, 15.4W) | - | - |
| PoE+ PSE (802.3at, 30W) | - | - |
| PoE Power Output | - | - |
| Total PoE Power Budget | - | - |
| PCI slot | 2 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x4 | 2 Slot 1: PCIe Gen 4 x16 Slot 2: PCIe Gen 4 x4 |
| USB port | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps | 1 x Type-C USB 3.2 Gen 2 10Gbps 2 x Type-A USB 3.2 Gen 2 10Gbps |
| HDMI Output | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 1, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) |
| Dimensions (HxWxD mm) | 188.2 x 264.3 x 280.8 | 188.2 x 329.3 x 280.8 |

| | QVP-41B | QVP-21C | QVP-41C |
|--------------------------------------|--|--|--|
| |  |  |  |
| Model | QVP-41B | QVP-21C | QVP-41C |
| Operating System | QVR Pro OS (QVP) | QVR Pro OS (QVP) | QVR Pro OS (QVP) |
| CPU | Intel Celeron® Processor | Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz | Intel® Celeron® J6412 4-core/ 4-thread processor, burst up to 2.6 GHz |
| System Memory | 8 GB SODIMM DDR4 (2 x 4 GB) | 8GB RAM | 8GB RAM |
| Drive Bay | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s | 2 x 3.5-inch SATA 6Gb/s | 4 x 3.5-inch SATA 6Gb/s, 3Gb/s |
| Max Live Cameras (Local Display) | 24ch @ All 720p,H.264, 30FPS 12ch @ All 1080p,H.264, 30FPS | 12ch @ All 720p,H.264, 30FPS 6ch @ All 1080p,H.264, 30FPS | 24ch @ All 720p,H.264, 30FPS 12ch @ All 1080p,H.264, 30FPS |
| Max Playback Cameras (Local Display) | 12 | 12 | 12 |
| Max Concurrent Connection (Client) | 8 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras | 8 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras | 8 (4 live cameras / per remote client) *The number of client concurrent connection varies by live cameras |
| Embedded Channel | 8 | 8 | 8 |
| Max Channel | 24 H264 / 1920x1080 / 30FPS | 16 H264 / 1920x1080 / 30FPS | 24 H264 / 1920x1080 / 30FPS |
| Gigabit Ethernet Port | 14 x 1GbE (RJ45) 2 x 2.5 GbE 2 x 1GbE SFP/RJ45 Combo Port | 2 x 2.5GbE | 2 x 2.5GbE |
| PoE PSE (802.3af, 15.4W) | port 1-16 | - | - |
| PoE+ PSE (802.3at, 30W) | port 1-16 | - | - |
| PoE Power Output | port 1-16 (Max 30W per port) | - | - |
| Total PoE Power Budget | 140W | - | - |
| PCI slot | - | - | - |
| USB port | 3 x USB 3.2 Gen 1 | 2 x USB 3.2 Gen 2 | 2 x USB 3.2 Gen 2 |
| HDMI Output | 2, HDMI 2.0 (up to 3840 x 2160 @ 60Hz) | 2, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) | 2, HDMI 1.4b (up to 4096 x 2160 @ 30Hz) |
| Dimensions (HxWxD mm) | 130 x 295 x 224.8 | 169.2 x 102 x 220.5 | 168.5 x 160.2 x 220.5 |

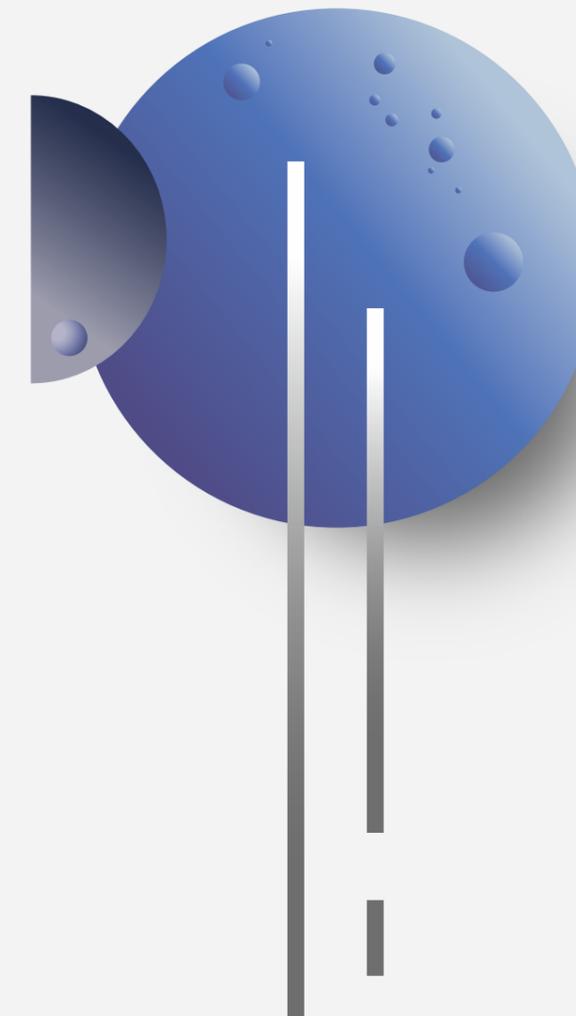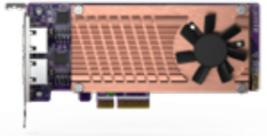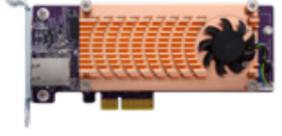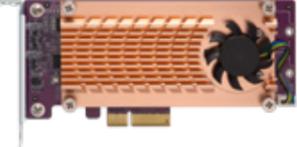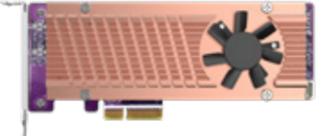Versatile feature-rich accessories to enhance the performance of your system







| | QM2-2P2G2T | QM2-2P10G1TB | QM2-2S-220A | QM2-2P-244A |
|-------------|---|---|---|---|
| |  |  |  |  |
| Model | QM2-2P2G2T | QM2-2P10G1TB | QM2-2S-220A | QM2-2P-244A |
| description | Dual M.2 2280 SATA SSD & dual-port 2.5GbE expansion card | Dual M.2 2280 PCIe NVMe SSD & single-port 10GbE expansion card | Dual M.2 22110/2280 SATA SSD expansion card | Dual M.2 22110/2280 PCIe NVMe SSD expansion card |

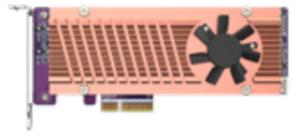
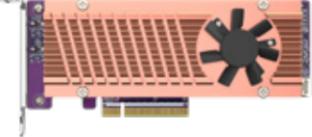
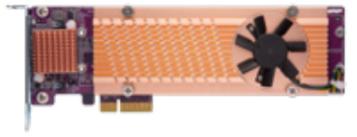
| | QM2-2P-344A | QM2-2P-384A | QM2-4S-240 | QDA-SA3 |
|-------------|---|---|---|---|
| |  |  |  |  |
| Model | QM2-2P-344A | QM2-2P-384A | QM2-4S-240 | QDA-SA3 |
| description | Dual M.2 22110/2280 PCIe NVMe SSD expansion card | Dual M.2 22110/2280 PCIe NVMe SSD expansion card | Dual M.2 22110/2280 SATA SSD expansion card | 2.5-inch 6Gbps SAS to SATA drive adapter |

| | QDA-UMP4 | QDA-U2MP | QDA-A2AR | QDA-A2MAR |
|-------------|--|--|---|--|
| |  |  |  |  |
| Model | QDA-UMP4 | QDA-U2MP | QDA-A2AR | QDA-A2MAR |
| description | Use an M.2 PCIe NVMe SSD in a U.2 PCIe NVMe SSD drive bay for PC and NAS | Use two M.2 PCIe NVMe SSD in a U.2 PCIe NVMe SSD drive bay for PC and NAS | Use two 2.5-inch SATA drives in a single 3.5-inch SATA drive bay with RAID support for PC and NAS | Use two M.2 SATA SSDs in a single 2.5-inch SATA drive bay with RAID support for PC and NAS |



| | QXP-1600eS-A1164 | QXP-10G2U3A | QXP-400eS-A1164 | QXP-800eS-A1164 |
|-------------|---|---|---|---|
| |  |  |  |  |
| Model | QXP-1600eS-A1164 | QXP-10G2U3A | QXP-400eS-A1164 | QXP-800eS-A1164 |
| description | 16-port SATA expansion card | USB 3.2 Gen 2 dual-port PCIe expansion card | Quad-port SATA expansion card (1 x SFF-8088) | 8-port SATA expansion card (2 x SFF-8088) |
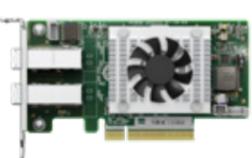
| | QXP-T32P | QXP-820S-B3408 | QXP-16G2FC | QXP-32G2FC |
|-------------|---|---|---|---|
| |  |  |  |  |
| Model | QXP-T32P | QXP-820S-B3408 | QXP-16G2FC | QXP-32G2FC |
| description | Dual-port Thunderbolt™ 3 Expansion Card | Dual-port External SAS 12Gb/s storage expansion card | Dual-port 16Gb Enhanced Gen 5 Fibre Channel expansion card with SFP+ transceivers | Dual-port 32Gb Gen 6 Fibre Channel expansion card with SFP+ transceivers |

| | QXP-3X8PES | QXP-3X4PES | | QXG-10G1T | QXG-10G2T |
|-------------|---|---|--|---|---|
| |  |  | |  |  |
| Model | QXP-3X8PES | QXP-3X4PES | | QXG-10G1T | QXG-10G2T |
| description | Dual-port PCIe Gen 3 x8 expansion card | Dual-port PCIe Gen 3 x4 expansion card | | Single-port, 5-speed 10 GbE RJ45 network expansion card | Dual-port, 5-speed 10 GbE RJ45 network expansion card |
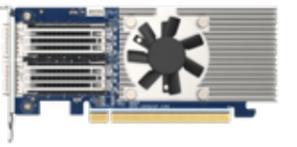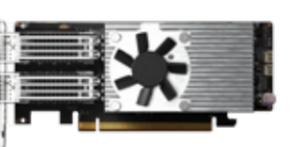
| | QXG-25G2SF-CX6 | QXG-100G2SF-CX6 | | QXG-100G2SF-E810 | QXG-2G1T-I225 |
|-------------|---|---|--|---|---|
| |  |  | |  |  |
| Model | QXG-25G2SF-CX6 | QXG-100G2SF-CX6 | | QXG-100G2SF-E810 | QXG-2G1T-I225 |
| description | Dual-port 25 GbE SFP28 network expansion card | Dual-port 100 GbE QSFP28 network expansion card | | Dual-port 100 GbE QSFP28 network expansion card | Single-port 2.5 GbE RJ45 network expansion card |

| | QXG-2G2T-I225 | QXG-2G4T-I225 | | QXG-5G1T-111C | QXG-5G2T-111C |
|-------------|--|--|--|--|--|
| |  |  | |  |  |
| Model | QXG-2G2T-I225 | QXG-2G4T-I225 | | QXG-5G1T-111C | QXG-5G2T-111C |
| description | Dual-port 2.5 GbE RJ45 network expansion card | Quad-port 2.5 GbE RJ45 network expansion card | | Single-port, 4-speed 5 GbE RJ45 network expansion card | Dual-port, 4-speed 5 GbE RJ45 network expansion card |
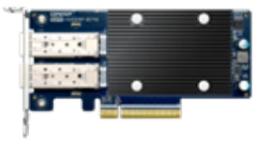
| | QXG-5G4T-111C | QXG-25G2SF-E810 | | QXG-10G2SF-X710 | QNA-T310G1S |
|-------------|---|---|--|---|---|
| |  |  | |  |  |
| Model | QXG-5G4T-111C | QXG-25G2SF-E810 | | QXG-10G2SF-X710 | QNA-T310G1S |
| description | Quad-port, 4-speed 5 GbE RJ45 network expansion card | Dual-port 25 GbE SFP28 network expansion card | | Dual-port 10 GbE SFP+ network expansion card | Single-port Thunderbolt 3 to single-port 10GbE SFP+ |

| | QNA-T310G1T |
|-------------|---|
| |  |
| Model | QNA-T310G1T |
| description | Single-port Thunderbolt 3 to single-port 10GbE NBASE-T RJ-45 |

*All specifications are subject to change without notice



QNAP SYSTEMS, INC.

www.qnap.com

QNAP Systems, Inc.

New Taipei City
Email: sales@qnap.com
Tel: +886 2 2641 2000

QNAP Inc. (USA)

Pomona CA
Email: usasales@qnap.com
Tel: +1-909-595-2782

QNAP Inc. (Canada)

Markham, Ontario
Email: canadasales@qnap.com
Tel: +1-905-947-1000

QNAP GmbH (Germany)

München
Email: desales@qnap.com
Tel: +49-(0)215-4884-2816

QNAP SRL (Italy)

Roma
Email: eusales@qnap.com
Tel: +39-(0)687-738456

QNAP UK Limited

Swindon
Email: uksales@qnap.com
Tel: +44-(0)333-344-2522

QNAP Japan

Tokyo
Email: jpsales@qnap.com
Tel: +81-3-5901-9735



QNAP may make changes to specifications and product descriptions at any time, without notice. Copyright © 2024 QNAP Systems, Inc. All rights reserved.

QNAP® and other names of QNAP Products are proprietary marks or registered trademarks of QNAP Systems, Inc. Other products and company names mentioned herein are trademarks of their respective holders.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.